

$$\text{RoHS} + \text{HF}$$

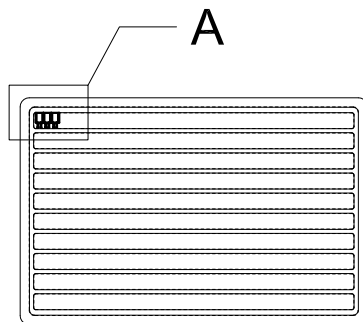
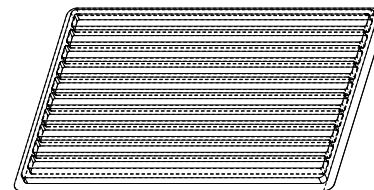

— PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*1	---	5.70	2*7	25.20	30.90
2*2	4.20	9.90	2*8	29.40	35.10
2*3	8.40	14.10	2*9	33.60	39.30
2*4	12.60	18.30	2*10	37.80	43.50
2*5	16.80	22.50	2*11	42.00	47.70
2*6	21.00	26.70	2*12	46.20	51.90

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C42012F9-2XX1XX3	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	21.11.17				
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 4.2mm 双排 90° DIP Wafer 实心针		REV: A0	SHEET: 1/2
			SIZE: A4	0.000±0.10	X°X° ±2°							



WanLian Teconology Co., Ltd

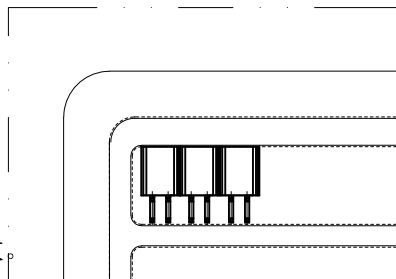
$$\text{RoHS} + \text{HF}$$


10Row XXX/Row=XXXPcs/Tray

-14Tray xXXXPcs=XXXPcs /Box cartion

980	70	2X12P
1120	80	2X11P
1120	80	2X10P
1260	90	2X9P
1540	110	2X8P
1680	120	2X7P
1960	140	2X6P
2380	170	2X5P
2940	210	2X4P
3780	270	2X3P
5460	390	2X2P
9660	690	2X1P
PCS/Carton	PCS/Tray	P0S

1. 盒装产品四周需用胶纸固定；袋装产品封口前需放1-2包干燥剂于内；卷装产品前后需留10-20PCS产品空格。
2. 14盒一捆，共1捆用PE膜缠绕，产品不可少数、多数，方向须一致。
3. 内外包装均需有数量标签，尾数包装需用不影响品质之物品填充并注明尾数。
4. 纸箱规格：45.0*28.5*22.5CM



A

5:1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C42012F9-2XX1XX3	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: 包装规范		
				UNIT:mm	0.00±0.25					X°±3°	
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17	REV: A0	SHEET: 2/2