

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

B±0.50

4.2

3.50

4.20

1.14±0.05

A±0.30

4.20

1.14±0.05

A±0.30

A

4.20

5.50

P.C.B LAYOUT

9.70

12.85±0.25

1.40

3.40

5.50±0.15

6.10±0.15

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	---	5.60	14	25.20	30.80
04	4.20	9.80	16	29.40	35.00
06	8.40	14.00	18	33.60	39.20
08	12.60	18.20	20	37.80	43.40
10	16.80	22.40	22	42.00	47.60
12	21.00	26.60	24	46.20	51.80

NOTE:

1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66/LCP
1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 1.6kgf/PIN MAX
3-2.REMOVAL FORCE: 0.4kgf/PIN MIN
3-3.DURABILITY: 30 CYCLES.

4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 9A
RATED VOLTAGE : 600V AC/DC
4-2.CONTACT RESISTANCE: 10 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1500V

5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.

6.PACKAGE SPEC: TRAY

7.P/N:
C42013 F 0-2 XX 1 X X X

SERIES NO:
MALE FEMALE:
F-FEMALE

ANGLE:
0-180°
9-90°

ROW NO:
2-DOUBLE ROW

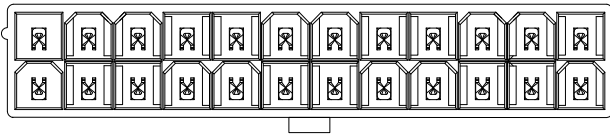
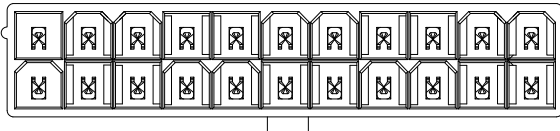
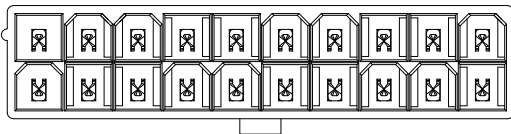
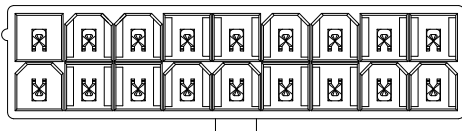
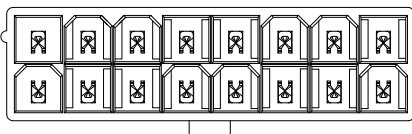
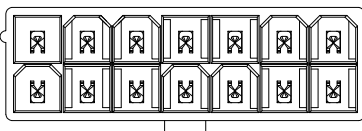
PIN Q'PY:
02~24

TERMIPOINT:
1-DIP

WATER CODE
0-PA66,UL94V-0
2-PA66,UL94V-2
3-LCP,UL94V-0

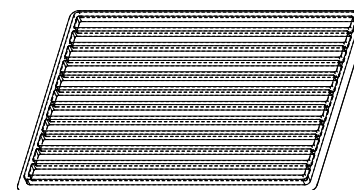


COLOR:
A-BLACK
K-WHITE
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin

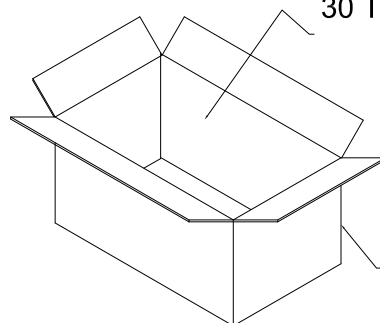
1		2		3		4		5		6		7		8	
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements															
RoHS															
		2*1P								2*12P					
		2*2P								2*11P					
		2*3P								2*10P					
		2*4P								2*9P					
		2*5P								2*8P					
		2*6P								2*7P					

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements



RoHS



30 Trays/Box carton



– Material: $K=K$


$$\frac{A}{4:1}$$

Circuits	PCS/Tray	30Trays/Carton	Circuits	PCS/Tray	30Trays/Carton
2*1P 无柱			2*7P 无柱	121	3630
2*2P 无柱	374	11220	2*8P 无柱	99	2970
2*3P 无柱	264	7920	2*9P 无柱	88	2640
2*4P 无柱	198	5940	2*10P 无柱	88	2640
2*5P 无柱	165	4950	2*11P 无柱	77	2310
2*6P 无柱	132	3960	2*12P 无柱	66	1980

注意事项:

- 1.盒装产品四周需用胶纸固定（一盘一盖）；袋装产品封口前需放1-2包干燥剂于内；卷装产品前后需留10-20PCS产品空格。
- 2.产品不可少数、多数，方向须一致。
- 3.内外包装均需有数量标签，尾数包装需用不影响品质之物品填充并注明尾数。
- 4.所有PIN位6盘/捆(用PE膜缠绕)，5捆/箱
- 5.纸箱规格：39.5X28.5X39.5CM

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C42013F0-2XX1XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
				0.0±0.35	X*REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE: 包装图			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang		21.11.17		
											REV: AO	SHEET: 3/3