





The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

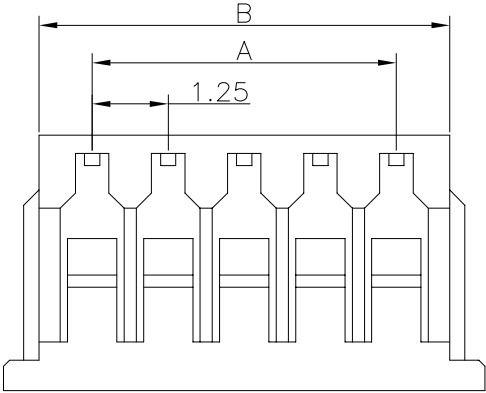

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 0.7kgf/PIN MIN
2-2.DURABILITY: 50 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 125V AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 100MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC:PE BAG
6.P/N ORDER:

SERIES NO: A1251 H M-1 XX X 1
COLOR:
A-BLACK
K-WHITE
S-NATURE
CONNECTOR:
H-HOUSING
MALE FEMALE:
M-MALE
PIN Q'PY:
02~16
ROW NO:
1-SINGLE ROW

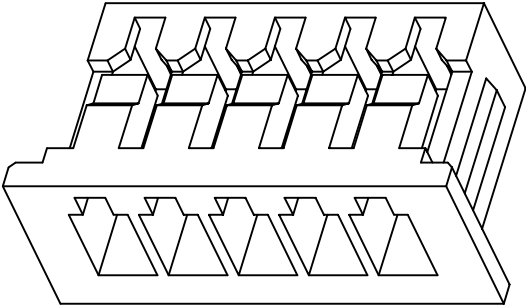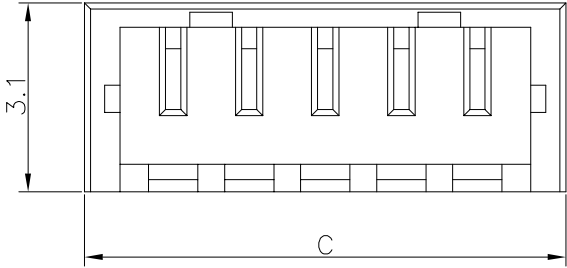

3D VIEW

Ordering Information & Dimensions

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	3.00	4.15	10	11.25	13.00	14.15
03	2.50	4.25	5.40	11	12.50	14.25	15.40
04	3.75	5.50	6.65	12	13.75	15.50	16.65
05	5.00	6.75	7.90	13	15.00	16.75	17.90
06	6.25	8.00	9.15	14	16.25	18.00	19.15
07	7.50	9.25	10.40	15	17.50	19.25	20.40
08	8.75	10.50	11.65	16	18.75	20.50	21.65
09	10.00	11.75	12.90				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1251HM-1XXX1	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12			
				0.0±0.35	X*REF±6°						
				UNIT:mm	0.00±0.25	X*±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch 1.25mm 单排带凸点Housing	
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Zijun_Huang	21.10.12			

WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1