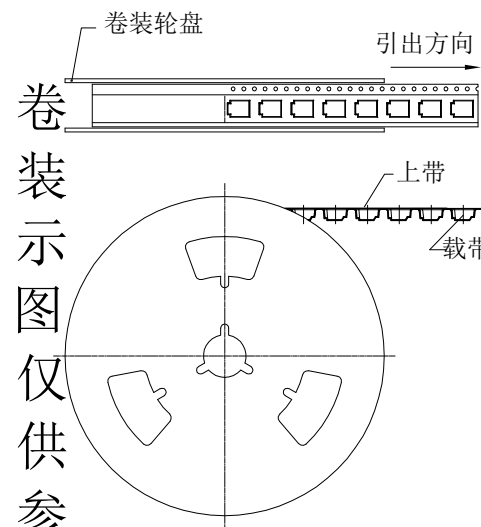
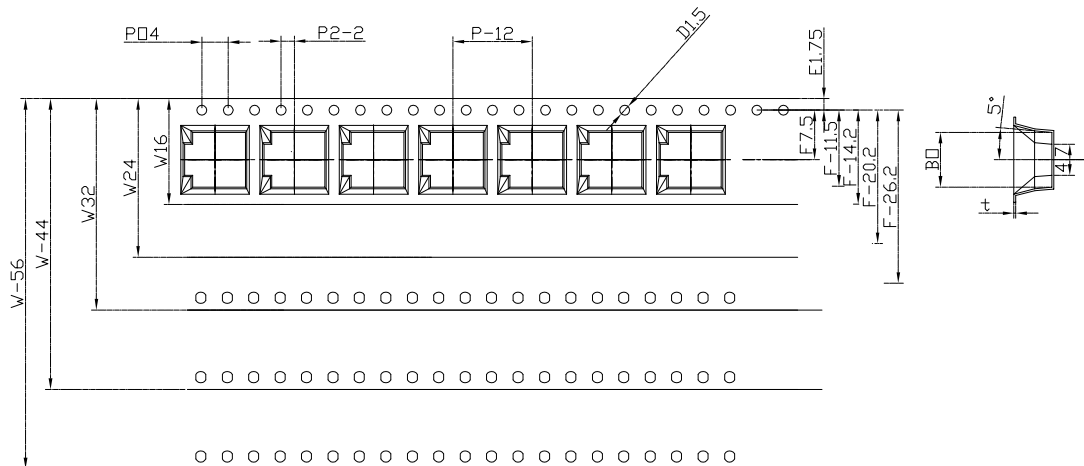


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

$$R_0HS + HF$$


卷装示意图仅供参考

1.25-卧贴系列

	W	B0	F
2P	16.00±0.30	7.80±0.10	7.50±0.10
3P	16.00±0.30	9.05±0.10	7.50±0.10
4P	24.00±0.30	10.3±0.10	11.5±0.10
5P	24.00±0.30	11.55±0.10	11.5±0.10
6P	24.00±0.30	12.8±0.10	11.5±0.10
7P	24.00±0.30	14.05±0.10	11.5±0.10
8P	24.00±0.30	15.30±0.10	11.5±0.10
9P	24.00±0.30	16.55±0.10	11.5±0.10
10P	32.00±0.30	17.80±0.10	14.2±0.10
11P	32.00±0.30	19.05±0.10	14.2±0.10
12P	32.00±0.30	20.30±0.10	14.2±0.10
13P	32.00±0.30	21.55±0.10	14.2±0.10
14P	44.00±0.30	22.80±0.10	20.2±0.10
15P	44.00±0.30	24.05±0.10	20.2±0.10

尺寸栏


E	1.75±0.10
F	7.5±0.10
P2	2.00±0.10
∅D	1.50 $^{+0.10}_{-0.00}$
Po	4.00±0.10
W	16.00±0.30
P	12.0±0.10
Ao	6.10±0.10
B0	7.80±0.10
K0	3.75±0.10
	0.30±0.05

生产参数

模 数	193 模
颗 数	1544 颗
卷 轮	330mm
包装数	1500 颗

说明

1. 10个边孔的累计公差不能超过 $\pm 0.2\text{mm}$ 。
2. 材料规格: PS 白色料抗静电, 厚度 0.3mm。
3. 13英寸卷轮卷装长度: 18.53米, 包装零件总颗数: 1544颗, 前后各空22PCS, 每盘实包颗数: 1500颗
4. 所有尺寸设计参照EIA-481-D。
5. 载带在250mm长度内最大弯曲不能超过1mm 见上图



产品型号	盘装只数	整箱盘数
2.0-02P卧	1000	20R/箱
2.0-03P卧	1000	20R/箱
2.0-04P卧	1000	14R/箱
2.0-05P卧	1000	14R/箱
2.0-06P卧	1000	14R/箱
2.0-07P卧	1000	11R/箱
2.0-08P卧	1000	11R/箱
2.0-09P卧	1000	8R/箱
2.0-10P卧	1000	8R/箱
2.0-11P卧	1000	8R/箱
2.0-12P卧	1000	8R/箱
2.0-13P卧	1000	8R/箱
2.0-14P卧	1000	8R/箱
2.0-15P卧	1000	6R/箱
2.0-16P卧	1000	6R/箱

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: A2001F9-1XX2XX0	DWG. NO: ENDE05	 WanLian Technology Co., Ltd	REV: AO	SHEET: 2/2
AO	NEW RELEASE	21.03.16		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.16					
				0.0±0.35	X° REF±6°								
				UNIT: mm	0.00±0.25	X° ±3°	DESIGNER	Ding_bo	21.03.16	TITLE: WAFER PITCH 2.0mm 卧贴 包装规范			
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	HXY	21.03.16					



REV: AO	SHEET: 2/2
---------	------------