
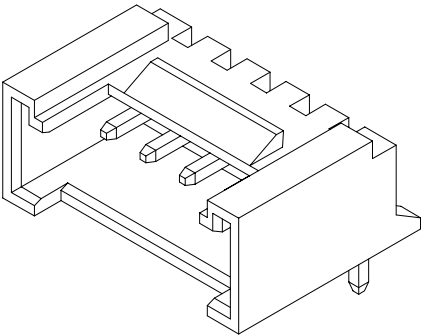
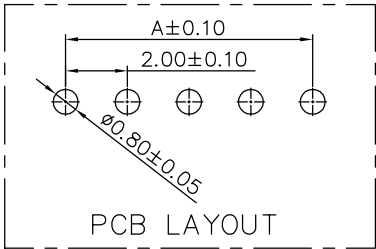
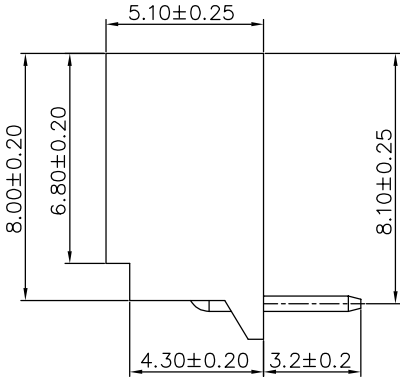
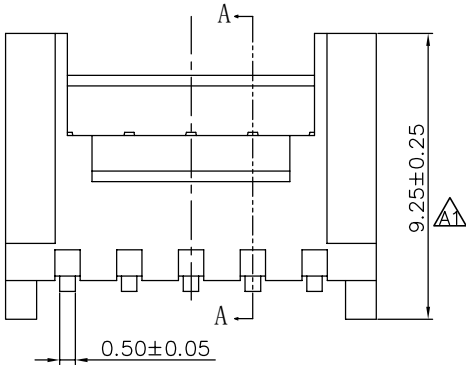



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

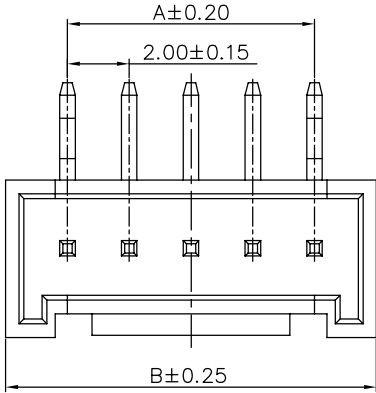

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
1- 2.CONTACTS BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 20V AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC PE BAG
6.P/N:

A20081 F 9-1 XX 1 X X 0
SERIES NO: F
MALE FEMALE: F
F-FEMALE
ANGLE: 9-90°
ROW NO: 1-SINGLE ROW
PIN Q'PY: 02~16
COLOR: K-WHITE(RoHS+HF)
M-BEIGE(高温料)(RoHS)
PLATING: A-ALL AU G/F
C-BRIGHT TIN
TERMIPOINT: 1-DIP

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	12	22.00	26.00
03	4.00	8.00	13	24.00	28.00
04	6.00	10.00	14	26.00	30.00
05	8.00	12.00	15	28.00	32.00
06	10.00	14.00	16	30.00	34.00
07	12.00	16.00	17	32.00	36.00
08	14.00	18.00	18	34.00	38.00
09	16.00	20.00	19	36.00	40.00
10	18.00	22.00	20	38.00	42.00
11	20.00	24.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A20081F9-1XX1XX0	DWG.NO: ENDE05	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	23.08.16			
A1	Dimensional change9.5 to 9.25	23.08.16		0.0±0.35	X*REF±6°				CHECK	XueZe_Ma	23.08.16
			UNIT:mm	0.00±0.25	X*±3°	DRAWN	LanXuan_Hou	23.08.16			
			SIZE: A4	0.000±0.10	X*X' ±2°						