


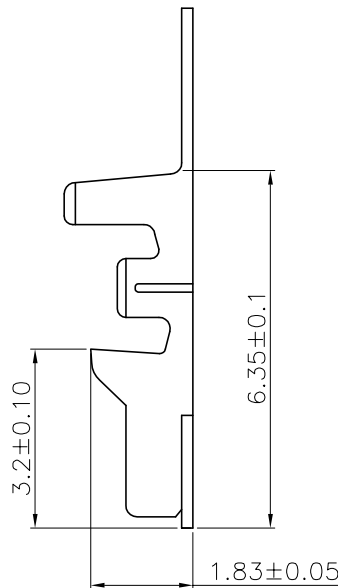


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

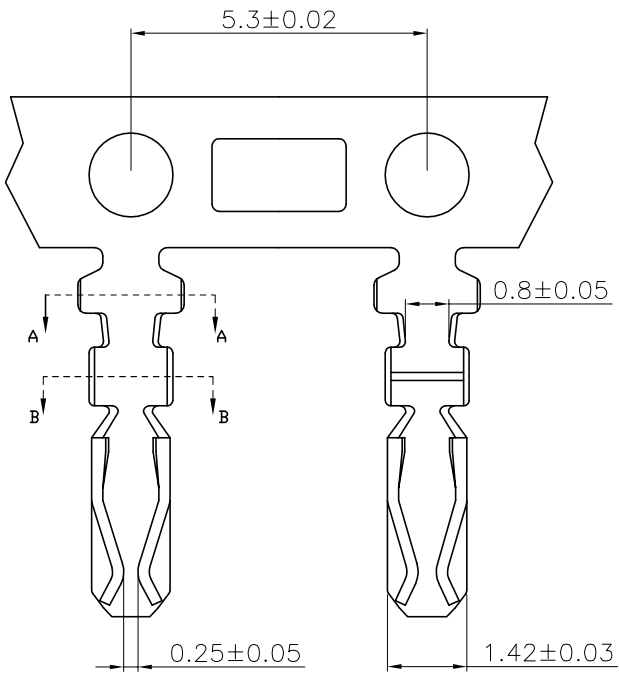

A-A

B-B

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.TERMINAL:SN PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2.0A
4-2.VOLTAGE RATING: 250V MAX
4-3.CONTACT RESISTANCE: 20mΩ Max.
4-4.INSULATION RESISTANCE: 1000MΩ MIN
4-5.DIELECTRIC WITHSTANDING:1000V AC Min
5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:PAPER PLATE
7.P/N ORDER:

SERIES NO: A2008 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.07.14	A2008TFX-X	ENDE05	
A1	DIMENSIONAL CHANGE	23.05.25		0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	23.07.14	TITLE: Pitch2.00mm 180°HY Terminal AWG #28 -#22		REV: A2 SHEET: 1/1
A2	DIMENSIONAL CHANGE	23.07.14		0.00±0.25	X'±3°	DRAWN	LX_HOU	23.07.14			
			UNIT:mm	0.00±0.10	X'X' ±2°						
			SIZE: A4								