


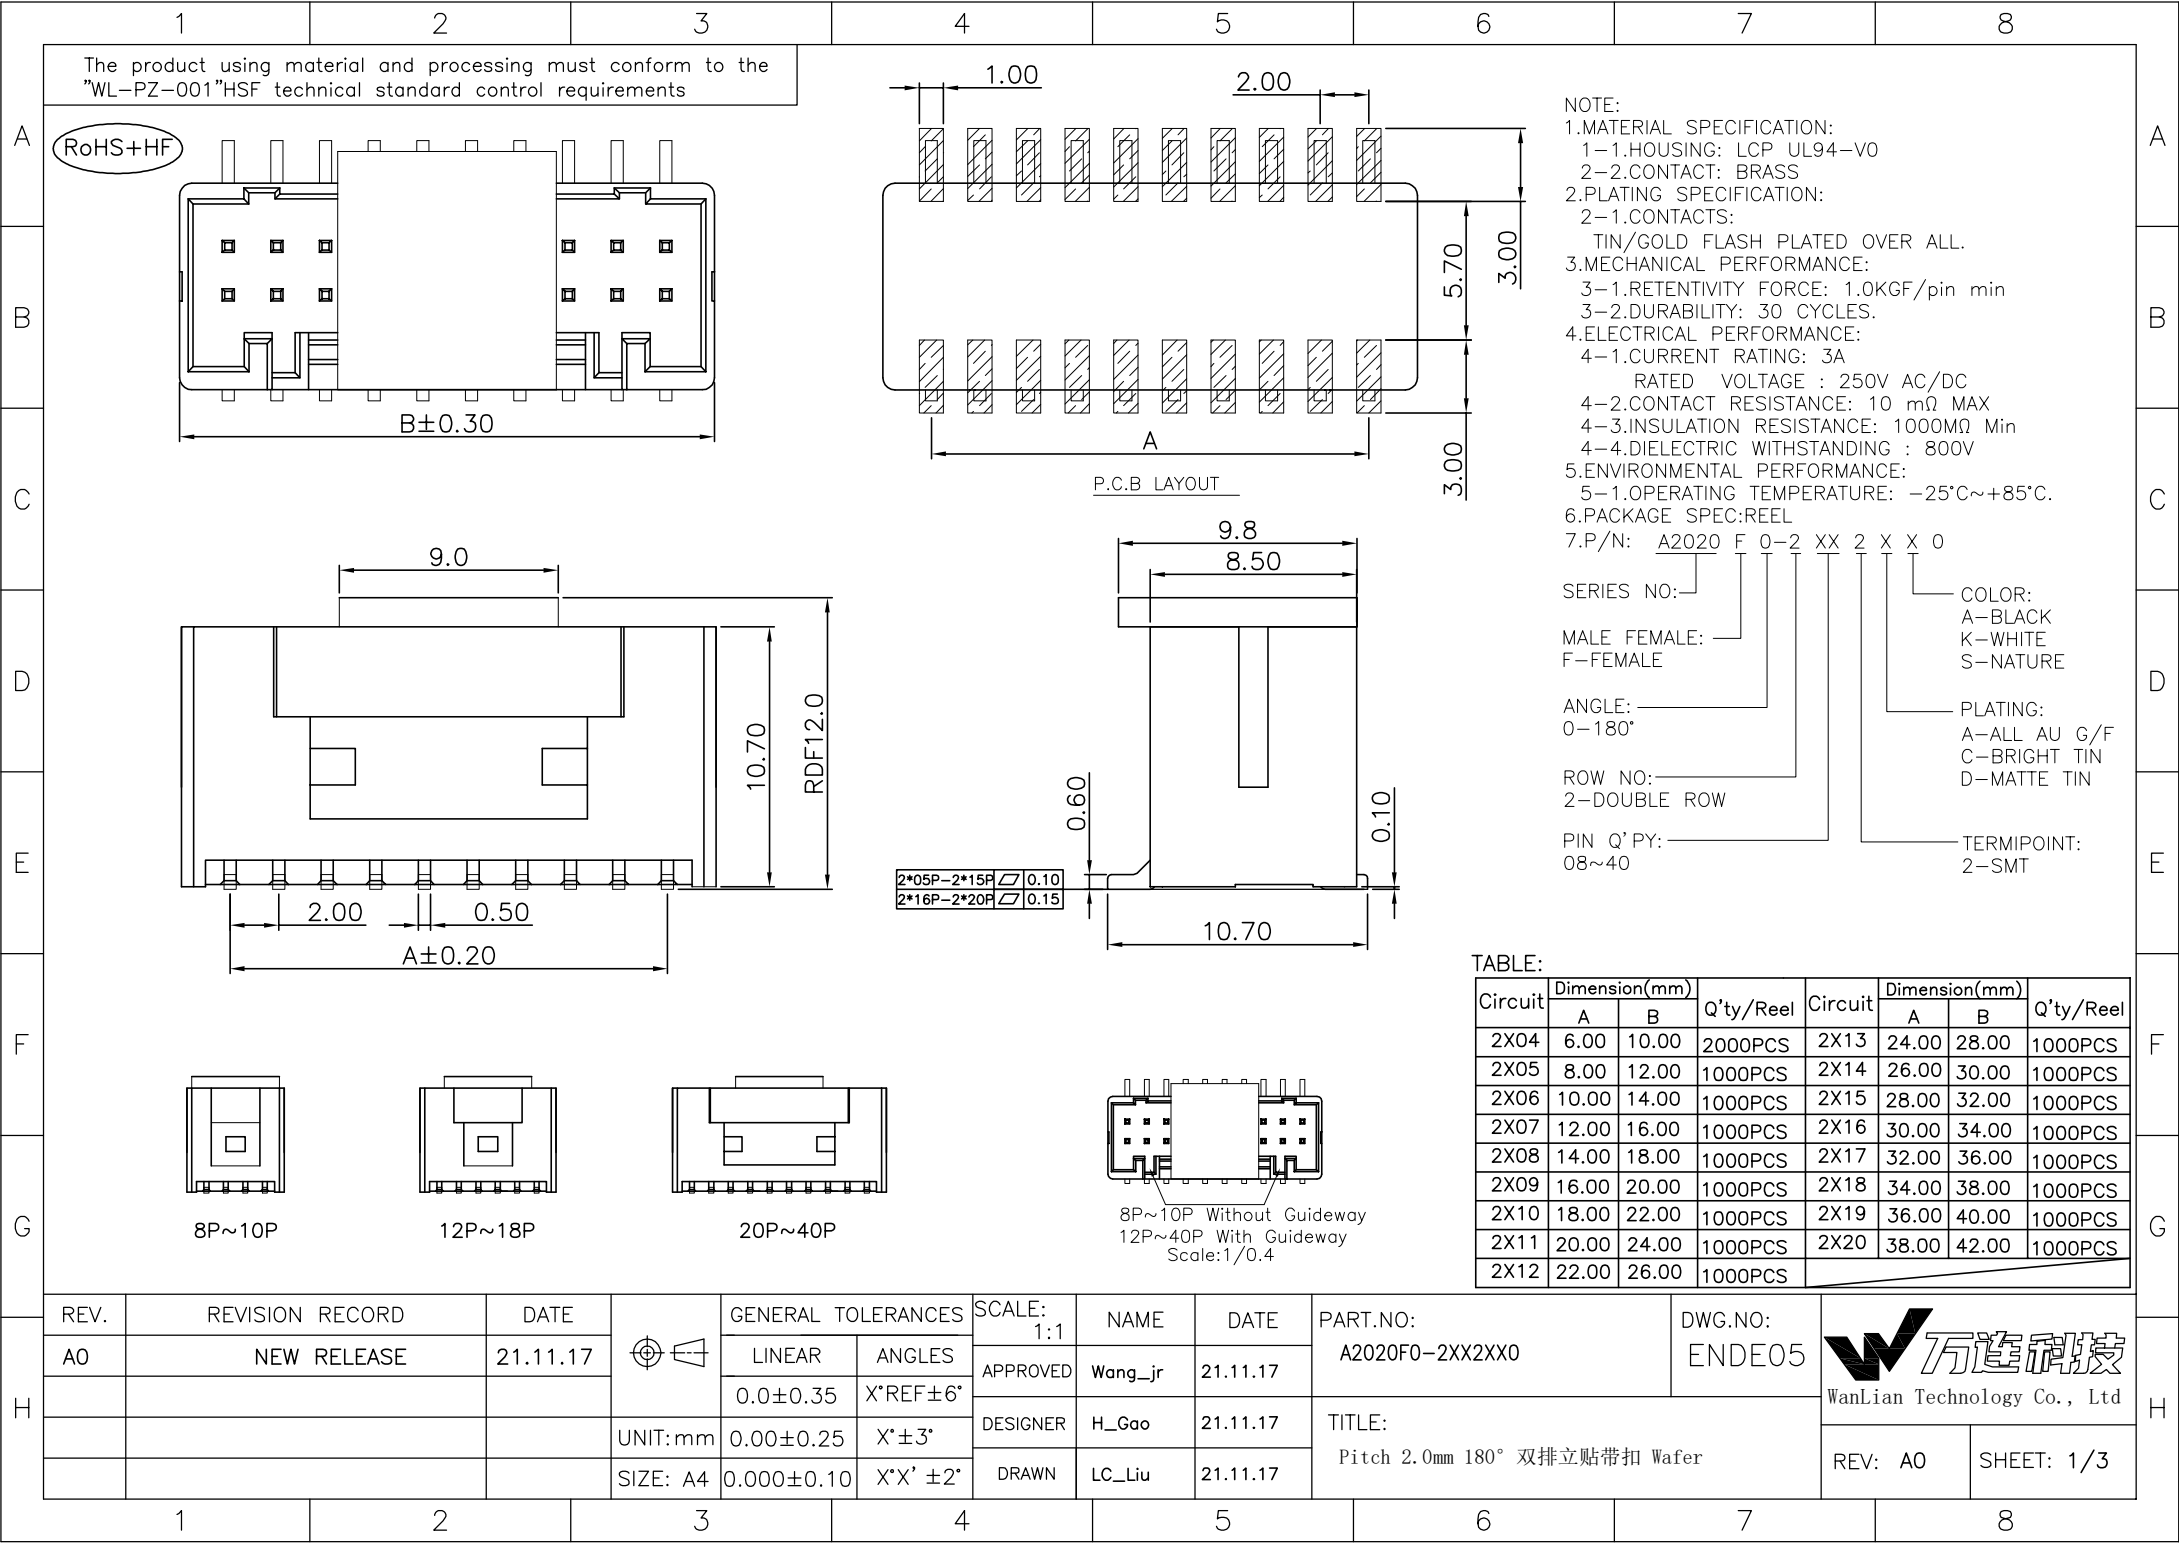

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: LCP UL94-V0
2-2.CONTACT: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/pin min
3-2.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3A
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 10 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 800V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:REEL
7.P/N: A2020 F 0-2 XX 2 X X 0
SERIES NO:
MALE FEMALE:
F-FEMALE
ANGLE:
0-180°
ROW NO:
2-DOUBLE ROW
PIN Q'PY:
08~40
COLOR:
A-BLACK
K-WHITE
S-NATURE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
TERMIPOINT:
2-SMT

TABLE:							
Circuit	Dimension(mm)		Q'ty/Reel	Circuit	Dimension(mm)		Q'ty/Reel
	A	B			A	B	
2X04	6.00	10.00	2000PCS	2X13	24.00	28.00	1000PCS
2X05	8.00	12.00	1000PCS	2X14	26.00	30.00	1000PCS
2X06	10.00	14.00	1000PCS	2X15	28.00	32.00	1000PCS
2X07	12.00	16.00	1000PCS	2X16	30.00	34.00	1000PCS
2X08	14.00	18.00	1000PCS	2X17	32.00	36.00	1000PCS
2X09	16.00	20.00	1000PCS	2X18	34.00	38.00	1000PCS
2X10	18.00	22.00	1000PCS	2X19	36.00	40.00	1000PCS
2X11	20.00	24.00	1000PCS	2X20	38.00	42.00	1000PCS
2X12	22.00	26.00	1000PCS				


















REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	A2020F0-2XX2XX0	ENDE05
			0.0±0.35	X'REF±6°	DESIGNER	H_Gao	21.11.17	TITLE: Pitch 2.0mm 180° 双排立贴带扣 Wafer	
			UNIT:mm	X'±3°	DRAWN	LC_Liu	21.11.17		
			SIZE: A4	0.000±0.10					




WanLian Technology Co., Ltd

REV: A0


SHEET: 1/3

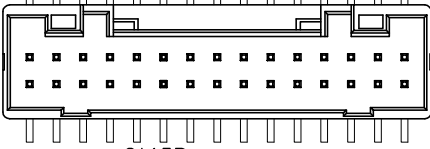	1	2	3	4	5	6	7	8																																																									
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements																																																																	
A	RoHS+HF																																																																
B			2*04P	2*10P	2*20P																																																												
C																																																																	
D			2*05P	2*11P	2*19P																																																												
E																																																																	
F			2*06P	2*12P	2*18P																																																												
G																																																																	
H			2*07P	2*13P	2*17P																																																												
																																																																	
			2*08P	2*14P	2*16P																																																												
																																																																	
			2*09P	2*15P																																																													
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td>PART.NO:</td><td>DWG.NO:</td><td colspan="2" rowspan="3"> WanLian Technology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td><td colspan="2">A2020F0-2XX2XX0</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X°REF±6°</td><td>DESIGNER</td><td>H_Gao</td><td>21.11.17</td><td colspan="2">TITLE: Pitch 2.0mm 180o双排立贴带扣 Wafer</td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td>LC_Liu</td><td>21.11.17</td><td>REV: A0</td><td>SHEET: 2/3</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>									REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd		AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	A2020F0-2XX2XX0					0.0±0.35	X°REF±6°	DESIGNER	H_Gao	21.11.17	TITLE: Pitch 2.0mm 180o双排立贴带扣 Wafer					UNIT:mm	0.00±0.25	X°±3°	DRAWN	LC_Liu	21.11.17	REV: A0	SHEET: 2/3				SIZE: A4	0.000±0.10	X°X' ±2°							
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd																																																						
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	A2020F0-2XX2XX0																																																								
				0.0±0.35	X°REF±6°	DESIGNER	H_Gao	21.11.17	TITLE: Pitch 2.0mm 180o双排立贴带扣 Wafer																																																								
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LC_Liu	21.11.17	REV: A0	SHEET: 2/3																																																						
			SIZE: A4	0.000±0.10	X°X' ±2°																																																												
	1	2	3	4	5	6	7	8																																																									


RoHS+HF




2*04P




2*10P

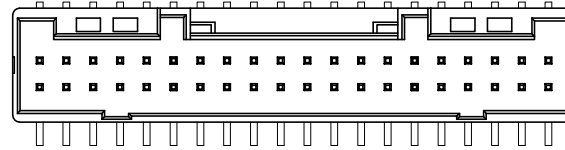


2*20P




2*05P




2*11P




2*19P




2*06P




2*12P




2*18P




2*07P




2*13P




2*17P




2*08P




2*14P




2*16P



2*09P



2*15P

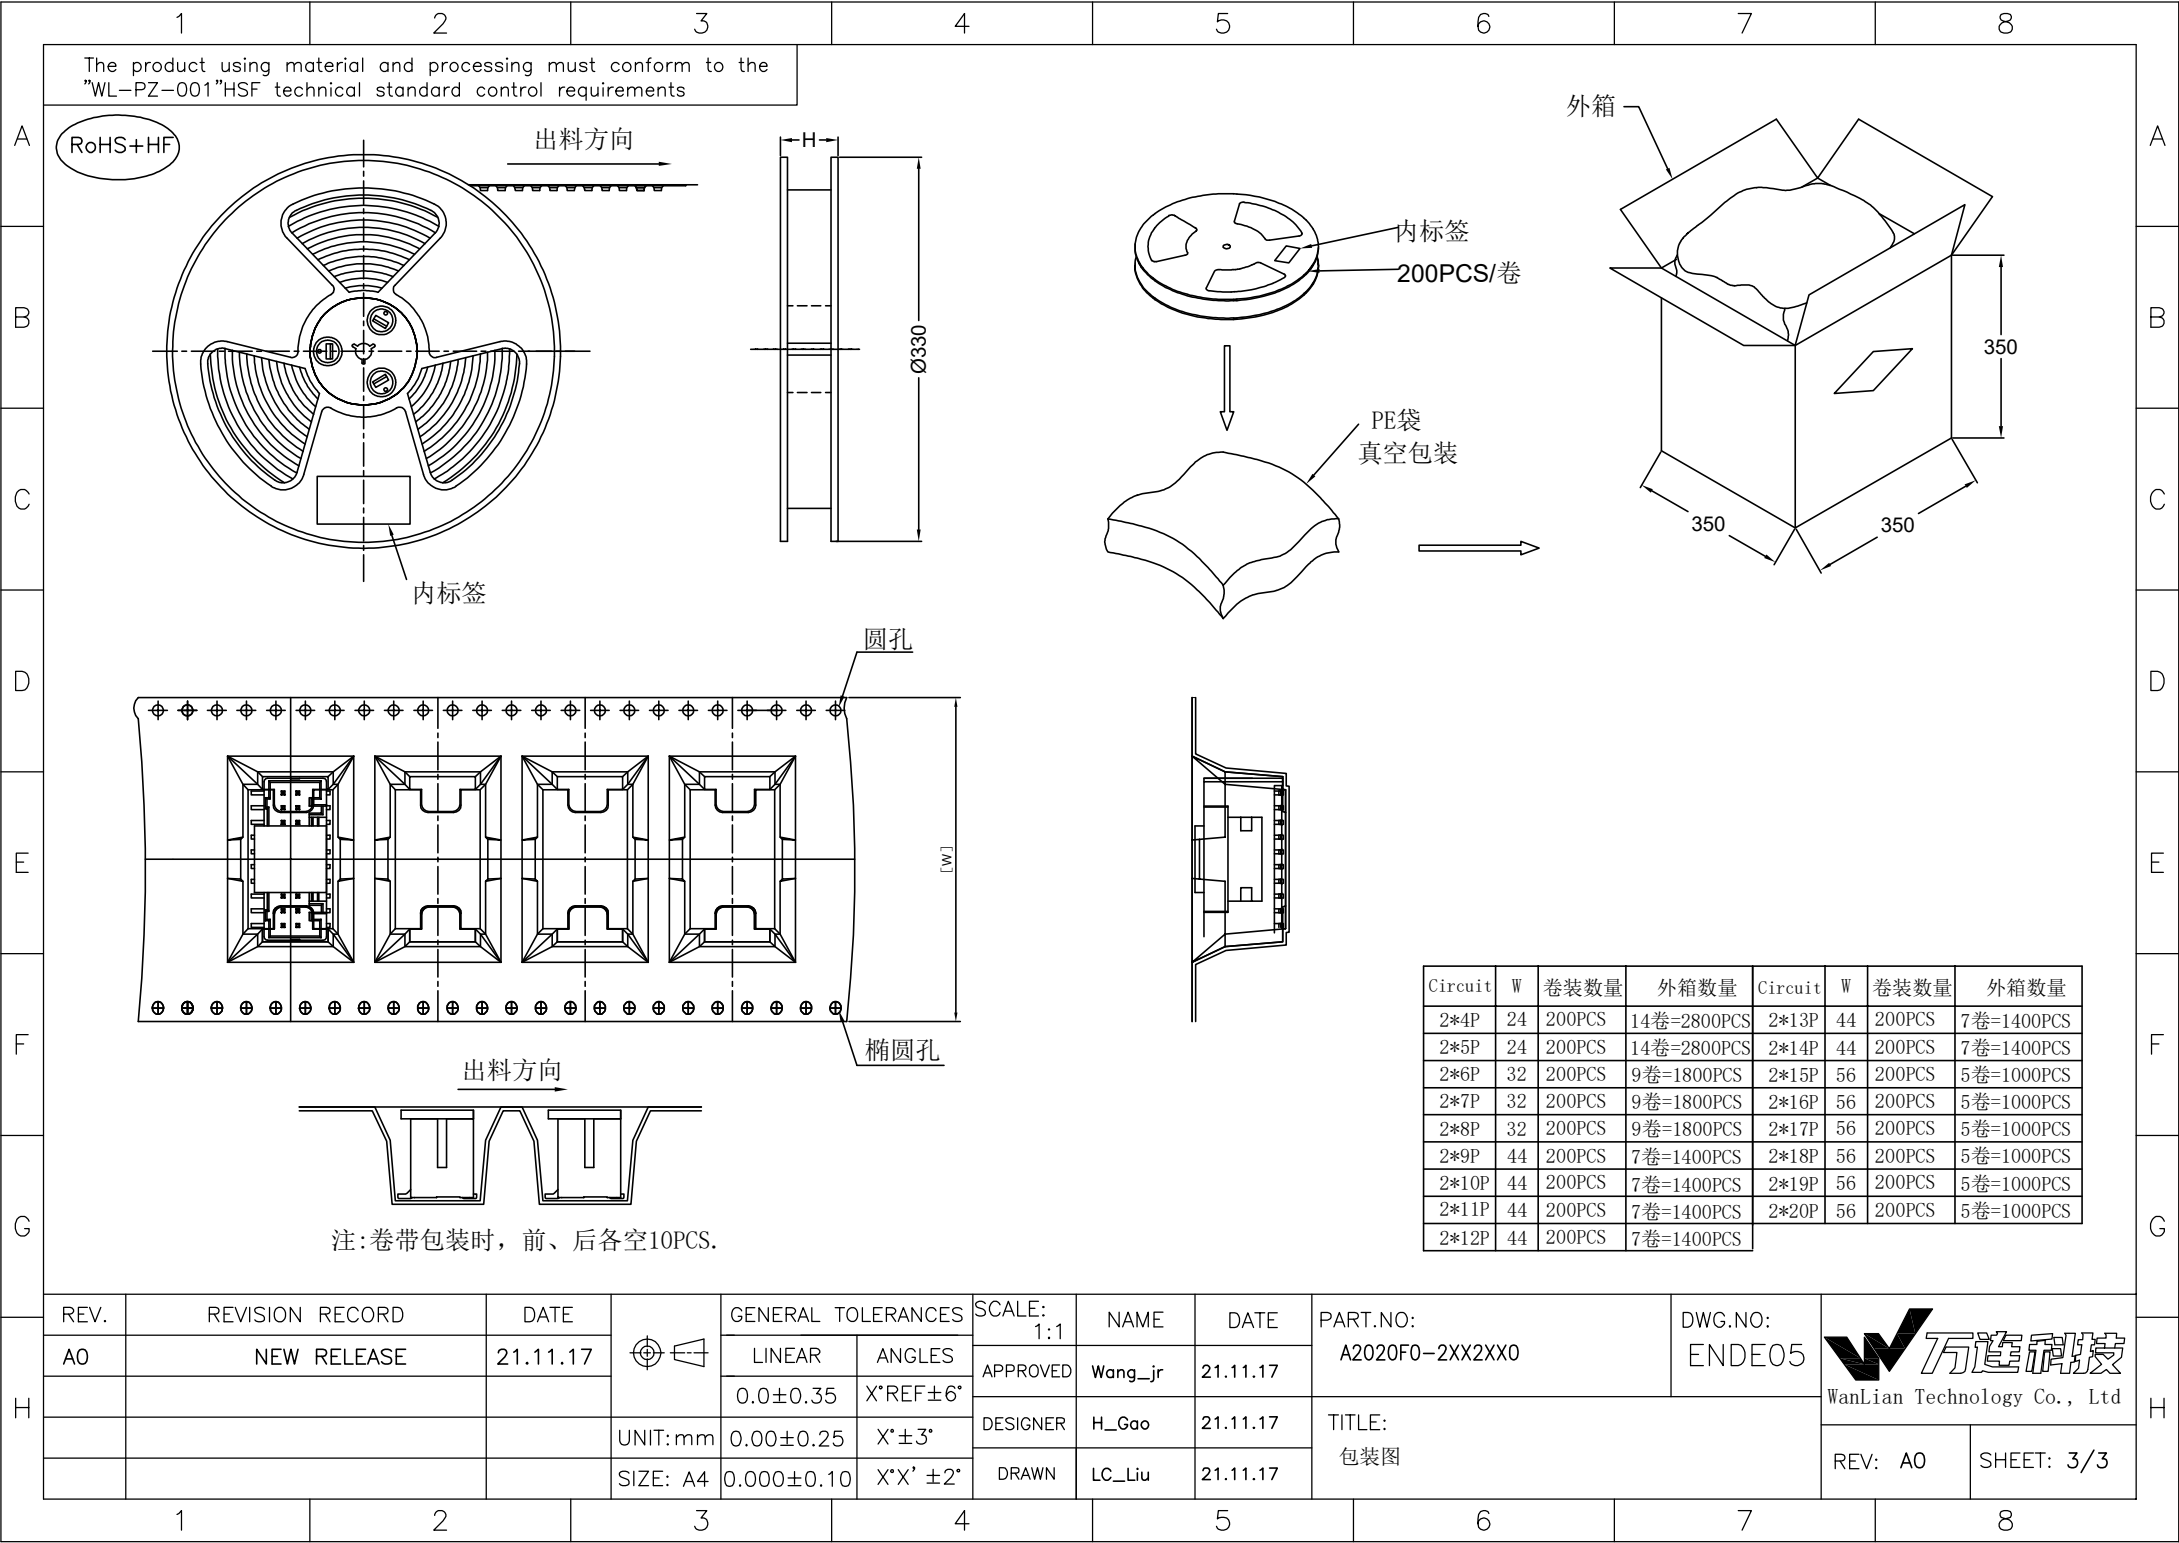

Circuit	W	卷装数量	外箱数量	Circuit	W	卷装数量	外箱数量
2*4P	24	200PCS	14卷=2800PCS	2*13P	44	200PCS	7卷=1400PCS
2*5P	24	200PCS	14卷=2800PCS	2*14P	44	200PCS	7卷=1400PCS
2*6P	32	200PCS	9卷=1800PCS	2*15P	56	200PCS	5卷=1000PCS
2*7P	32	200PCS	9卷=1800PCS	2*16P	56	200PCS	5卷=1000PCS
2*8P	32	200PCS	9卷=1800PCS	2*17P	56	200PCS	5卷=1000PCS
2*9P	44	200PCS	7卷=1400PCS	2*18P	56	200PCS	5卷=1000PCS
2*10P	44	200PCS	7卷=1400PCS	2*19P	56	200PCS	5卷=1000PCS
2*11P	44	200PCS	7卷=1400PCS	2*20P	56	200PCS	5卷=1000PCS
2*12P	44	200PCS	7卷=1400PCS				

注:卷带包装时,前、后各空10PCS.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2020F0-2XX2XX0	DWG.NO: ENDE05	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
				0.0±0.35	X*REF±6°						
				UNIT:mm	0.00±0.25	X*±3°	DESIGNER	H_Gao	21.11.17	TITLE: 包装图	
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LC_Liu	21.11.17	REV: A0		SHEET: 3/3