

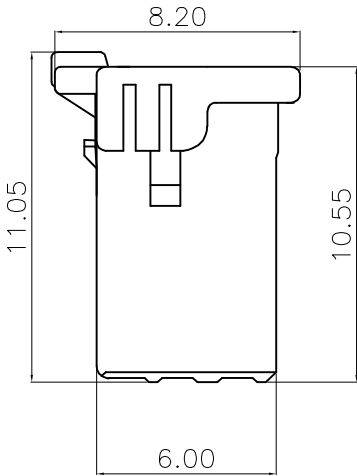


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

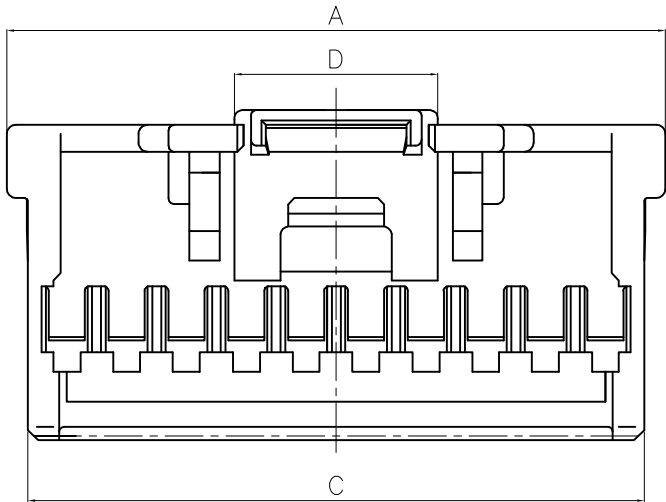

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 1.0kgf MAX
3-2.REMOVAL FORCE: 0.1kgf MIN
3-3.DURABILITY: 25 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 3A
RATED VOLTAGE : 250V
3-2.INSULATION RESISTANCE: 1000MΩ MIN
3-3.CONTACT RESISTANCE :20mΩ MAX
3-4.WITHSTANDING VOLTAGE: 1000V AC
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC:PE BAG
6.P/N: A2036 H 1 M-2 XX X 0
SERIES NO: _____
CONNECTOR: _____
H-HOUSING
TYPE CODE: _____
MALE FEMALE: _____
M-MALE
COLOR:
A-BLACK
K-WHITE
S-NATURE
PIN Q'PY:
10~40
ROW NO:
2-DOUBLE ROW

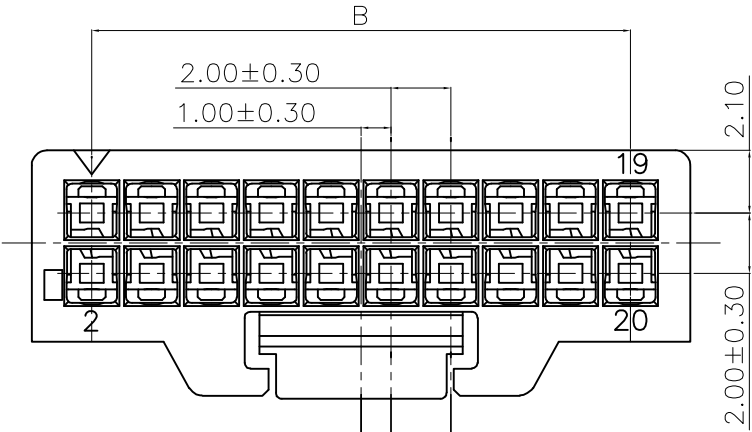

6.8	40.6	38	42	2X20
6.8	38.6	36	40	2X19
6.8	36.6	34	38	2X18
6.8	34.6	32	36	2X17
6.8	32.6	30	34	2X16
6.8	30.6	28	32	2X15
6.8	28.6	26	30	2X14
6.8	26.6	24	28	2X13
6.8	24.6	22	26	2X12
6.8	22.6	20	24	2X11
6.8	20.6	18	22	2X10
6.8	18.6	16	20	2X09
6.8	16.6	14	18	2X08
6.8	14.6	12	16	2X07
6.8	12.6	10	14	2X06
5.1	10.6	8	12	2X05
D	C	B	A	CKT.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	A2036H1M-2XXX0	ENDE05	
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE:		
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.01.13	Pitch2.00mm 双排带扣Housing		
			SIZE: A4	0.000±0.10	X°X' ±2°						