
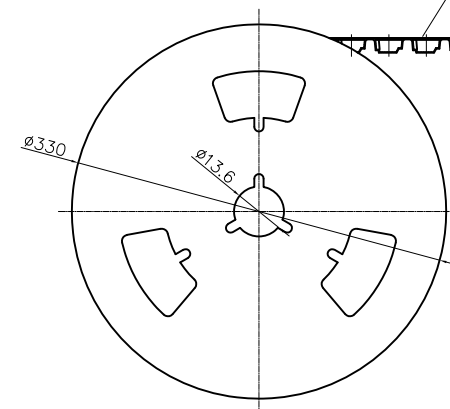

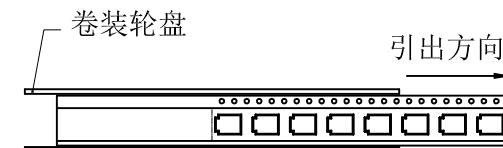




$$\text{RoHS} + \text{HF}$$


1.上帶剥离力:

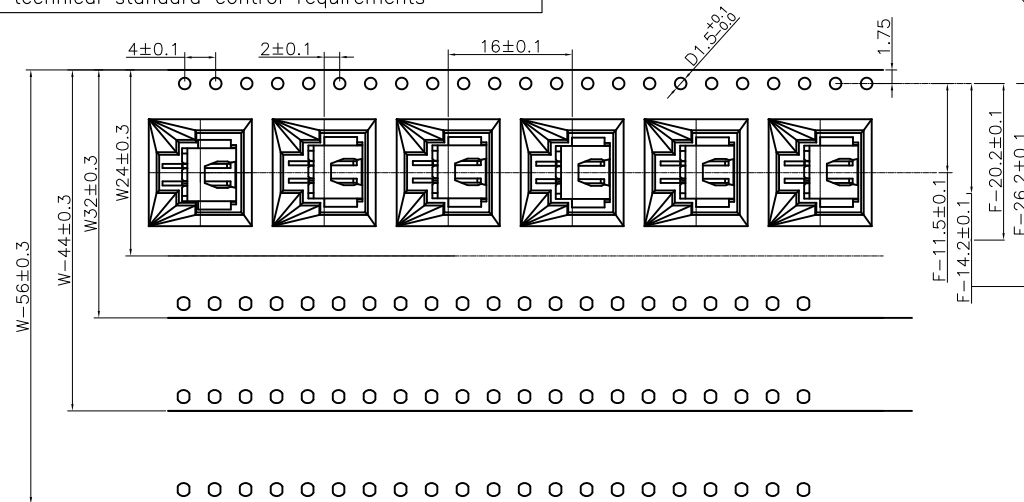


2.带子预空格:

A	15°~0°
F	20°~70°(q)

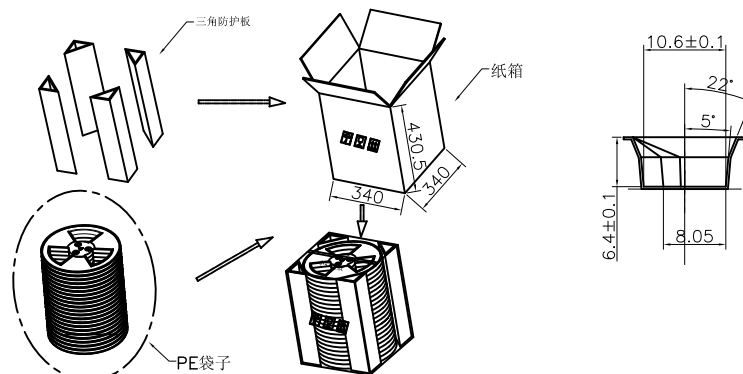

Circuits	裁带尺寸			Circuits	裁带尺寸			卷装包装明细表			
	W	B0	F		W	B0	F	PIN位	每卷包装数	每件盘数	每件数量
02	24.0	10.25	11.50	14	56.0	40.25	26.20	02-04	700(PCS)	14 (盘)	9.8(K)
03	24.0	12.75	11.50	16	56.0	45.25	26.20	05-06	700(PCS)	11 (盘)	7.7(K)
04	24.0	15.25	11.50					07-08	700(PCS)	8 (盘)	5.6(K)
05	32.0	17.75	14.20								
06	32.0	20.25	14.20								
07	44.0	22.75	20.20								
08	44.0	25.25	20.20								
09	44.0	27.75	20.20								
10	44.0	30.25	20.20								
11	44.0	32.75	20.20								

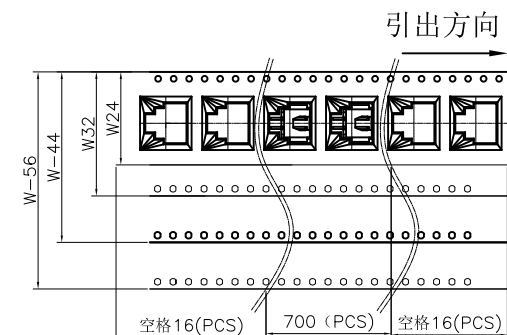

3. 载带材料规格: PS 白色料抗静电, 厚度 0.30mm.

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A25011F9-1XX2XX0	DWG.NO: ENDE05		
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X*REF±6°							
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Longcan_Liu	21.01.13			
									TITLE: PITCH2.50mm 90°XH单排卧贴 WAFER PACKAGE DRAWING		REV: AO	SHEET: 2/2