


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

</

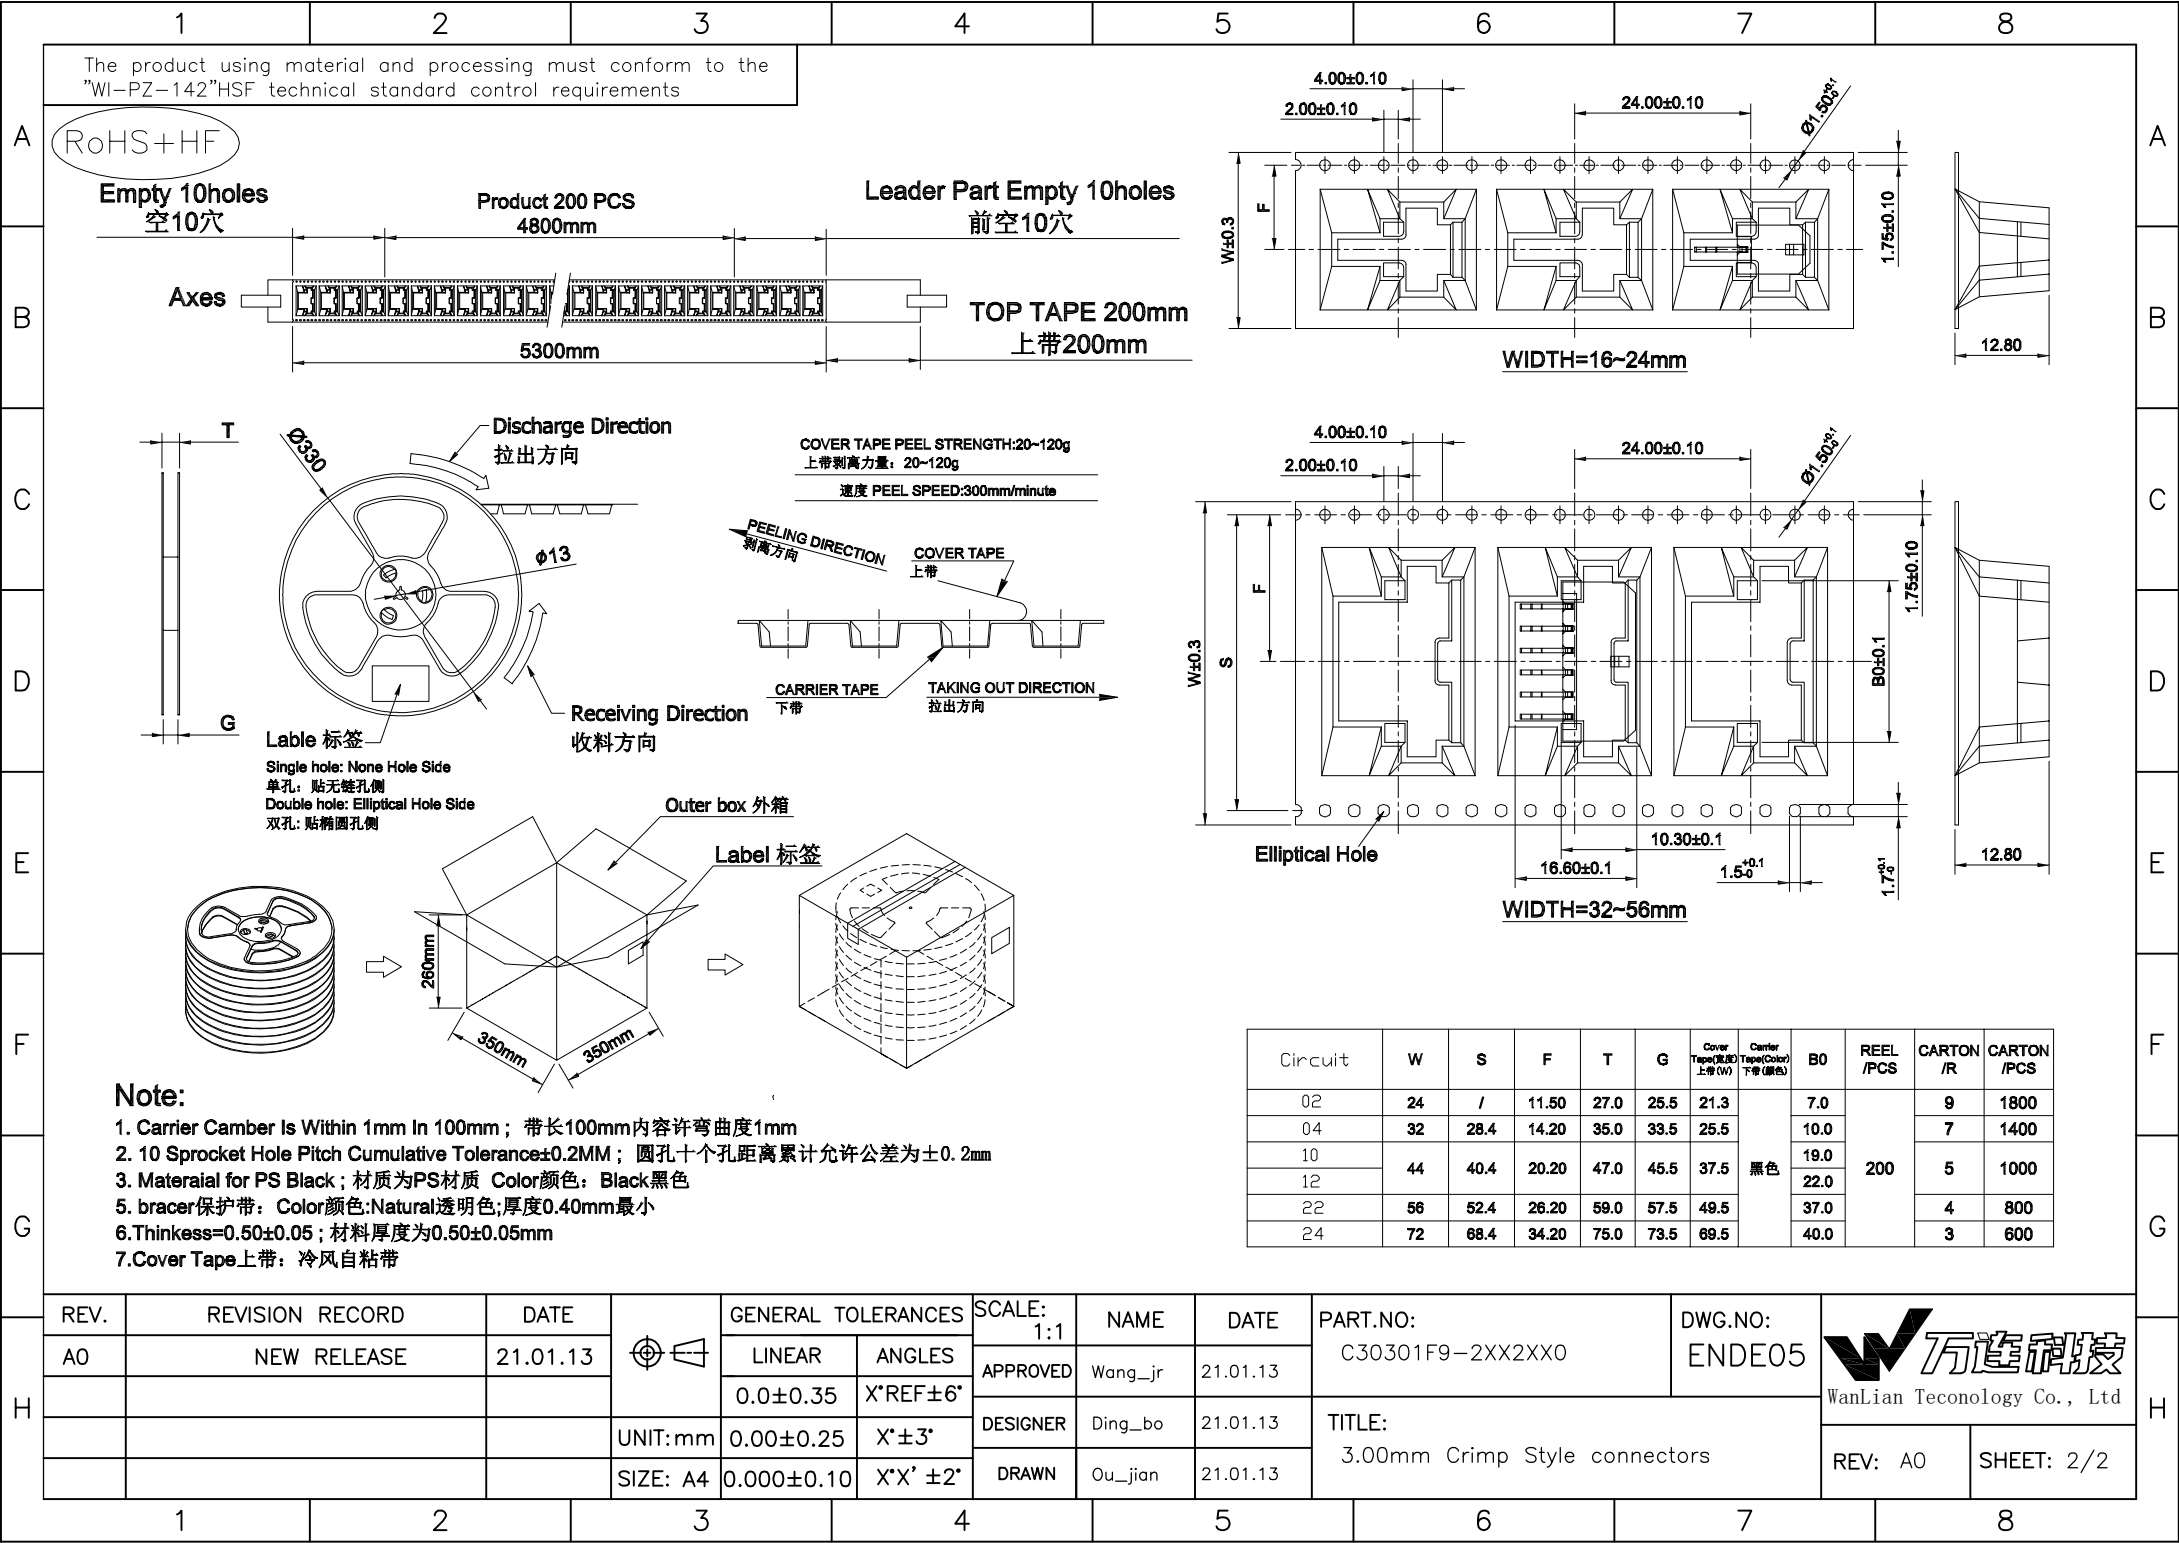

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

Empty 10holes
空10穴

Product 200 PCS
4800mm

Leader Part Empty 10holes
前空10穴

Axes

TOP TAPE 200mm
上带200mm

Discharge Direction
拉出方向

COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

PEELING DIRECTION
剥离方向

COVER TAPE
上带

CARRIER TAPE
下带

TAKING OUT DIRECTION
拉出方向

Receiving Direction
收料方向

Lable 标签

Single hole: None Hole Side

单孔: 贴无缝孔侧

Double hole: Elliptical Hole Side

双孔: 贴椭圆孔侧

Outer box 外箱

Label 标签

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
3. Material for PS Black ; 材质为PS材质 Color颜色: Black黑色
5. bracer保护带: Color颜色:Natural透明色;厚度0.40mm最小
6. Thickness=0.50±0.05 ; 材料厚度为0.50±0.05mm
7. Cover Tape上带: 冷风自粘带

Circuit	W	S	F	T	G	Cover Tape(宽B) 上带(W)	Carrier Tape(宽C) 下带(Color)	B0	REEL /PCS	CARTON /R	CARTON /PCS
02	24	/	11.50	27.0	25.5	21.3	黑色	7.0	200	9	1800
04	32	28.4	14.20	35.0	33.5	25.5		10.0		7	1400
10	44	40.4	20.20	47.0	45.5	37.5		19.0		5	1000
12								22.0			
22								37.0			
24	72	68.4	34.20	75.0	73.5	69.5	40.0	3	600		

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	C30301F9-2XX2XX0	ENDE05		
			UNIT:mm	0.0±0.35	X'REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE: 3.00mm Crimp Style connectors		REV: A0	SHEET: 2/2
				0.00±0.25	X'±3'	DRAWN	Ou_jian	21.01.13				
			SIZE: A4	0.000±0.10	X'X'±2'							