




The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements




RoHS

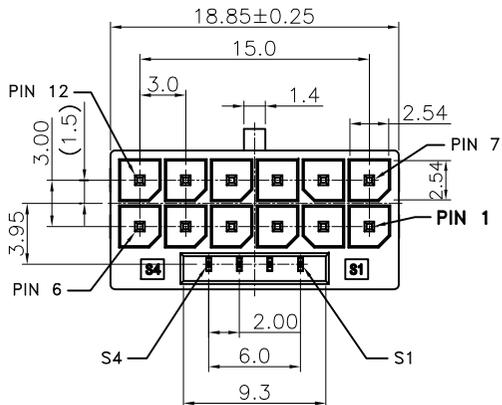

3D VIEW

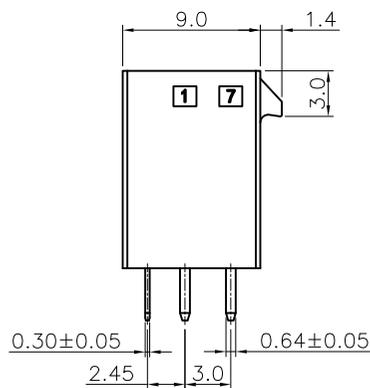

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STABLE
S2	CARD_CBL_PRES#
S3	SENSE0
S4	DO NOT USF

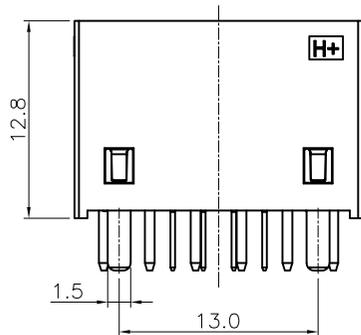

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA9T,UL94V-0
 - CONTACTS: HIGH CONDUCTIVITY COPPER C1100
 - SOLDER TABS: PHOSPHOR BRONZE
 - PLATING SPECIFICATION:
 - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - SOLDER TABS: TIN/GOLD FLASH PLATED OVER ALL.
 - MECHANICAL PERFORMANCE:
 - RETENTIVITY FORCE: 1.4KGf/pin min
 - DURABILITY: 25 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 9.2A AC/DC
RATED VOLTAGE : 250V AC/DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 1500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

SERIES NO: C30303 F 0-2 XX 1 X X 0

MALE FEMALE: F-FEMALE

ANGLE: 9-90°
0-180°


ROW NO: 2-DOUBLE ROW

PIN Q'PY: 12PIN

COLOR: A-BLACK
K-WHITE
S-NATURE

PLATING: A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin

TERMPIONT: 1-DIP

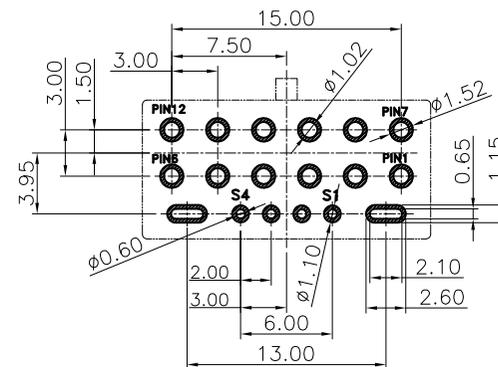

Recommended PCB Layout(Top View)
General Tolerance±0.05mm

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	22.05.09	LINEAR	ANGLES	1:1	Wang_jr	22.05.09	C30303F0-2XX1XX0	ENDE05	
			0.0±0.35	X°REF±6°	APPROVED	Han_Gao	22.05.09	TITLE:		
			0.00±0.25	X°±3°	DESIGNER	LanXuan_Hou	22.05.09	Pitch 3.0mm Pitch 180° 双排直插带扣		
			0.000±0.10	X°X'±2°	DRAWN			12+4pin Wafer 黑色 镀雾锡		
			UNIT:mm						REV: A0	SHEET: 1/2
			SIZE: A4							

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

TPR白色软胶塞

600±5

13.0

18.5

產品裝入真空管

PE膜捆扎两端

外箱标签

封箱(工字形)

外箱规格:L:650xW:250xH:200

(16管一扎)

包装说明:

1: 将产品按一管30PCS数量装入真空管内, 两头塞入白色软胶塞。

2: 将装好产品的真空管, 用PE膜捆扎两端, 按16管一扎, 9扎为一箱(共144管)封箱, 贴外箱标签。

注: 不满一箱时, 需以填充物填充, 不可有晃动。

PIN/位	包装明细		
	PCS/管	管/箱	PCS/箱
12P+4P	30	144	4320

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C30303F0-2XX1XX0	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09			
			0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE: Pitch 3.0mm Pitch 180° 双排直插带扣 12+4pin Wafer 黑色 镀雾锡 包装图	REV: A0	SHEET: 2/2	
			0.00±0.25	X'±3'	DRAWN	LanXuan_Hou	22.05.09				
			UNIT:mm	0.00±0.10	X'X' ±2'						
			SIZE: A4								