
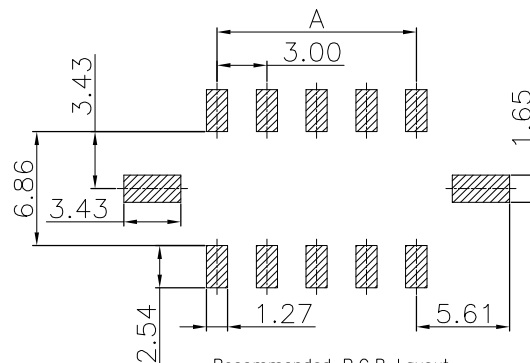
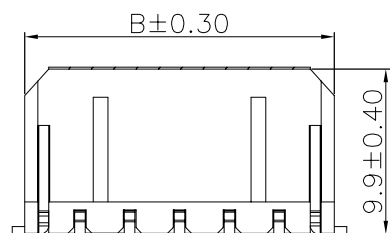
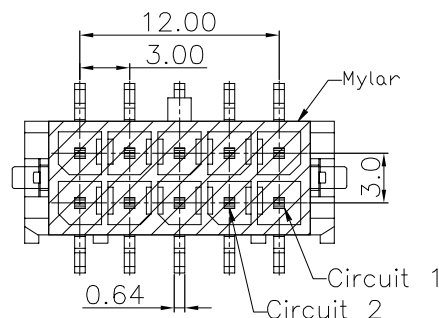


$$\text{RoHS} + \text{HF}$$


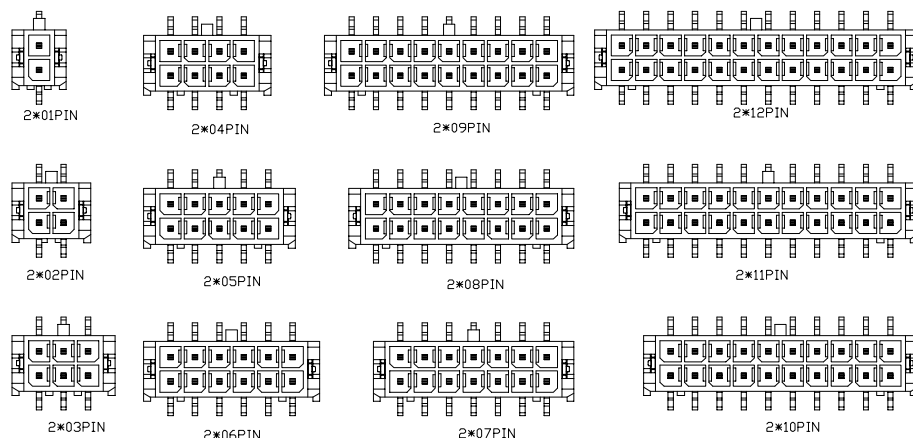
Recommended P.C.B Layout

General Tolerance ± 0.05



7.PART.NO:

C3030 F 0-2 XX 2 X X 0
 SERIES NO: _____
 MALE FEMALE: _____
 F-FEMALE _____
 ANGLE: _____
 9-90° _____
 0-180° _____
 ROW NO: _____
 2-SINGLE ROW _____
 PIN Q'PY: _____
 02~24 _____
 COLOR: _____
 A-BLACK _____
 K-WHITE _____
 S-NATURE _____
 PLATING: _____
 A-ALL AU G/F _____
 C-BRIGHE TIN _____
 D-MATTE Tin _____
 TERMIPOINT: _____
 2-SMT _____



Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
2*01	--	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C3030F0-2XX2XX0	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13			
				0.0±0.35	X'REF±6°						
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Ding_bo	21.01.13	TITLE: 3.00mm Crimp Style connectors		
				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Ou_jian			
										REV: AO	SHEET: 1/2



WanLian Teconology Co., Ltd

REV: A0

SHEET: 1/2

