




Specifications:
 Rated Voltage : 50V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

11002H00-2XNPX-L1-HF-NK

- ① ② ③ ④ ⑤ ⑥ ⑦
- ① Series No.
 - ② H90 : Side Contact
H00 : Up Contact
 - ③ No. of Circuits
 - ④ A: Product color (A--Y)
Blank : Natural type
 - ⑤ L1: Lock catch
 - ⑥ HF : Halogen Free
 - ⑦ NK: No Mark

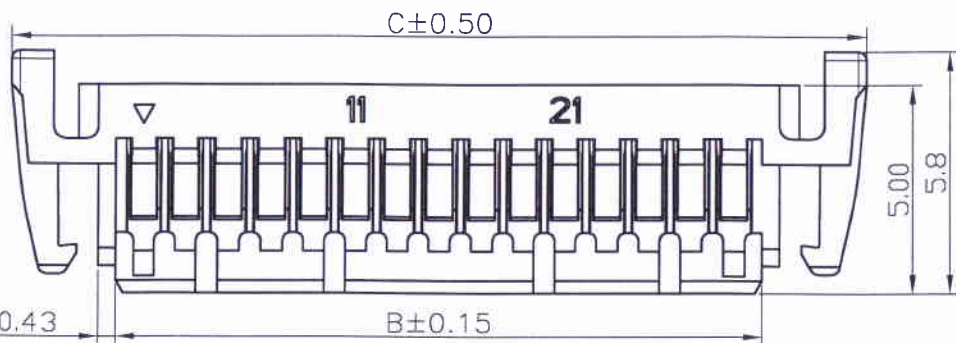

Circuits Part No	Dimensions		
	A	B	C
2x5P	4.00	5.35	10.35
2x6P	5.00	6.35	11.35
2x7P	6.00	7.35	12.35
2x8P	7.00	8.35	13.35
2x9P	8.00	9.35	14.35
2x10P	9.00	10.35	15.35
2x12P	11.00	12.35	17.35
2x15P	14.00	15.35	20.35
2x20P	19.00	20.35	25.35
2x25P	24.00	25.35	30.35

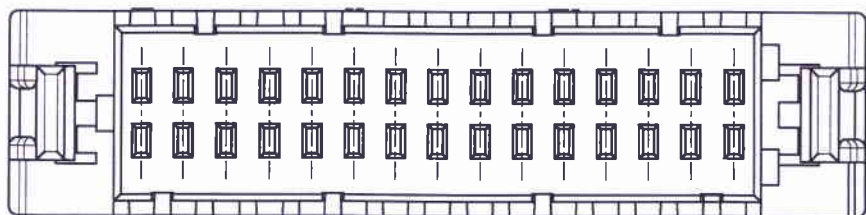


Suitable for JCTC 11002 series terminal

Part No.	Material	Color
11002H00-2XNP-L1-HF-NK	Nylon 66,UL94V-0	Natural(White)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
A0	新图面发行	20.05.26	LINEAR	ANGLES	1:1		
			0.0±0.25	X° REF±6°	APPROVED		
			UNIT: MM	0.00±0.15	DESIGNER		
			SIZE: A4	0.000±0.08	DRAWN	伍文聪	20.05.26

PART. NO:	DWG. NO:	JCTC®	
11002H00-2XNPX-L1-HF-XX	ENDE05	TERMINAL&CONNECTORS	
TITLE: JST 1.00mm PITCH HOUSING 双排带扣		REV: A0	SHEET: 1/2

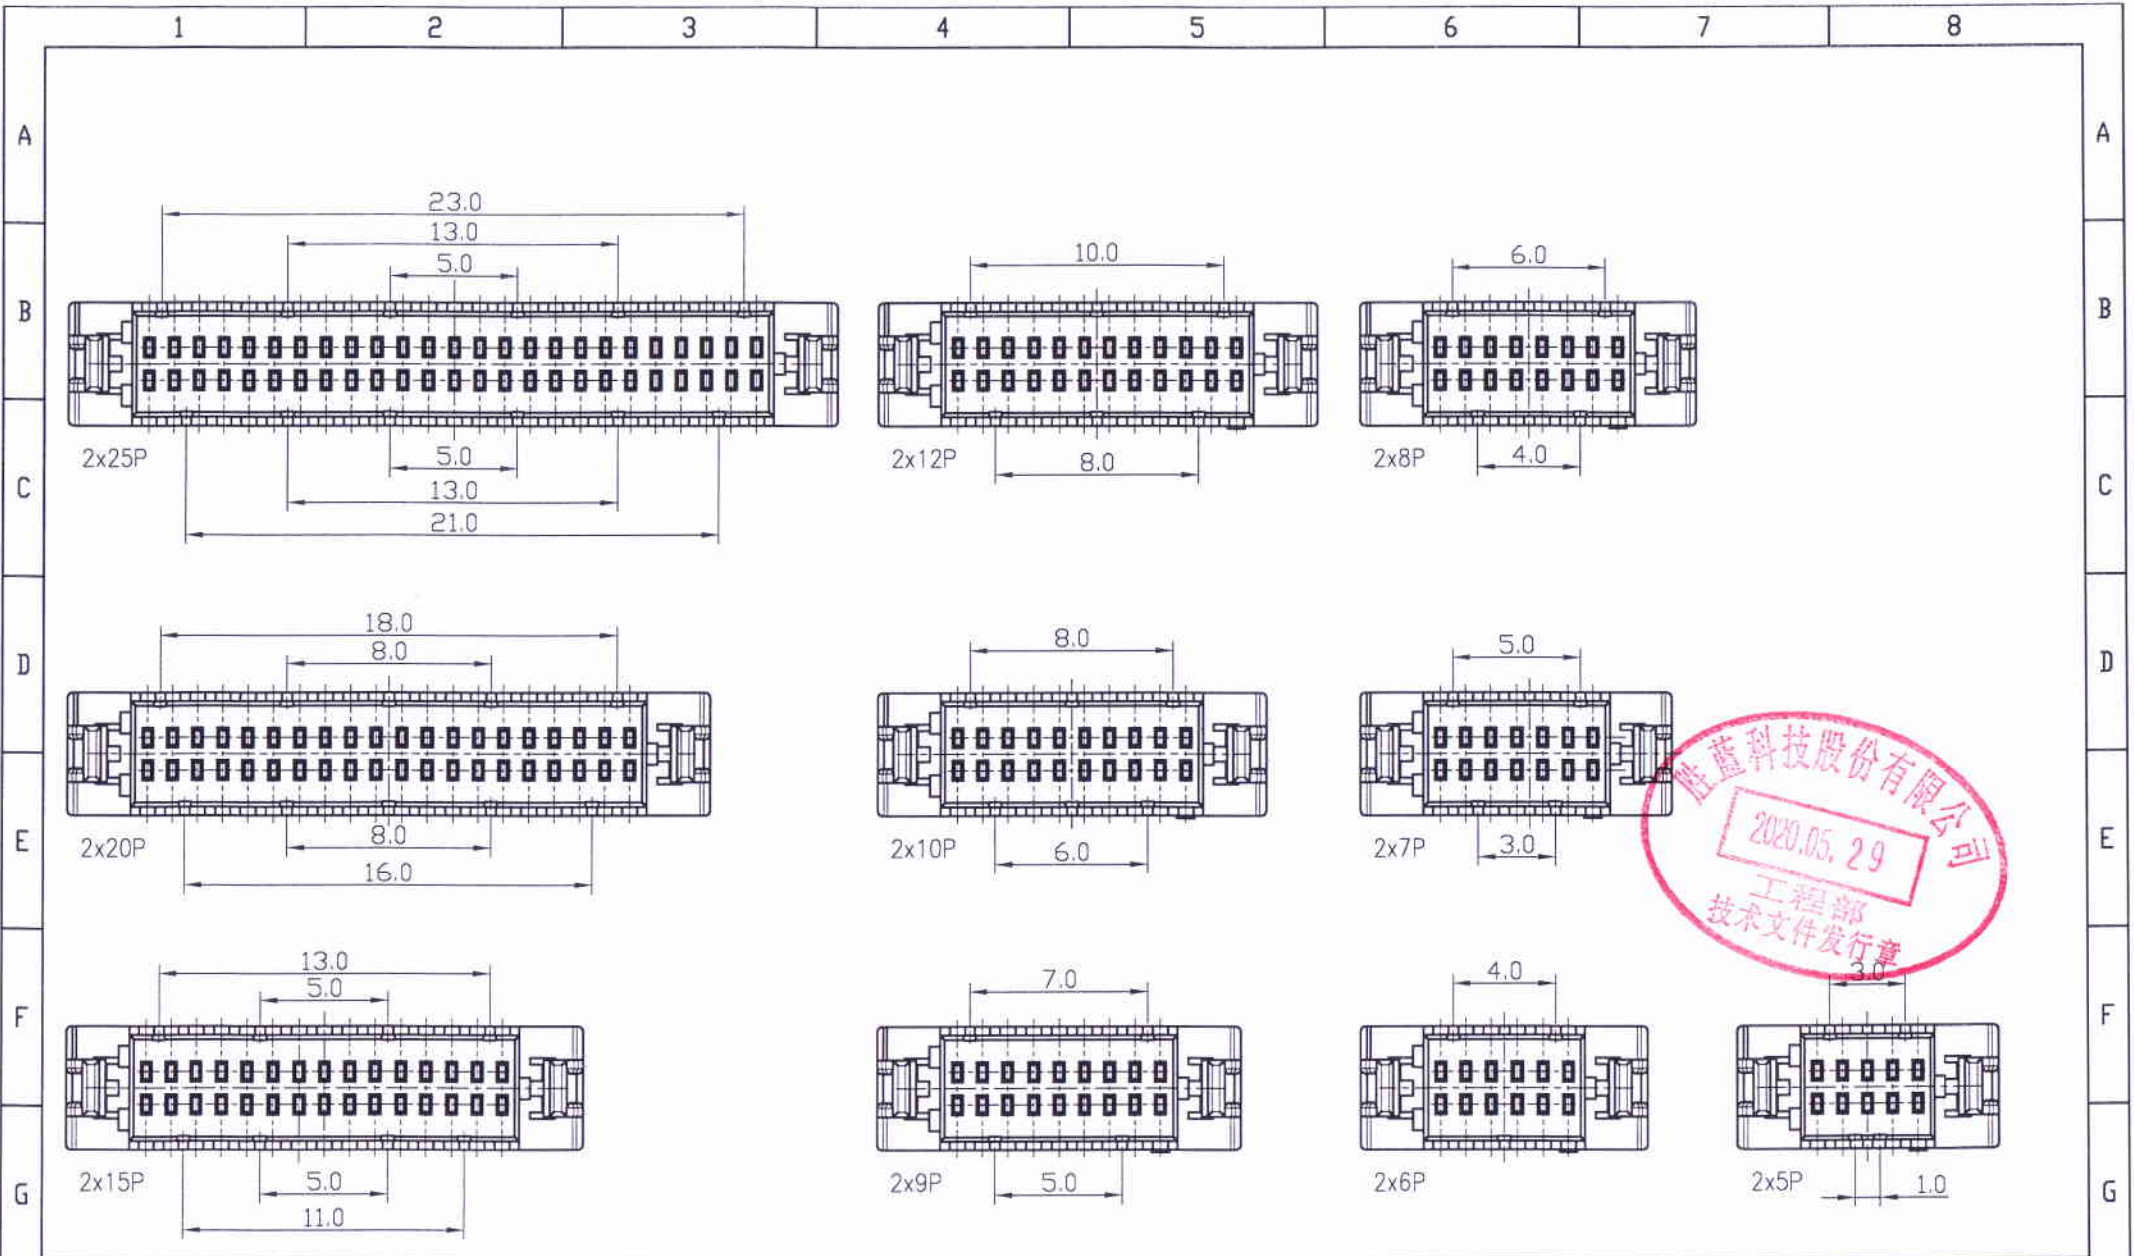

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 JCTC ® TERMINAL&CONNECTORS
A0	新图面发行	20.05.26		LINEAR	ANGLES	APPROVED	<i>[Signature]</i>		11002H00-2XNPX-L1-HF-XX	ENDE05	
			UNIT: MM	0.0 ± 0.15	X° ± 3°	DESIGNER	<i>[Signature]</i>	20.05.26	TITLE: JST 1.00mm PITCH HOUSING 双排带扣		REV: A0
			SIZE: A4	0.00 ± 0.08	X° X' ± 2°	DRAWN	伍文聪	20.05.26			SHEET: 2/2