


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H





A
B
C
D
E
F
G
H

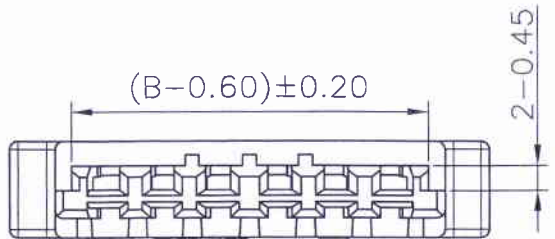



11006H00-NP-HF
① ② ③ ④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ HF : Halogen Free

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

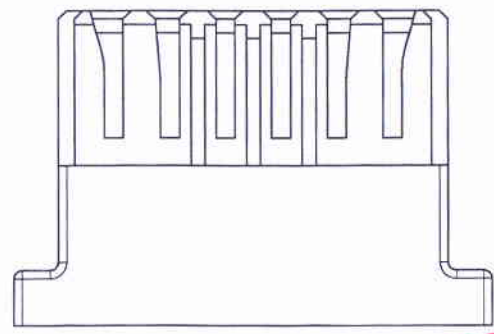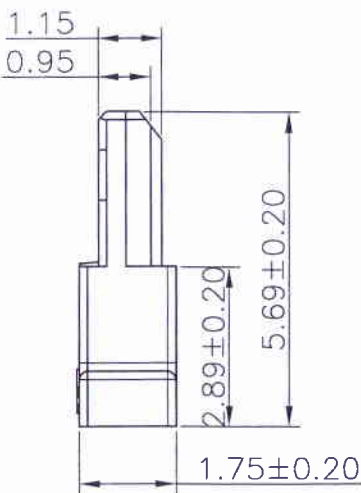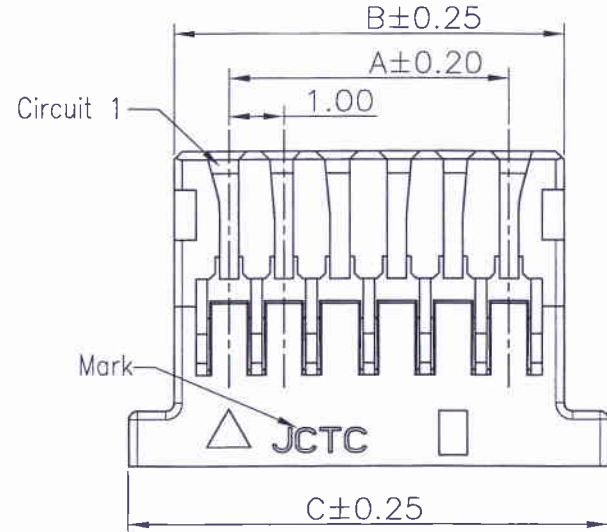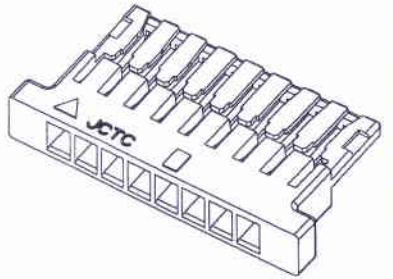

Circuit No.	Dimensions		
	A	B	C
2P	1.00	3.00	4.60
3P	2.00	4.00	5.60
4P	3.00	5.00	6.60
5P	4.00	6.00	7.60
6P	5.00	7.00	8.60
7P	6.00	8.00	9.60
8P	7.00	9.00	10.60
9P	8.00	10.00	11.60
10P	9.00	11.00	12.60
11P	10.00	12.00	13.60
12P	11.00	13.00	14.60
13P	12.00	14.00	15.60
14P	13.00	15.00	16.60
15P	14.00	16.00	17.60
16P	15.00	17.00	18.60

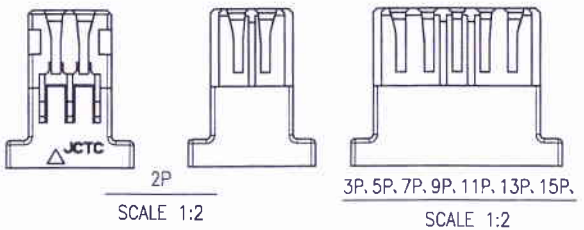

Suitable for JCTC 11006 series terminal

Part No.	Material	Color
11006H00-NP-HF	Nylon66,UL94V-0	White

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	 JCTC [®] TERMINAL&CONNECTORS	
C0	换图框发行	12.02.04	LINEAR	1:1			11006H00-NP-HF	ENDE05		
C1	变更公司名称	17.03.27	0.0±0.25	APPROVED	张振坤	20.05.28				
C2	HN2005280103	20.05.28	0.00±0.15	DESIGNER	张振坤	20.05.28	TITLE:			
			0.000±0.08	DRAWN	张振坤	20.05.28	SHL 1.00mm PITCH HOUSING			
									REV: C2	SHEET: 1/1

1 2 3 4 5 6 7 8