
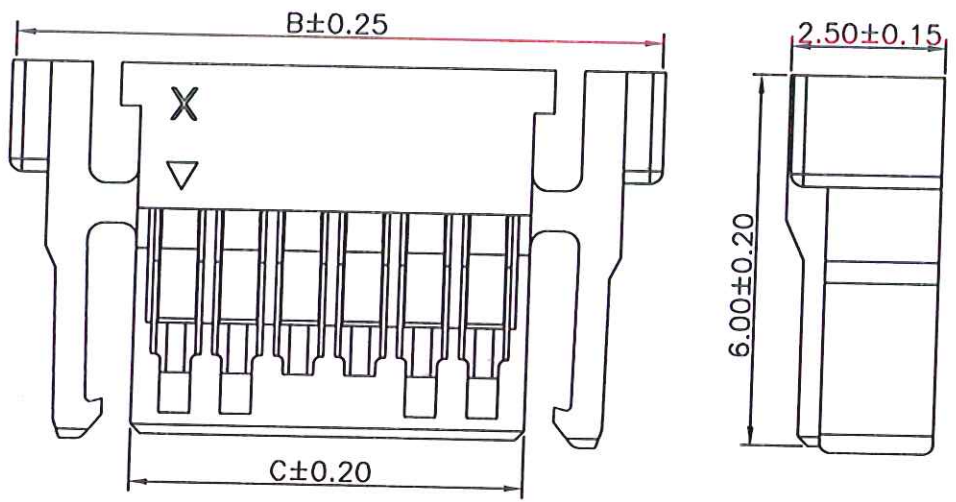


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

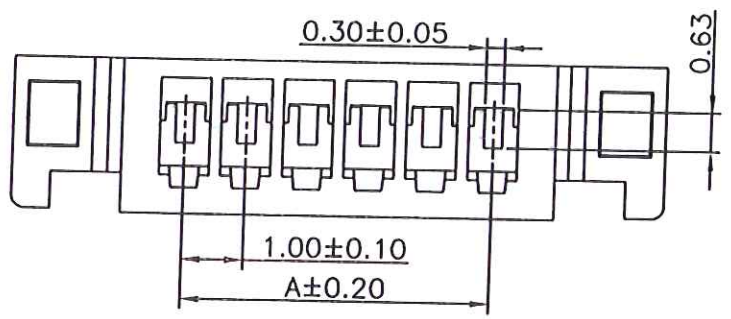

Specifications:  
 Rated Voltage : 50V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

11008H00-NP-L-S1-HF  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② 90 : Side Contact  
00 : Up Contact
- ③ No. of Circuits
- ④ L: Lock Type
- ⑤ S1: S1 TYPE
- ⑥ HF: Halogen Free

PART NO.	Dimensions		
	A	B	C
2P	--	6.60	2.40
3P	2.00	7.60	3.40
4P	3.00	8.60	4.40
5P	4.00	9.60	5.40
6P	5.00	10.60	6.40
7P	6.00	11.60	7.40
8P	7.00	12.60	8.40
9P	8.00	13.60	9.40
10P	9.00	14.60	10.40
11P	10.00	15.60	11.40
12P	11.00	16.60	12.40
13P	12.00	17.60	13.40
14P	13.00	18.60	14.40
15P	14.00	19.60	15.40
16P	15.00	20.60	16.40
17P	16.00	21.60	17.40
18P	17.00	22.60	18.40
19P	18.00	23.60	19.40
20P	19.00	24.60	20.40



Part No.	Material	Color
11008H00-NP-L-S1-HF	Nylon66,UL 94V-0	White

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
A0	新版发行	17.03.20		LINEAR	ANGLES	APPROVED		
A1	HR2011160328	20.11.16	0.00±0.20	X° REF±6°	DESIGNER	20.11.16		
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	伍文聪	20.11.16

PART NO: 11008H00-NP-L-S1-HF  
 DWG. NO: ENDE05

**JCTC**<sup>®</sup>  
 TERMINAL&CONNECTORS

TITLE: 1.0mm PITCH Housing 两边带扣

REV: A1 SHEET: 1/1

1 2 3 4 5 6 7 8