

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A

B

C




D

E


F

G


H

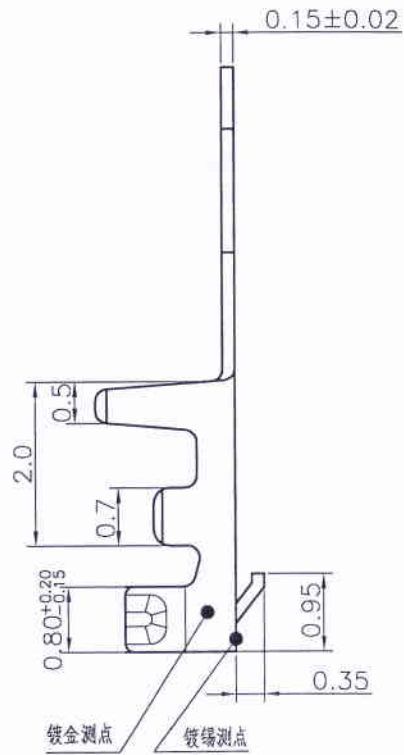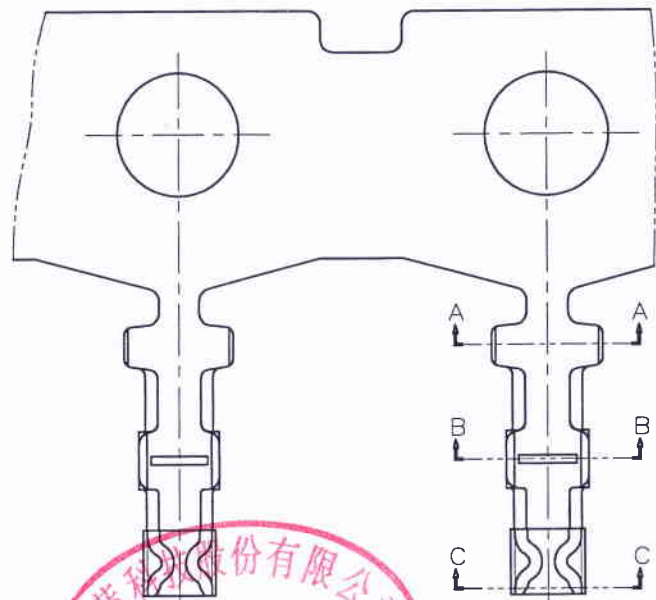

Section A-A



Section B-B



Section C-C

Note: 11251TOP-XX-D-NK

NK: 无印字

Finish 表示: D TYPE

- 5A--Gold flash
- 5B--2u"
- 5C--3u"
- 5D--4u"
- 5E--5u"
- 5F--10u"
- 5G--15u"
- 5H--30u"
- 5I--50u"
- 2E--Tin-plated

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
11251TOP-2E-D-NK	AWG#28~#32	1.00mm(Max)	Phosphor Bronze	Ni 30u"Min Tin 100u"Min	15,000pcs
11251TOP-5X-D-NK	AWG#28~#32	1.00mm(Max)	Phosphor Bronze	Gold-plated overall	15,000pcs



REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: M4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:		
					LINEAR	ANGLES					11251TOP-XX-D-NK		
C0	新图面发行	13.11.26			0.0±0.25	X° RBF±6°	APPROVED	[Signature]	2018.07.19		DWG. NO:		
C1	新增电镀规格	16.11.07			0.00±0.15		X° ±3°	DESIGNER	[Signature]		18.07.19	ENDE05	
C2	更换公司名称	16.12.26			0.00±0.08		X° X'±2°	DRAWN	黄小锋		18.07.19	REV: C3 SHEET: 1/1	
C3	依TN1807190131新增电镀规格	18.07.19										TITLE: MX1.25 端子	

1

2

3

4

5

6

7

8