





RoHS

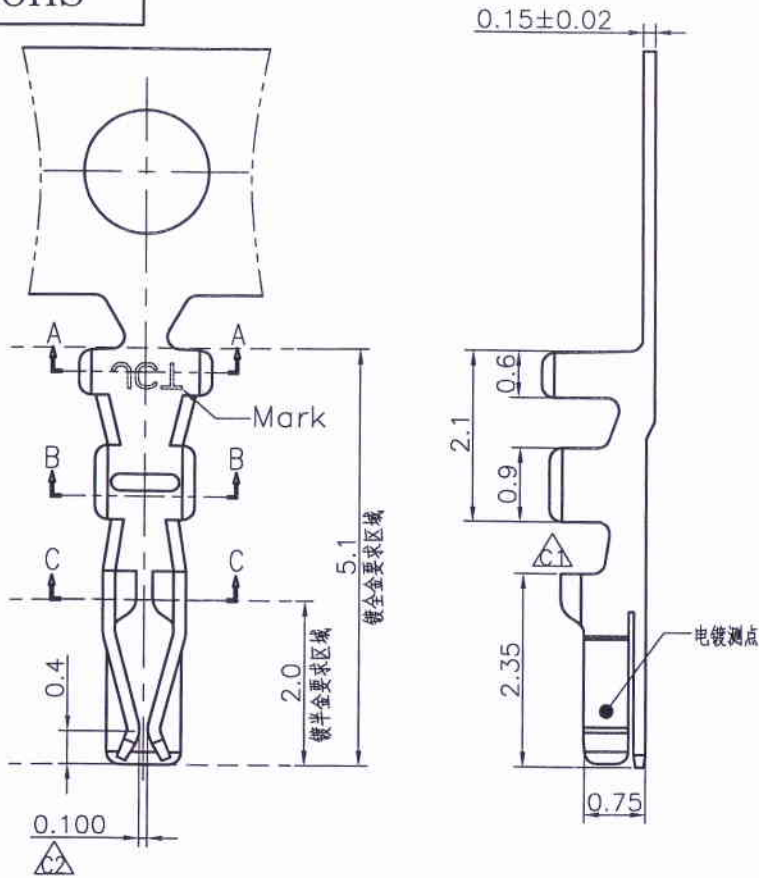

SECTION A-A



SECTION B-B



SECTION C-C



Note: 11256TOP-XX-XX

Finish	5A--Gold-flash	5B--2u"	5C--3u"	空码:Mark
	5D--4u"	5E--5u"	5F--10u"	NK:NO Mark
	5G--15u"	5H--30u"	5I--50u"	
	0A--Gold-flash	0B--2u"	0C--3u"	
	0D--4u"	0E--5u"	0F--10u"	
	0G--15u"	0H--30u"	0I--50u"	

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11256TOP-2E-XX	AWG#28 ~ #32	1.00mm(max)	Phosphor Bronze	Tin-plated	20,000 pcs
11256TOP-0X-XX	AWG#28 ~ #32	1.00mm(max)	Phosphor Bronze	Gold-plated contact area	20,000 pcs
11256TOP-5X-XX	AWG#28 ~ #32	1.00mm(max)	Phosphor Bronze	Gold-plated overall	20,000 pcs

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
C2	ECN1010110092	10. 10. 11	LINEAR	1:1				
C3	TR1105310082	11. 05. 31	0.0±0.25	APPROVED		11/5/17		DWG. NO:
C4	TR1106140092	11. 06. 14	0.00±0.15	DESIGNER	邓群庄	17.03.01		ENDE05
C5	更换公司名称	17. 03. 01	0.000±0.08	DRAWN	邓群庄	17. 03. 01		REV: C5 SHEET: 1/1
			X° REF±6°				TITLE:	
			X° ±3°				FI-S 端子	
			X° X'±2°					