


RoHS

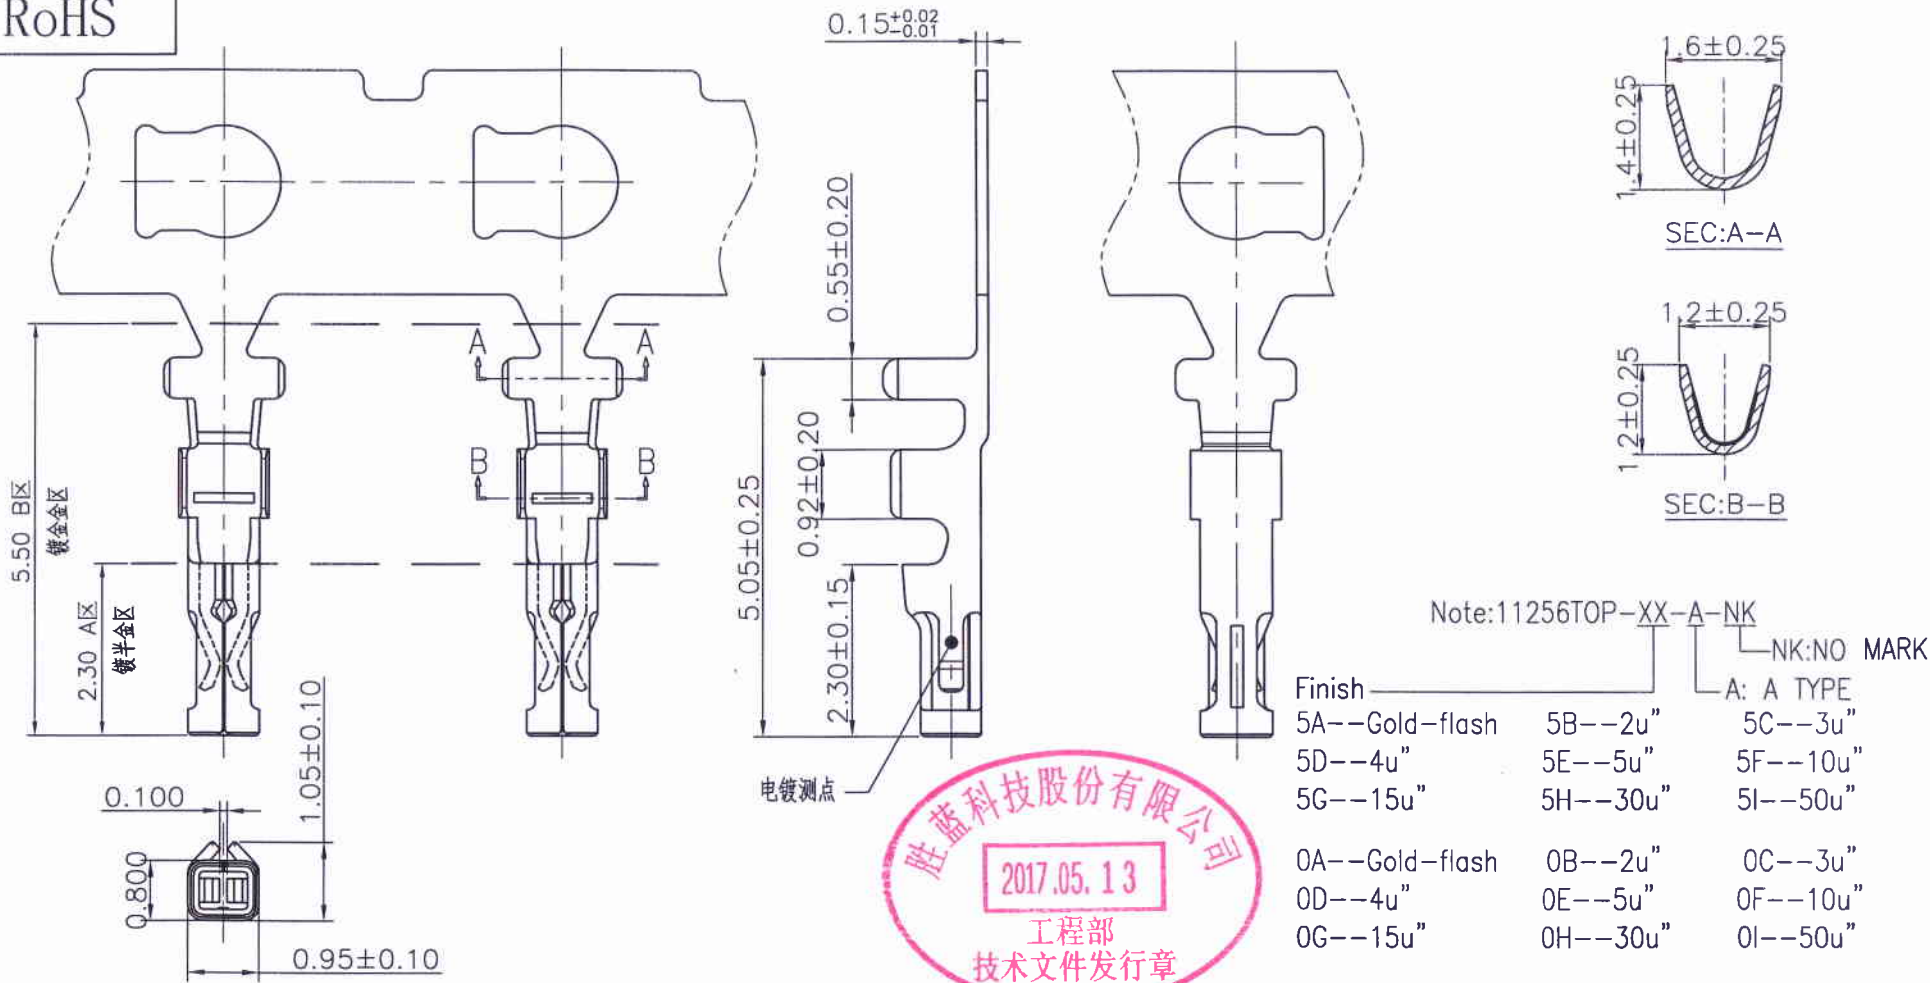

Note: 11256TOP-XX-A-NK

NK: NO MARK

A: A TYPE

5A--Gold-flash	5B--2u"	5C--3u"
5D--4u"	5E--5u"	5F--10u"
5G--15u"	5H--30u"	5I--50u"
0A--Gold-flash	0B--2u"	0C--3u"
0D--4u"	0E--5u"	0F--10u"
0G--15u"	0H--30u"	0I--50u"

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11256TOP-2E-A-NK	AWG#28~#32	1.00mm(max)	Phosphor Bronze	Tin-plated	20,000 pcs
11256TOP-0X-A-NK	AWG#28~#32	1.00mm(max)	Phosphor Bronze	Gold-plated contact area	20,000 pcs
11256TOP-5X-A-NK	AWG#28~#32	1.00mm(max)	Phosphor Bronze	Gold-plated overall	20,000 pcs

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO: 11256TOP-XX-A-NK
C0	换图框发行	11.09.06	LINEAR	1:1	APPROVED		
C1	更换公司名称	17.03.30	0.0±0.25	X° REF±6°	DESIGNER		
			UNIT: MM	0.00±0.15	X° ±3°		DWG. NO: ENDE05
			SIZE: M4	0.000±0.08	X° X'±2°		REV: C1 SHEET: 1/1

JCTC® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
TITLE: FI-S 端子