


Specifications:
 Voltage Rating : 50V AC/DC
 Current Rating : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Contact: Phosphor Bronze/Matte Tin-plated
 Solder Tabs: Brass/Matte Tin-plated
 Insulator and Cap : Thermal Plasticity Resin,
 UL 94V-0 Halogen Free
 Colour : Natural(Beige)
 The product using material and processing
 must conform to the "WI-PZ-142"HSF
 technical standard control requirements

Circuits	Dimensions		
	A	B	C
2P	--	5.75	2.05
3P	2.50	7.00	3.30
4P	3.75	8.25	4.50
5P	5.00	9.50	6.70
6P	6.25	10.75	8.65
7P	7.50	12.00	
8P	8.75	13.25	
9P	10.00	14.50	
10P	11.25	15.75	
11P	12.50	17.00	
12P	13.75	18.25	
13P	15.00	19.50	
14P	16.25	20.75	
15P	17.50	22.00	
16P	18.75	23.25	
17P	20.00	24.50	
18P	21.25	25.75	

- 11257W00-NP-S-3E-HF-R
 ① ② ③ ④ ⑤ ⑥ ⑦
- ① Series No.
 - ② W90 : Side Contact
W00 : Up Contact
 - ③ No. of Circuits
 - ④ S : SMT Type
 - ⑤ 3E : Matte Tin-plated
 - ⑥ HF : Halogen Free
 - ⑦ R : Reel pack



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	JCTC® TERMINAL&CONNECTORS
C0	新图面发行	13.07.25	LINEAR	1:1			11257W00-NP-S-3E-HF	ENDE05	
C1	更换公司名称	17.05.04	ANGLES	APPROVED					
C2	WN2009240266	20.09.28	0.0±0.25 X° REF±6°	DESIGNER			TITLE:		
			UNIT: MM 0.00±0.15 X° ±3°	DRAWN	李占梅	20.09.28	GHR 1.25mm PITCH 180° SMT WAFER	REV: C2	
			SIZE: A4 0.000±0.08 X° X'±2°					SHEET: 1/2	

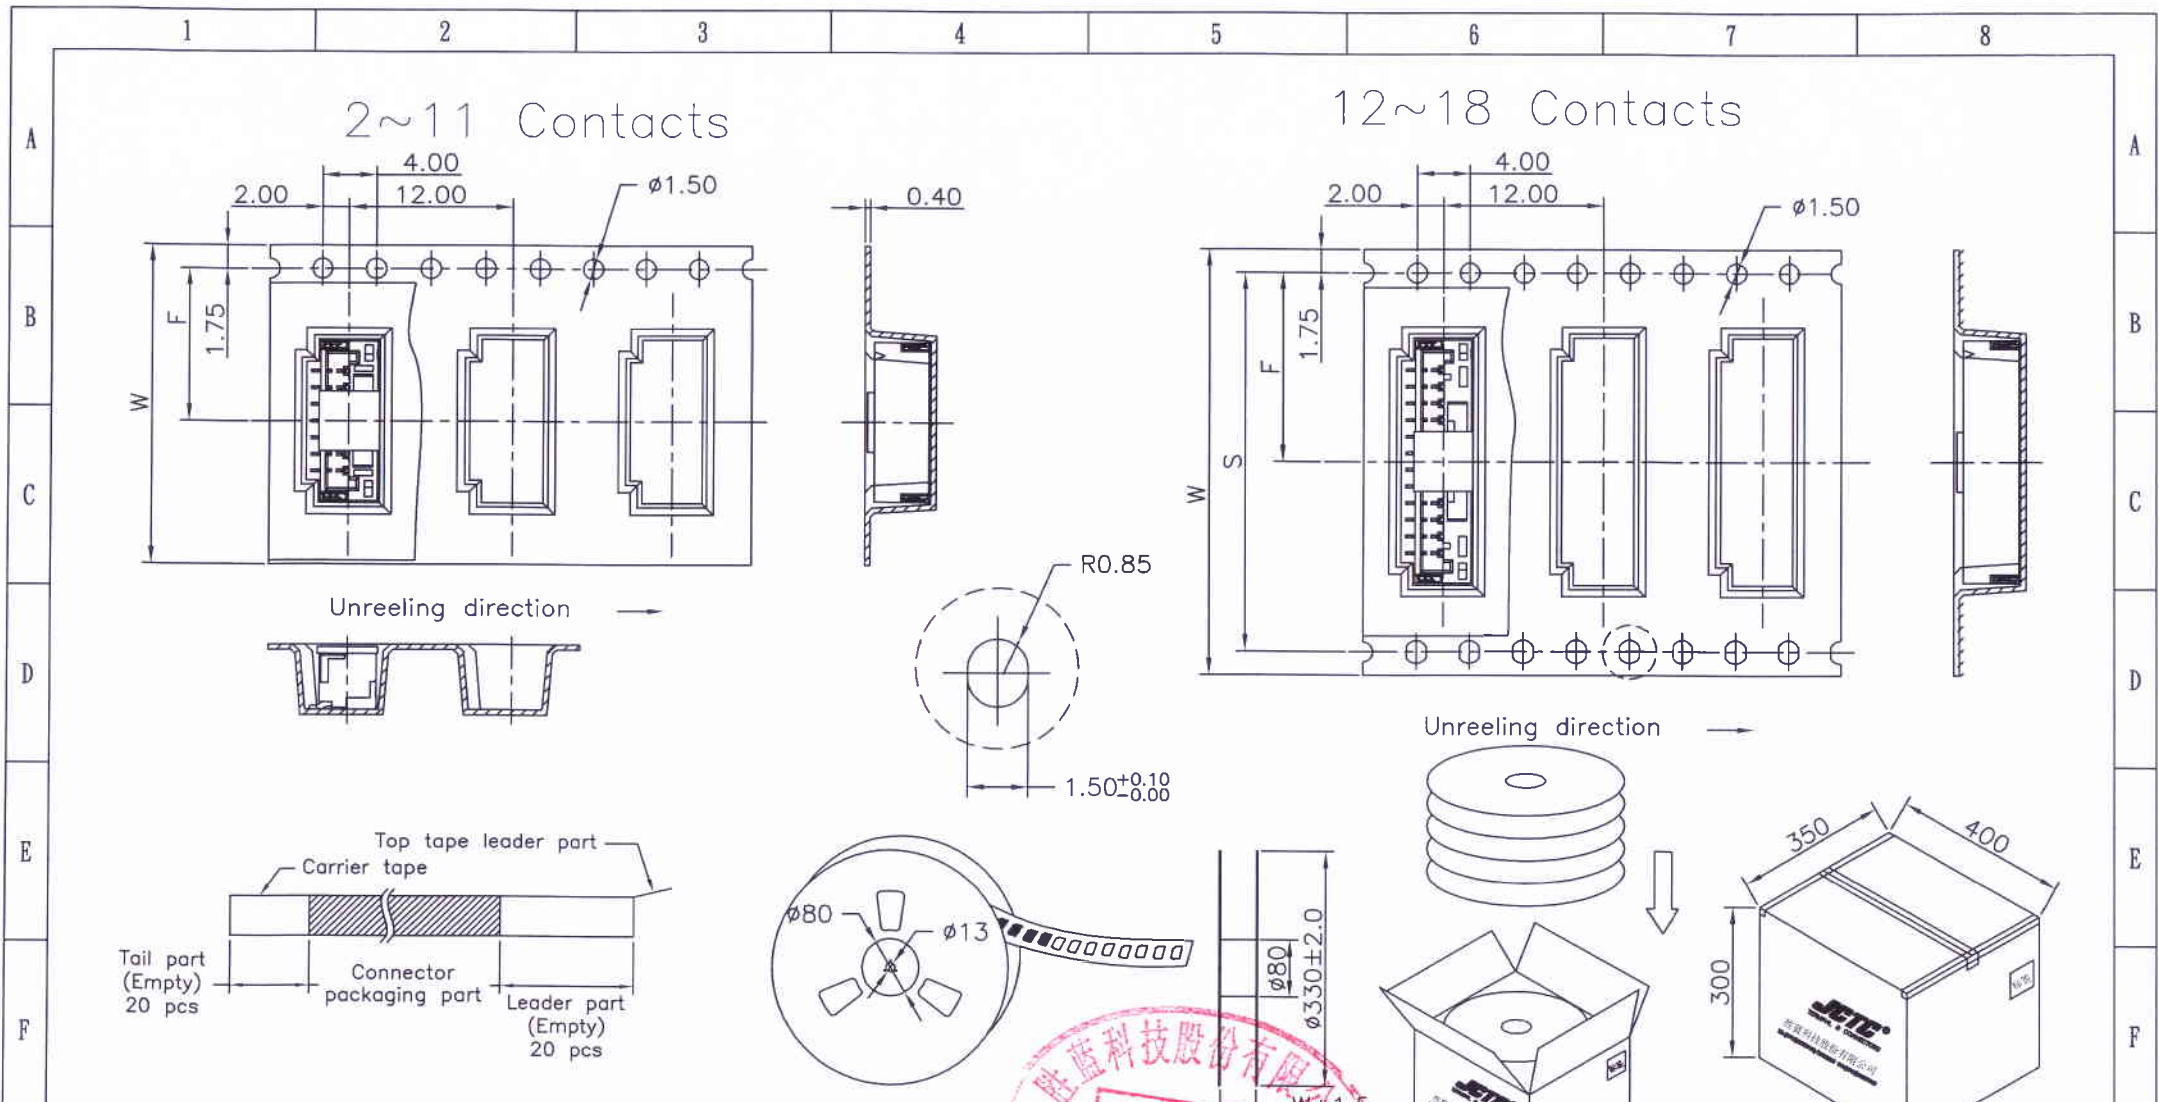

Number of Contacts	W±0.3	F±0.1	S±0.1	pcs/Reel	pcs/Box
2~5P	16	7.50	/	1,000	14,000
6~11P	24	11.50		1,000	10,000
12~16P	32	14.20	28.40	1,000	8,000
17~18P	44	22.20	40.40	1,000	6,000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	 JCTC ® TERMINAL&CONNECTORS
C0	新图面发行	13.07.25		LINEAR	1:1		20.09.28	11257W00-NP-S-3E-HF	ENDE05	
C1	更换公司名称	17.05.04		0.0±0.25	ANGLES					
C2	WN2009240266	20.09.28	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	李占梅	TITLE:	GHR 1.25mm PITCH 180° SMT WAFER	
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	李占梅			

REV: C2 SHEET: 2/2