


SPECIFICATIONS:

1. Material And Finish:
 - Insulator: PA66 UL94 V-0 .
2. Electrical Specification:
 - Contact Resistance: 40m Ohms Max.
 - Insulation Resistance: 1000M Ohms Min.
 - Withstanding Voltage: 500V AC /Minute
 - Voltage Rating: 150V AC/DC.
 - Current Rating: 3A AC/DC Per Pin(AWG 24#).
3. The Product Using Material And Processing Must Conform To The "WI-PZ-142" HSF Technical Standard Control Requirements.

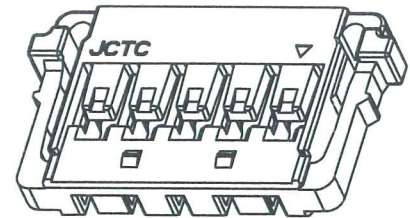

11505 XXX-NP X-L-XX
① ② ③ ④

- ① H90: Side Contact
- H00: Up Contact
- ② No. of Circuits
- ③ Product color
- A: Black type
- Without: Nature
- ④ HF: Halogen Free

PART NO.	Dimensions				
	A	B	C	D	F
2P	6.95	1.5	6.15	5.55	3.25
3P	8.45	3.0	7.65	7.05	4.75
4P	9.95	4.5	9.15	8.55	6.25
5P	11.45	6.0	10.65	10.05	7.75
6P	12.95	7.5	12.15	11.55	9.25
7P	14.45	9.0	13.65	13.05	10.75
8P	15.95	10.5	15.15	14.55	12.25
9P	17.45	12.0	16.65	16.05	13.75
10P	18.95	13.5	18.15	17.55	15.25
11P	20.45	15.0	19.65	19.05	16.75
12P	21.95	16.5	21.15	20.55	18.25



Part No.	Material	Color
11505H00-NPA-L-HF	Nylon66,UL94V-0	BLACK
11505H00-NP-L-HF	Nylon66,UL94V-0	NATURAL

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
AO	新图纸发行	2021.7.30		LINEAR	ANGLES	1:1					
A1	增加尺寸	2021.9.7	0.0±0.25	X° REF±6°	APPROVED	<i>Nelson</i>	21.09.07	11505H00-NPX-L-HF	ENDE05		
			0.00±0.15	X° ±3°	DESIGNER	<i>WU</i>	21.09.07	TITLE			
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	HZJ	2021.9.7	1.5 Pitch Housing 单排带扣		