
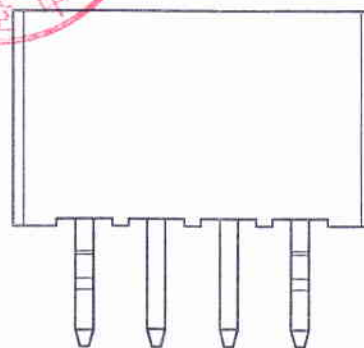
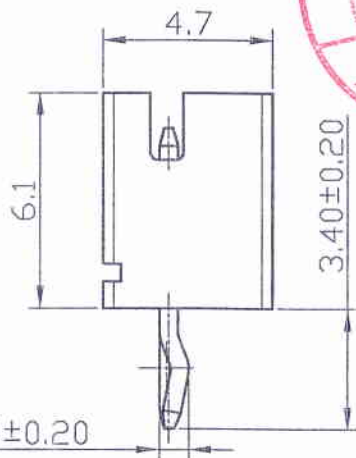
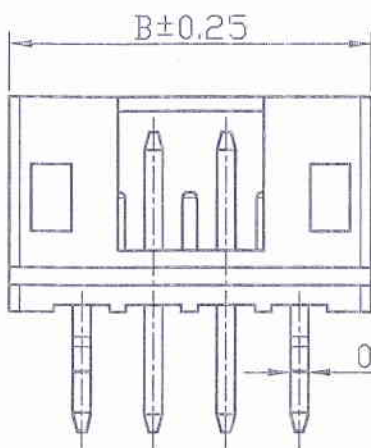



Specifications:

Rated Voltage : 100V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



PART NO.	Dimensions	
	A	B
2P	---	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

12001W00-NPX-HF
 ① ② ③ ④ ⑤

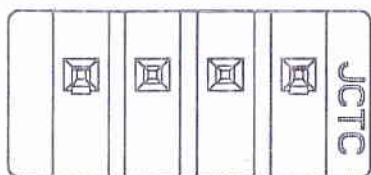

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
- ⑤ S1 : S1 Type
- ⑥ HF : Halogen Free

Part No.	Material	Color	PIN Material
12001W00-NP-S1-HF	HTN,UL94V-0	Natural(Beige)	Barss/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
A0	新图面发行	18.09.20	LINEAR	ANGLES	1:1		
			0.0±0.25	X° REF±6°	APPROVED	[Signature]	10/5/19
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	[Signature]
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪 18.09.20

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: 2.00mm PITCH DIP TYPE 180° WAFER

PART NO:	12001W00-NPX-S1-HF	
DWG NO:	ENDE05	
REV:	A0	SHEET: 1/1