
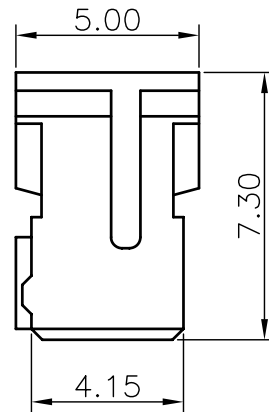
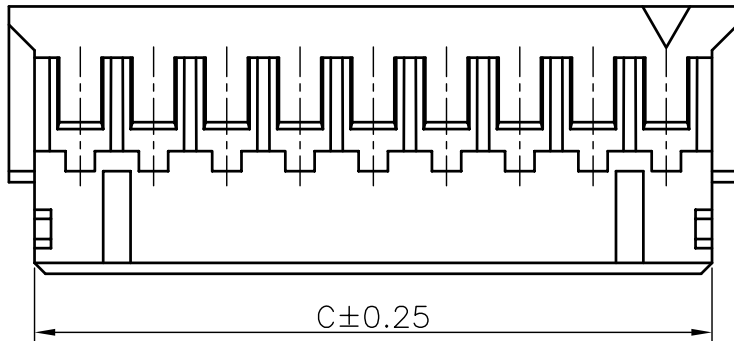


环保物料

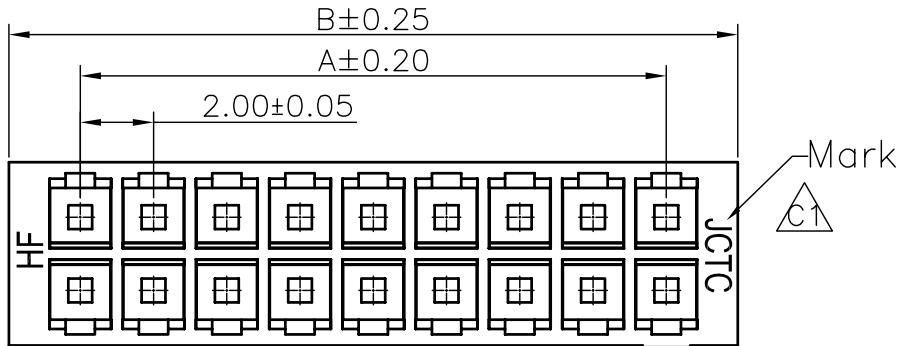

Dimensional Ordering Information:			
Circuits No.	Dimensions		
	A	B	C
2x 2P	2.00	5.90	4.50
2x 3P	4.00	7.90	6.50
2x 4P	6.00	9.90	8.50
2x 5P	8.00	11.90	10.50
2x 6P	10.00	13.90	12.50
2x 7P	12.00	15.90	14.50
2x 8P	14.00	17.90	16.50
2x 9P	16.00	19.90	18.50
2x10P	18.00	21.90	20.50
2x11P	20.00	23.90	22.50
2x12P	22.00	25.90	24.50
2x13P	24.00	27.90	26.50
2x14P	26.00	29.90	28.50
2x15P	28.00	31.90	30.50
2x16P	30.00	33.90	32.50
2x17P	32.00	35.90	34.50
2x18P	34.00	37.90	36.50
2x19P	36.00	39.90	38.50
2x20P	38.00	41.90	40.50

Specifications:

Rated Voltage : 200V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 650V AC/minute
 Contact Resistance : 25mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

12002H00-2xNPX-HF

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ HF : Halogen Free

Suitable for JCTC 12002 series terminal

Part No.	Material	Color
12002H00-2xNP	Nylon 66,UL94V-0	本色
12002H00-2xNP-HF	Nylon 66,UL94V-0	无卤材料
12002H00-2xNPA	Nylon 66,UL94V-0	黑色
12002H00-2xNPE	Nylon 66,UL94V-0	黄色
12002H00-2xNPG	Nylon 66,UL94V-0	蓝色

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
C1	10.09.16	实物与图面不符, 修改图面	龚友连	王志刚
C0	09.11.25	换图框发行	龚友连	王志刚

一般公差 GENERAL TOLERANCE	
X.X ±0.25	X' ±5'
X.XX ±0.15	X.X' ±2'
X.XXX ±0.08	▲ MAJOR DIM.
单位 UNIT	mm

绘图 DR.	陈干
校对 CHK.	龚友连
审核 CHK.	龚友连
核准 APPD.	王志刚

JCTC 东莞市胜蓝电子有限公司
 —— 富强电子厂 ——

品名 TITLE
 PHD 双排 2.0mm PITCH HOUSING

料号 PART NO.	12002H00-2xNPX-XX	
文件编号 NUMBER	ENDE05	
比例 SCALE	SHEET	版次 REV.
1/1	1/1	C1