

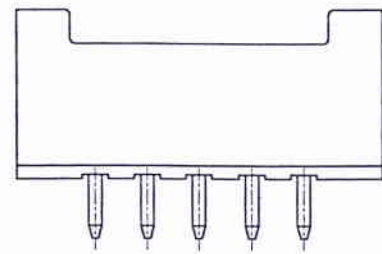



Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(Max.)
 Insulation Resistance : 1000MΩ(Min.)
 Temperature Range : -25°C~+85°C
 Contact: Brass/Matte Tin
 Insulator: HTN,UL94V-0/Halogen Free
 Color: Natural(Beige)
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

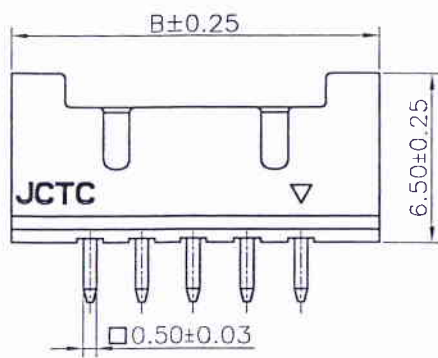

Circuits	Dimensions		
	A	B	C
2x2P	--	8.00	4.70
2x3P	4.00	10.00	6.70
2x4P	6.00	12.00	8.70
2x5P	8.00	14.00	10.70
2x6P	10.00	16.00	12.70
2x7P	12.00	18.00	14.70
2x8P	14.00	20.00	16.70
2x9P	16.00	22.00	18.70
2x10P	18.00	24.00	20.70
2x11P	20.00	26.00	22.70
2x12P	22.00	28.00	24.70
2x13P	24.00	30.00	26.70
2x14P	26.00	32.00	28.70
2x15P	28.00	34.00	30.70
2x16P	30.00	36.00	32.70
2x17P	32.00	38.00	34.70
2x18P	34.00	40.00	36.70
2x19P	36.00	42.00	38.70
2x20P	38.00	44.00	40.70
2x21P	40.00	46.00	42.70
2x22P	42.00	48.00	44.70

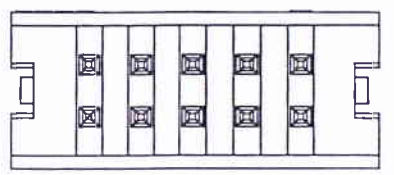

12002W00-2xNP-L-S1-23-HF
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② W00 : Up Contact
- ③ No. of Circuits
- ④ L: Lock Type
- ⑤ S1: S1 TYPE
- ⑥ DIM A=2.30mm
- ⑦ HF: Halogen Free

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:
AO	新图面发行	17.11.23	LINEAR	1:1			
			ANGLES	APPROVED			BWG. NO:
			0.0±0.25	DESIGNER	伍文聪	17.11.23	ENDE05
			X° REF±6°	DRAWN	伍文聪	17.11.23	REV: AO SHEET: 1/1
			UNIT: MM				
			0.00±0.15				
			X° ±3°				
			SIZE: A4				
			0.000±0.08				
			X° X'±2°				

JCTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: 2.00mm PITCH DUAL ROW DIP TYPE
 180° WAFER -- LOCK TYPE