

Circuits Part No	Dimensions		
	A	B	C
2P	--	8.00	0.78
3P	4.00	10.00	1.20
4P	6.00	12.00	1.50
5P	8.00	14.00	1.50
6P	10.00	16.00	1.50
7P	12.00	18.00	1.50
8P	14.00	20.00	1.50
9P	16.00	22.00	1.50
10P	18.00	24.00	7.60
11P	20.00	26.00	7.60
12P	22.00	28.00	7.60

12002W00-NP-SA-NK-R


- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT TYPE
- ⑤ A : A TYPE
- ⑥ NK : No Mark
- ⑦ R : Tape & Reel(With Cap)

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



No.	Description	Material	Color
a	Insulator	High temperature plastic,UL94V-0	Natural(Beige)
b	PIN	Brass/Tin-plated	--
c	Solder Tabs	Brass/Tin-plated	--
d	Cap	Nylon 6T,UL94V-0	Natural(Beige)

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	15.12.16		LINEAR					
A1	更新公司名称	17.12.27		ANGLES					DWG. NO:
				0.0±0.25	X° REF±6°	APPROVED	18.08.14		ENDE05
				0.00±0.15	X° ±3°	DESIGNER			REV: A1
				0.000±0.08	X° X'±2°	DRAWN	伍文聪		SHEET: 1/2
								TITLE: PA 2.00mm PITCH 180° SMT WAFER	

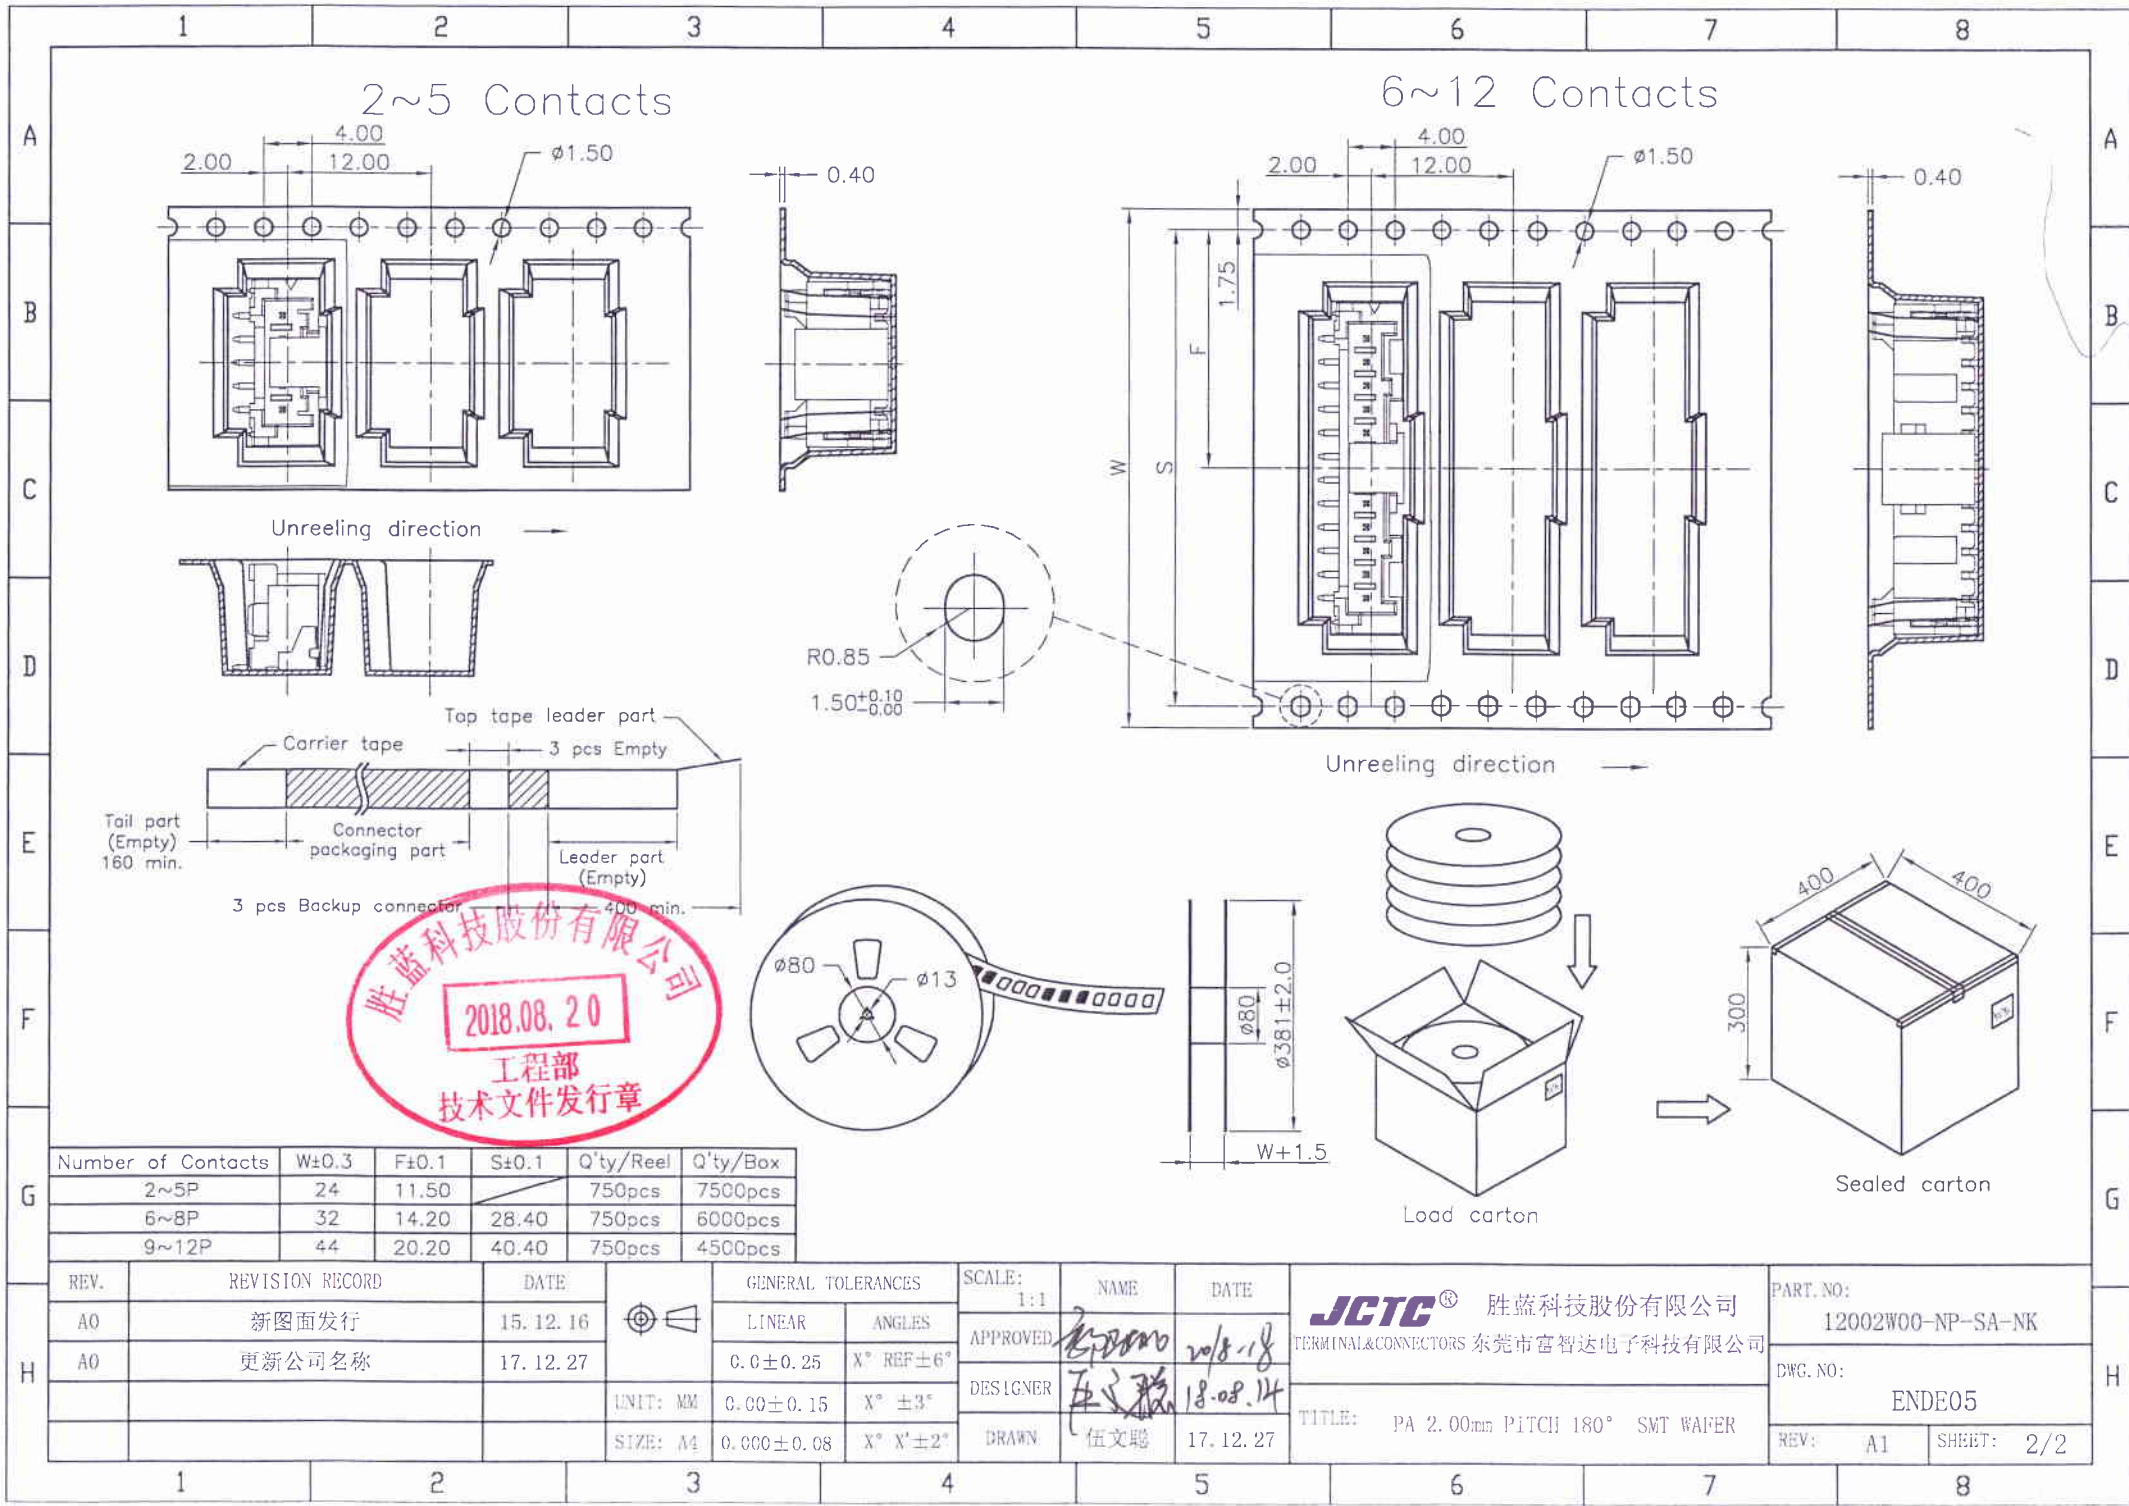

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Q'ty/Box
2~5P	24	11.50		750pcs	7500pcs
6~8P	32	14.20	28.40	750pcs	6000pcs
9~12P	44	20.20	40.40	750pcs	4500pcs

REV.	REVISION RECORD	DATE	
A0	新图面发行	15.12.16	
A0	更新公司名称	17.12.27	
			UNIT: MM
			SIZE: M

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED		2018.18
0.00±0.15	X° ±3°	DESIGNER		18.08.14
0.000±0.08	X° X'±2°	DRAWN	伍文聪	17.12.27

JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO: 12002W00-NP-SA-NK
TITLE: PA 2.00mm PITCH 180° SMT WAFER	DWG. NO: ENDE05
	REV: A1 SHEET: 2/2