


Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

12003H00-2xNPA-HF



① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)  
Blank : Natural type
- ⑤ HF : Halogen Free

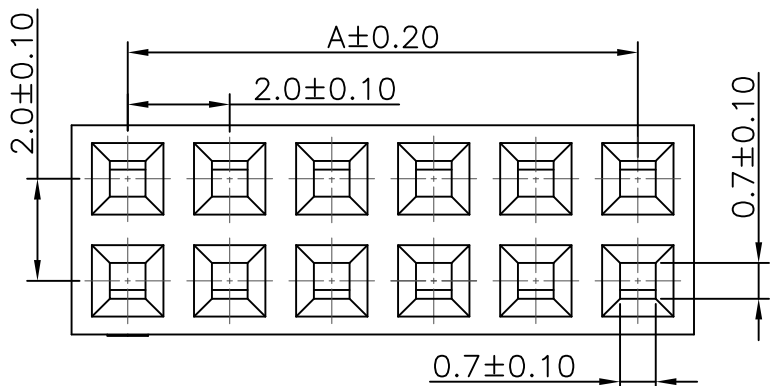

Dimensional Ordering Information:		2x12P	22.00	24.20
		2x13P	24.00	26.20
		2x14P	26.00	28.20
		2x15P	28.00	30.20
		2x16P	30.00	32.20
		2x17P	32.00	34.20
		2x18P	34.00	36.20
		2x19P	36.00	38.20
		2x20P	38.00	40.20
		2x21P	40.00	42.20
		2x22P	42.00	44.20
		2x23P	44.00	46.20
		2x24P	46.00	48.20
		2x25P	48.00	50.20

Circuits No.	Dimensions	
	A	B
2x2P	--	4.20
2x3P	4.00	6.20
2x4P	6.00	8.20
2x5P	8.00	10.20
2x6P	10.00	12.20
2x7P	12.00	14.20
2x8P	14.00	16.20
2x9P	16.00	18.20
2x10P	18.00	20.20
2x11P	20.00	22.20

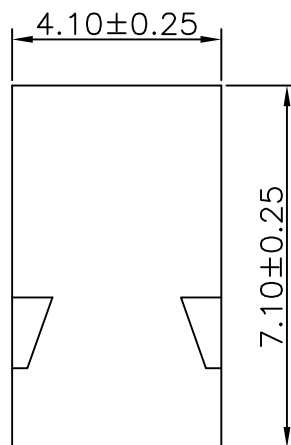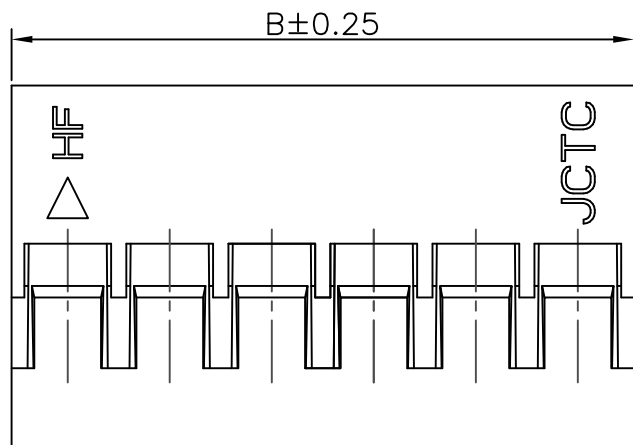

Suitable for JCTC 12003 series terminal

Part No.	Material	Color
12003H00-2xNPA	Nylon 66,UL94V-0	黑色
12003H00-2xNPA-HF	Nylon 66,UL94V-0	黑色无卤
12003H00-2xNPK-HF	Nylon 66,UL94V-0	白色无卤
12003H00-2xNPG-HF	Nylon 66,UL94V-0	蓝色无卤

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 12003H00-2xNPX	DWG. NO: ENDE05	 TERMINAL&CONNECTORS
C0	新图面发行	09.11.25		LINEAR	ANGLES	APPROVED					
C1	新增白色规格	15.01.23	0.0±0.25	X° REF±6°	DESIGNER						
C2	新增蓝色规格	15.08.31	0.00±0.15	X° ±3°	DRAWN	伍文聪	20.12.24	TITLE:	DB双排 2.0mm PITCH HOUSING		
C3	变更公司名称	20.12.24	SIZE: A4	0.000±0.08	X° X'±2°			REV: C3	SHEET: 1/1		