
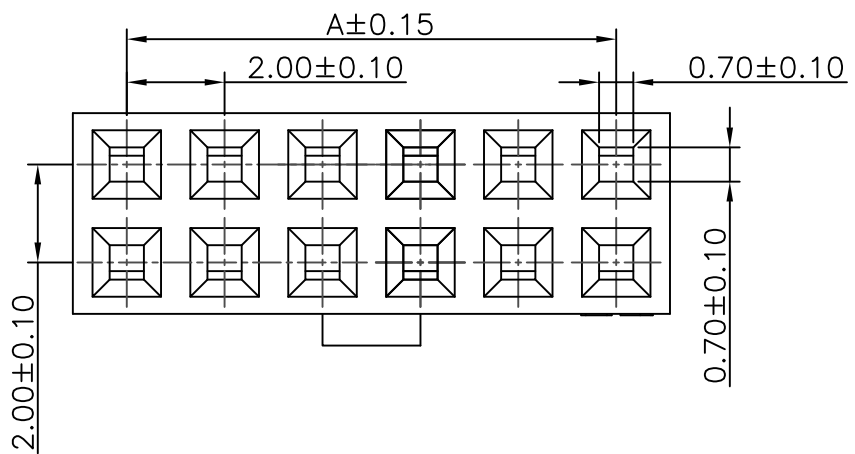




Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements




12003H00-2xNPA-I-S1

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank: Natural type
- ⑤ T : Mount type
- ⑥ S1 : S1 TYPE

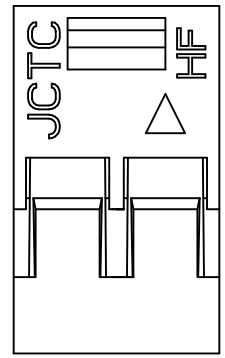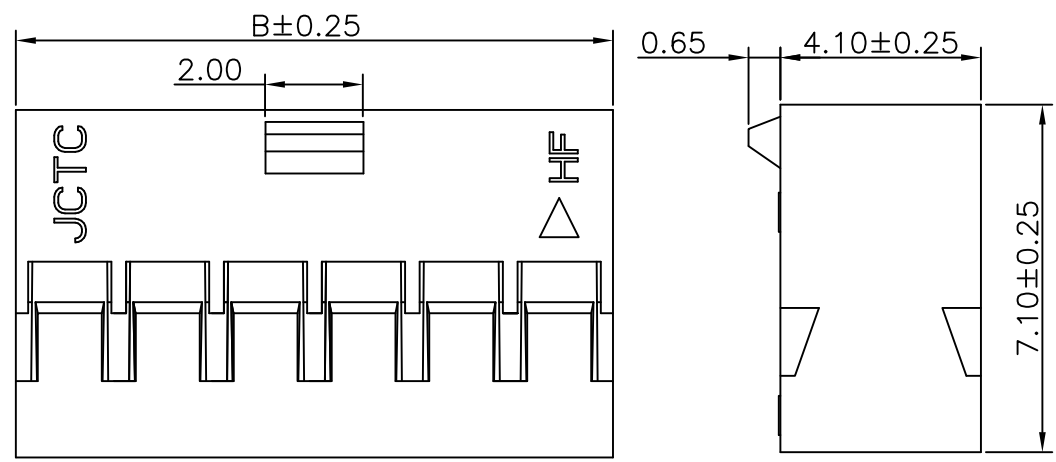


2x2P

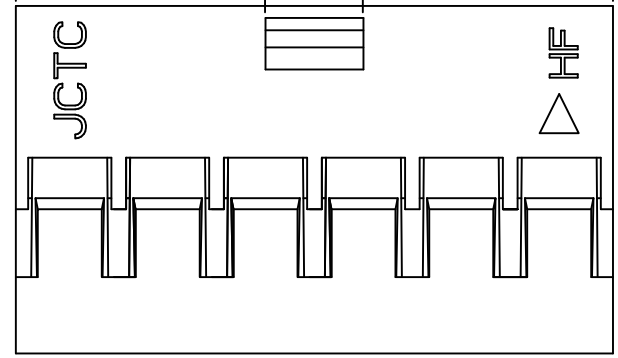

2x3P~2xNP

Circuits No.	Dimensions	
	A	B
2x2P	--	4.20
2x3P	4.00	6.20
2x4P	6.00	8.20
2x5P	8.00	10.20
2x6P	10.00	12.20



Suitable for JCTC 12003 series terminal

Part No.	Material	Color
12003H00-2XNPA-T-S1	Nylon66,UL 94V-0	Black

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 12003H00-2XNPA-T-S1	DWG. NO: ENDE05	 TERMINAL&CONNECTORS	
C0	新图面发行	14. 05. 04		LINEAR	ANGLES	APPROVED						
C1	新增2X5P规格	17. 08. 16	0. 0±0. 25	X° REF±6°	DESIGNER							
C2	整理图纸	20. 12. 24	0. 00±0. 15	X° ±3°	DRAWN	伍文聪	20. 12. 24	TITLE: DB 双排2.0mm PITCH HOUSING				
			SIZE: A4	0. 000±0. 08	X° X'±2°						REV: C2	SHEET: 1/1