

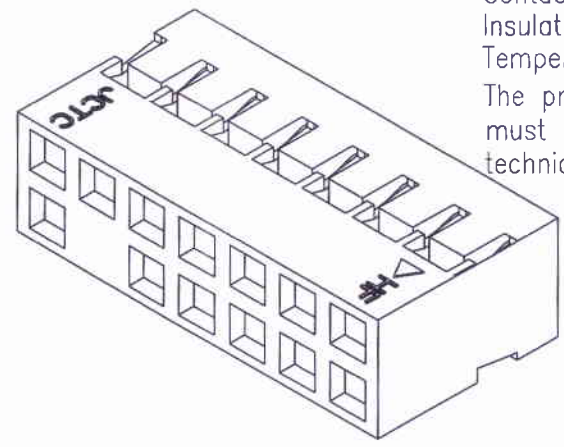
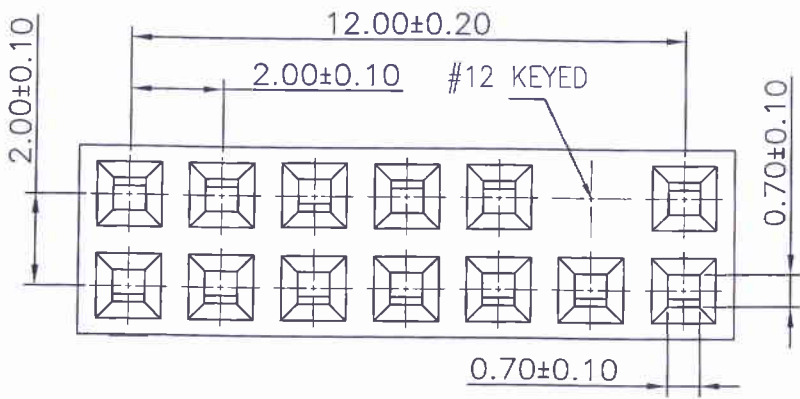


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G

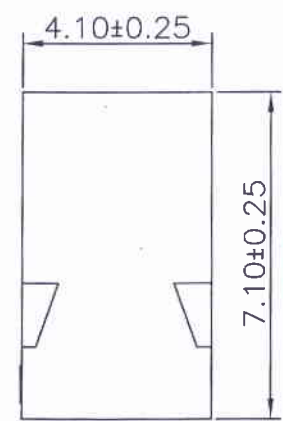

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

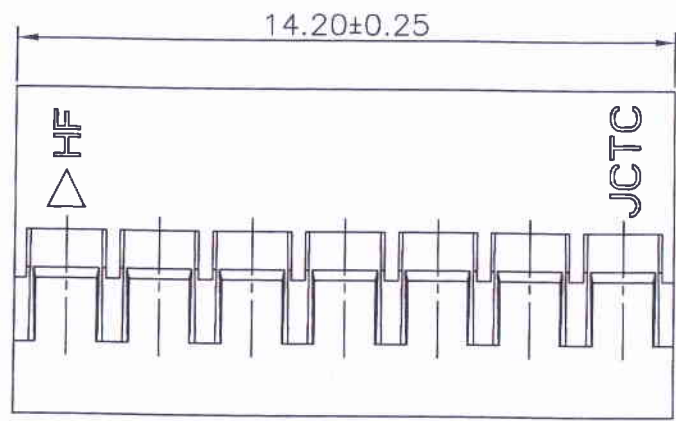

12003H00-2x7PA-K12-HF

- ① ② ③ ④ ⑤ ⑥
- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A: Product color(A--Y)
Blank: Natural type
- ⑤ K12 : #12 KEYED
- ⑥ HF : Halogen Free



Suitable for JCTC 12003 series terminal

Part No.	Material	Color
12003H00-2x7PA-K12-HF	Nylon66,UL 94V-0	Black

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:	
A0	新图面发行	19.12.25		LINEAR	ANGLES	APPROVED: [Signature]				12003H00-2x7PA-K12-HF	
			0.00±0.15	X° ±3°	DESIGNER: [Signature]	DWG. NO:					
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN: 张振坤	19.12.25	TITLE: DB双排 2.0mm PITCH HOUSING	ENDE05		
									REV: A0	SHEET: 1/1	

1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H