


Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Circuits No.	Dimensions	
	A	B
2P	--	4.20
3P	4.00	6.20
4P	6.00	8.20
5P	8.00	10.20
6P	10.00	12.20
7P	12.00	14.20
8P	14.00	16.20
9P	16.00	18.20
10P	18.00	20.20
11P	20.00	22.20
12P	22.00	24.20
13P	24.00	26.20
14P	26.00	28.20
15P	28.00	30.20
16P	30.00	32.20
17P	32.00	34.20
18P	34.00	36.20
19P	36.00	38.20
20P	38.00	40.20
21P	40.00	42.20
22P	42.00	44.20
23P	44.00	46.20
24P	46.00	48.20
25P	48.00	50.20

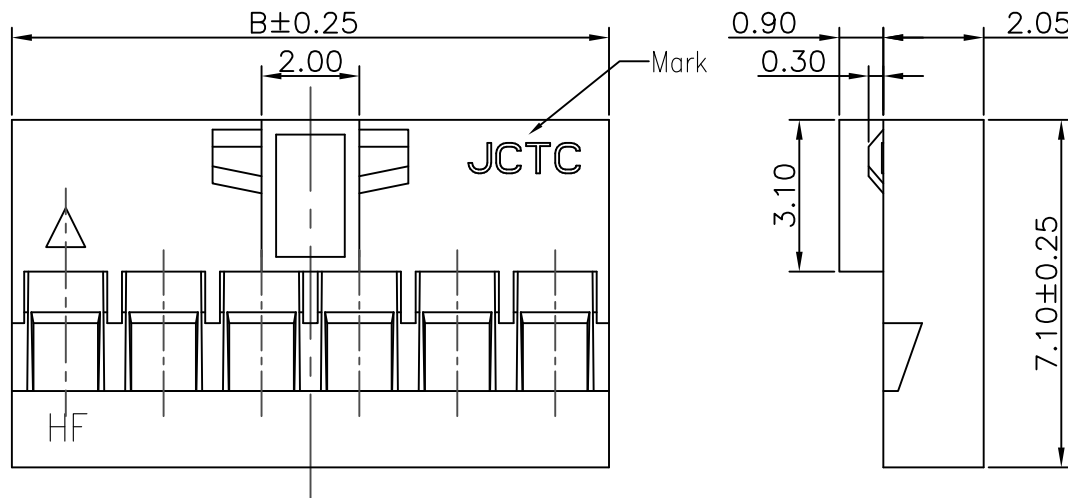

12003H00-NPX-HF-T3-S1  
 ① ② ③④ ⑤ ⑥ ⑦

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank : Natural type
- ⑤ HF : Halogen Free
- ⑥ T3 : Mount type
- ⑦ S1 : S1 type

Part No.	Material	Color
12003H00-NPK-HF-T3-S1	Nylon 66,UL94V-0	白色
12003H00-NPA-HF-T3-S1	Nylon 66,UL94V-0	黑色

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO: 12003H00-NPX-HF-T3-S1	DWG. NO: ENDE05	 TERMINAL&CONNECTORS
C1	新增黑色规格	13. 10. 14		LINEAR	ANGLES	APPROVED					
C2	HR1403100022	14. 03. 10	0. 0±0. 25	X° REF±6°	DESIGNER						
C3	HR1505180100	15. 06. 17	0. 00±0. 15	X° ±3°	DRAWN	伍文聰	20. 12. 24	TITLE: DB 单排 2.0mm PITCH HOUSING			
C4	更新图框	20. 12. 24	SIZE: A4	0. 000±0. 08	X° X'±2°			REV: C4	SHEET: 1/1		