

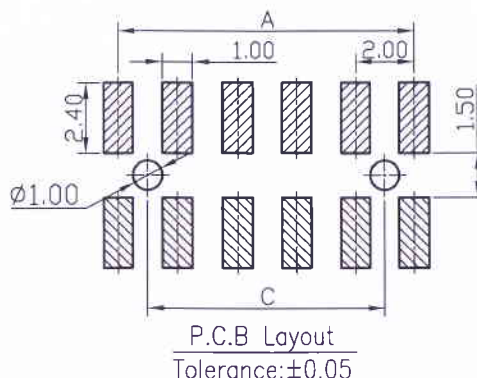





technical standard control requirements

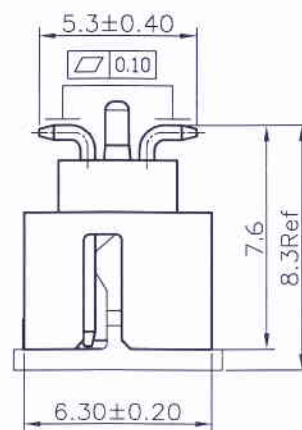

Plated
No Mark
ape & Real


胜蓝科技股份有限公司
2020.09.22
工程部
技术文件发行章

						Part No.		Insulator		PIN Material		
						12012W00-2xNPA-SF-S1-0G-NK-R		High temperature plastic/Black		Brass/15u"Au on contact area		
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS	
AO	新图面发行	20.09.17		LINEAR	ANGLES	1:1	 20.09.17	2012W00-2xNPX-SF-S1-XX-NK-R	ENDE05			
				0.0±0.25	X° REF±6°	APPROVED						
				UNIT: MM	0.00±0.15	X° ±3°				DESIGNER		
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪	20.09.17	TITLE: 2.00mm PITCH DUAL ROW SMT TYPE 180° WAFER (带柱)		REV: AO	SHEET: 1/2


JCTC®
TERMINAL&CONNECTORS

TITLE: 2.00mm PITCH DUAL ROW
SMT TYPE 180° WAFER (帶柱)



2x2P~2x3P Contacts

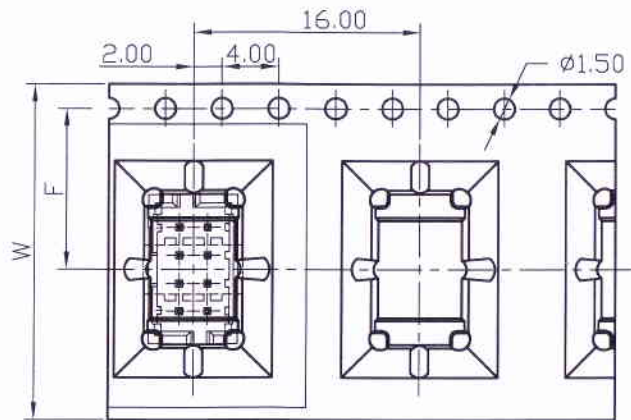

2x4P~2x22P Contacts

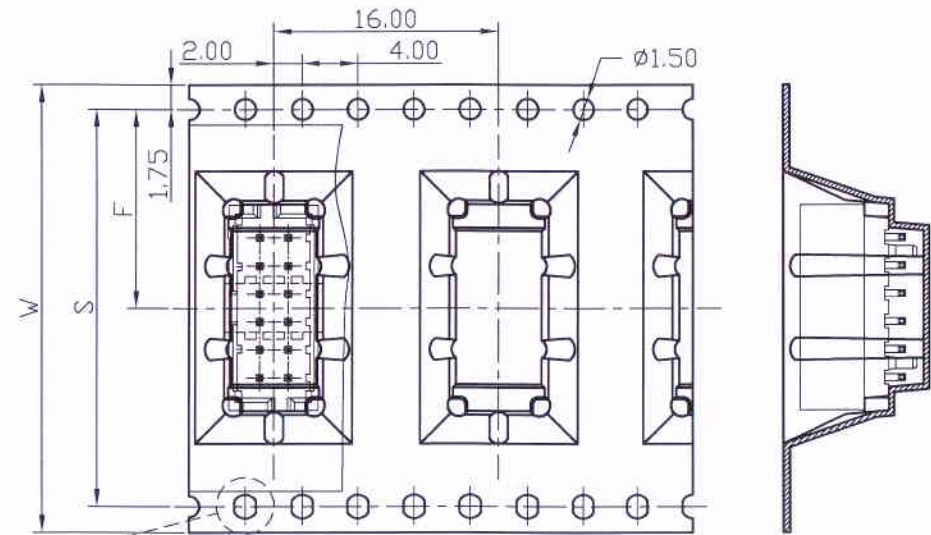

Unreeling direction →


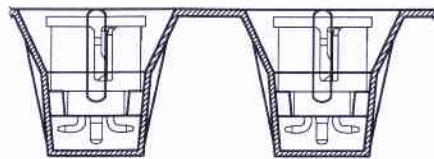


Carrier tape




Leader part (Empty) 160 min.

Tail part (Empty) 160 min.

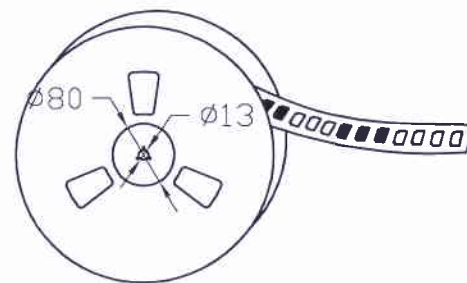

Load carton



Sealed carton

Number of Contacts	W±0.3	F±0.1	S±0.1	pcs/Reel	pcs/Box
2x3~2x4PP	24	11.50	--	500	5,000
2x5P~2x7P	32	14.20	28.40	500	4,000
2x8P~2x13P	44	20.20	40.40	500	3,000
2x14P~2x19P	56	20.20	40.40	500	2,500
2x20P~2x22P	72	34.20	68.40	500	1,500

REV.	REVISION RECORD	DATE
A0	新图面发行	20.09.17

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
LINEAR	ANGLES	APPROVED	伍文聪	20.09.17
0.0±0.25	X° REF±6°	DESIGNER	伍文聪	20.09.17
0.00±0.15	X° ±3°	DRAWN	伍文聪	20.09.17
0.000±0.08	X° X'±2°			

PART. NO:	12012W00-2xNPX-SF-S1-XX-NK-R	DWG. NO:	ENDE05
TITLE:		2.00mm PITCH DUAL ROW SMT TYPE 180° WAFER (带柱)	
REV:	A0	SHEET:	2/2

JCTC
TERMINAL&CONNECTORS