


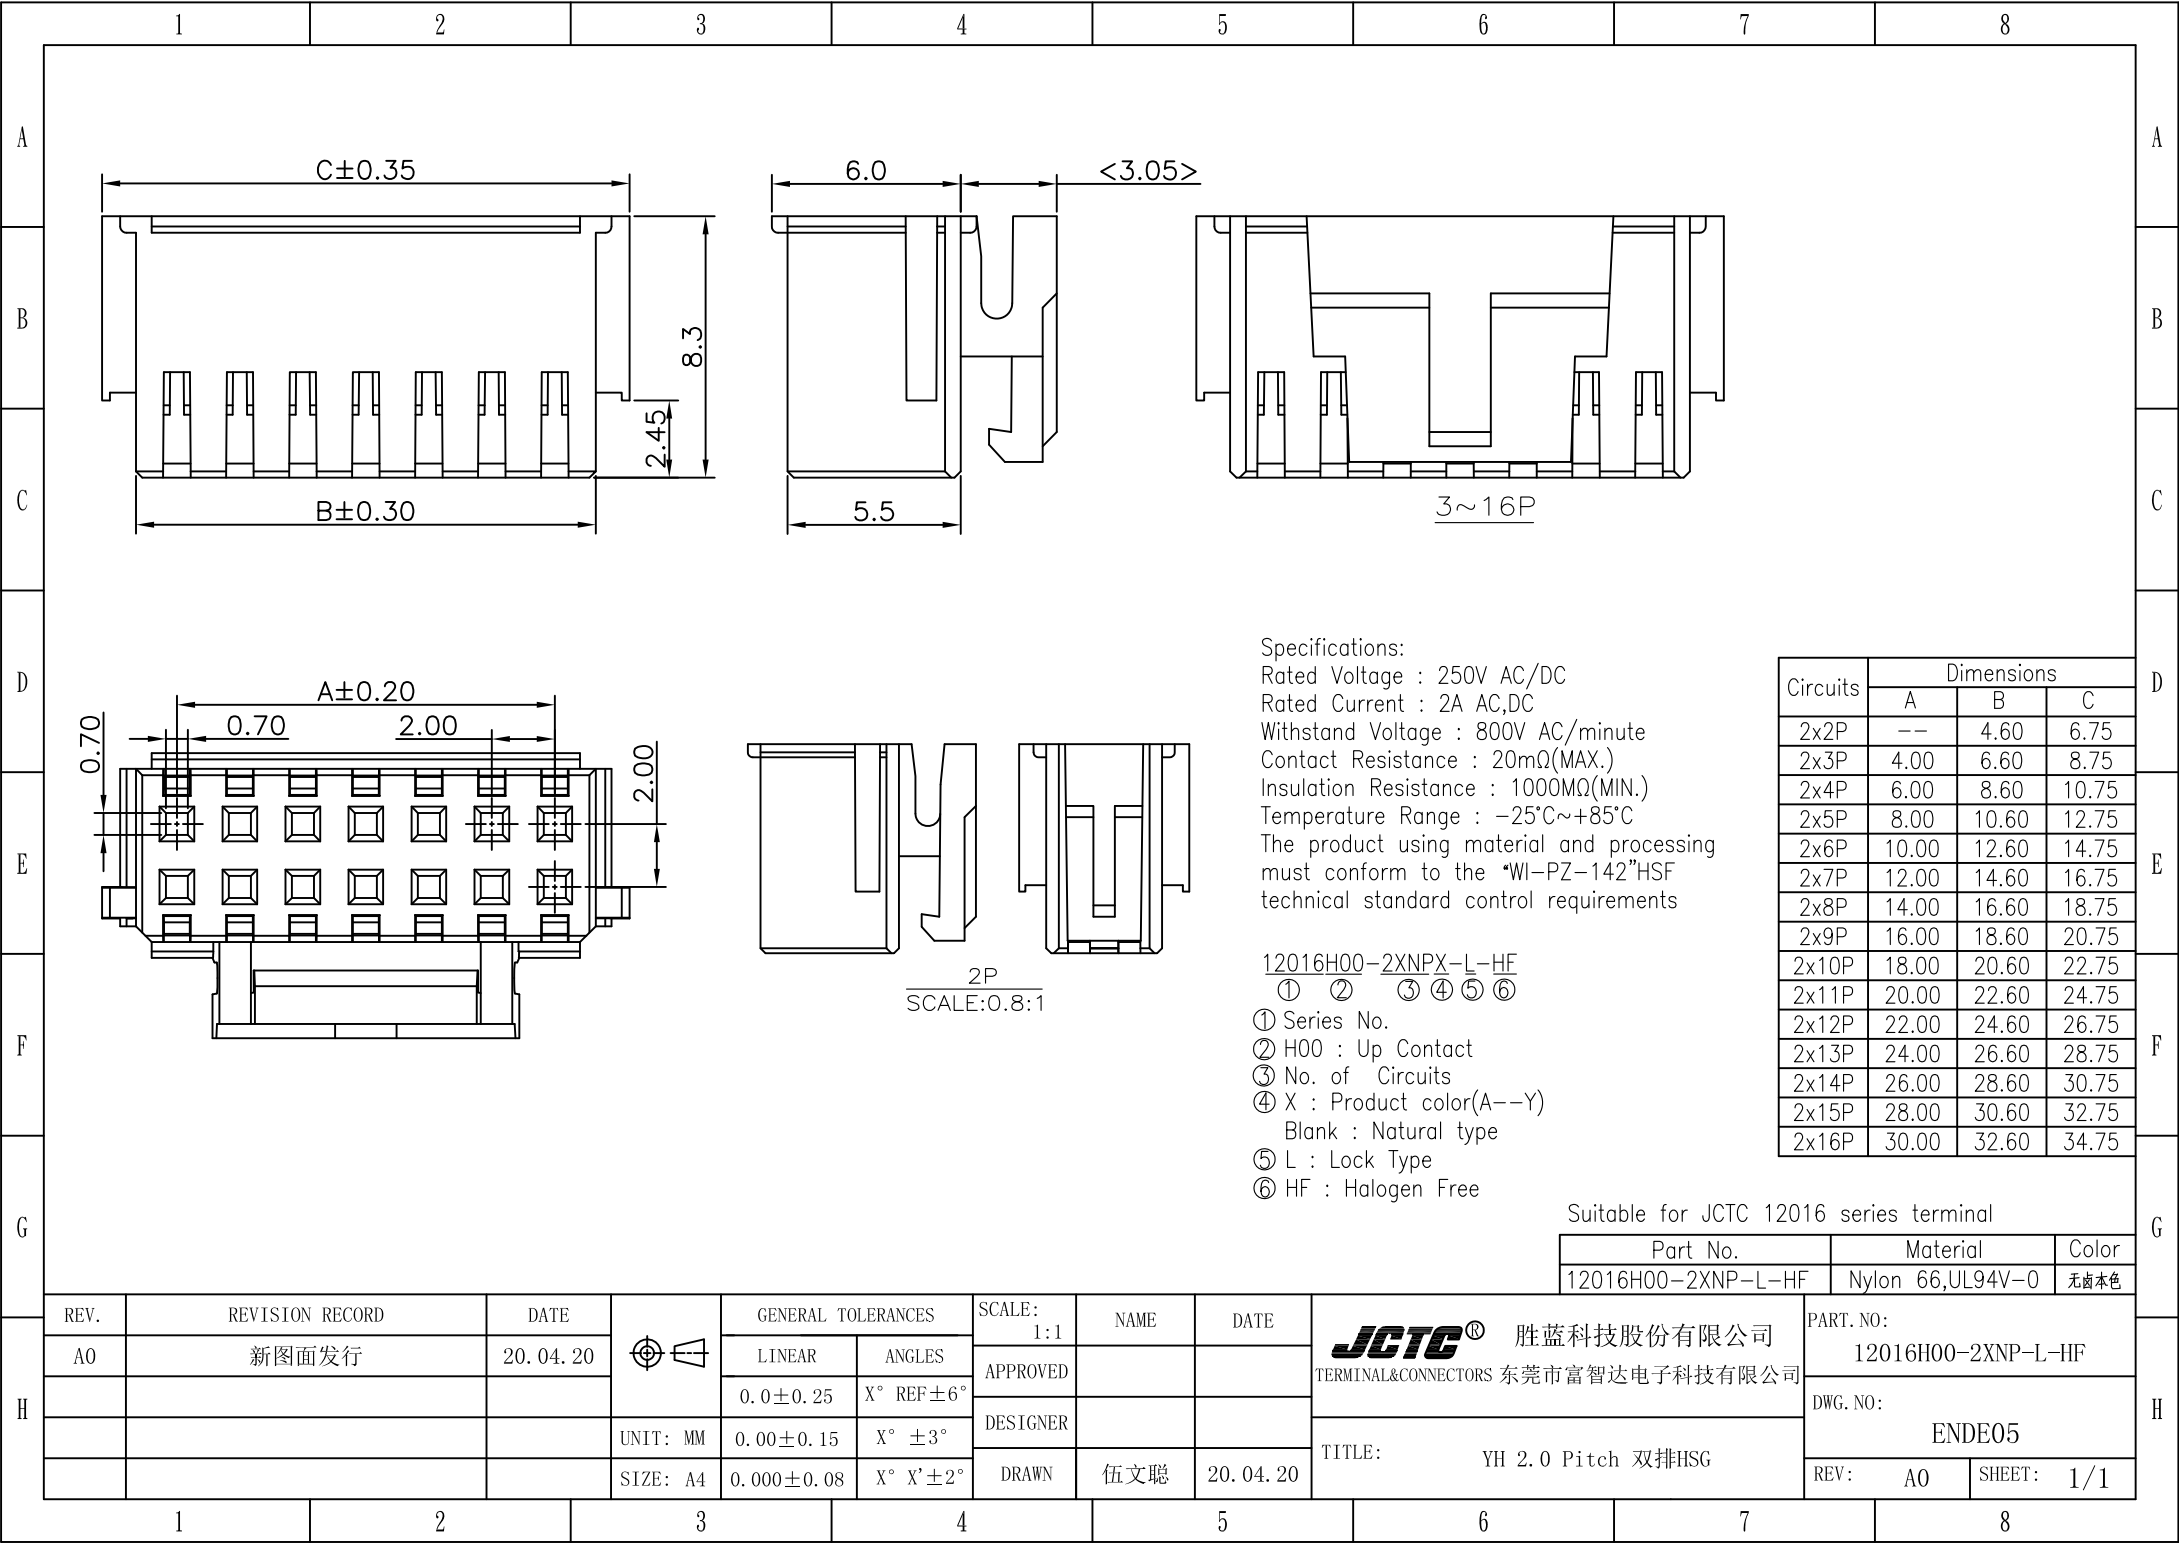

Specifications:
Rated Voltage : 250V AC/DC
Rated Current : 2A AC,DC
Withstand Voltage : 800V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -25°C~+85°C
The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12016H00-2XNP-L-HF
① ② ③ ④ ⑤ ⑥
① Series No.
② H00 : Up Contact
③ No. of Circuits
④ X : Product color(A--Y)
Blank : Natural type
⑤ L : Lock Type
⑥ HF : Halogen Free

Circuits	Dimensions		
	A	B	C
2x2P	--	4.60	6.75
2x3P	4.00	6.60	8.75
2x4P	6.00	8.60	10.75
2x5P	8.00	10.60	12.75
2x6P	10.00	12.60	14.75
2x7P	12.00	14.60	16.75
2x8P	14.00	16.60	18.75
2x9P	16.00	18.60	20.75
2x10P	18.00	20.60	22.75
2x11P	20.00	22.60	24.75
2x12P	22.00	24.60	26.75
2x13P	24.00	26.60	28.75
2x14P	26.00	28.60	30.75
2x15P	28.00	30.60	32.75
2x16P	30.00	32.60	34.75

Suitable for JCTC 12016 series terminal

Part No.	Material	Color
12016H00-2XNP-L-HF	Nylon 66,UL94V-0	无卤本色

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	20. 04. 20		0. 0±0. 25	X° REF±6°	APPROVED		
				0. 00±0. 15	X° ±3°	DESIGNER		
				0. 000±0. 08	X° X'±2°	DRAWN	伍文聪	20. 04. 20

JCTC® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

PART. NO: 12016H00-2XNP-L-HF	
DWG. NO: ENDE05	
REV: A0	SHEET: 1/1