


RoHS

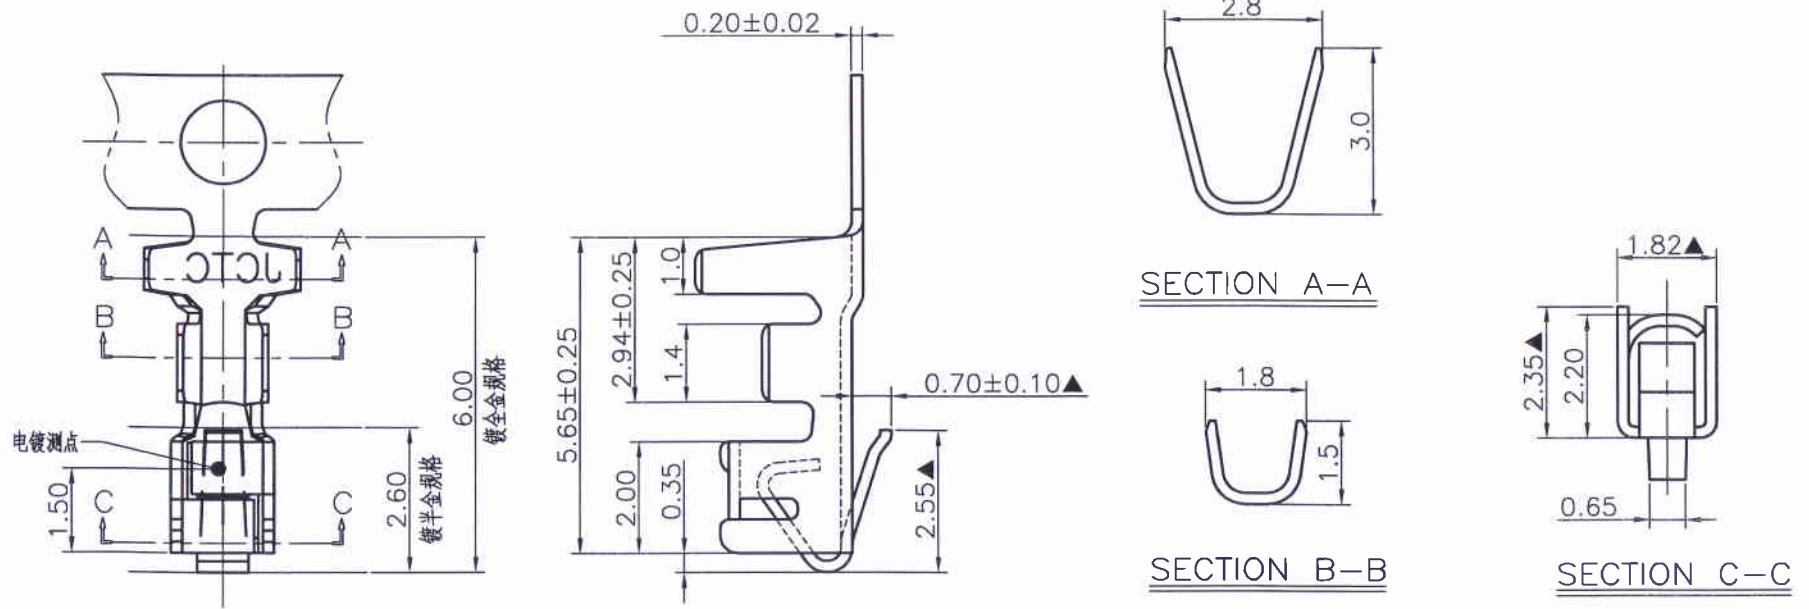

Note:12501TOP-XX-S

Finish

- 2E--Tin-plated(先冲后镀)
- 0A--Gold-flash
- 5A--Gold-flash
- 2--Tin-plated(先镀后冲)
- 0B--2u"
- 5B--2u"
- 0C--3u"
- 5C--3u"
- 0G--15u"
- 5G--15U"



Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel	Note
12501TOP-2-S	AWG #22~#28	1.70mm(max)	Phosphor Bronze	Tin-plated 60u"MIN	6,000 pcs	Stamping after plating
12501TOP-2E-S	AWG #22~#28	1.70mm(max)	Phosphor Bronze	Tin-plated 60u"MIN	6,000 pcs	Stamping before plating
12501TOP-0X-S	AWG #22~#28	1.70mm(max)	Phosphor Bronze	Gold-plated contact area	6,000 pcs	电镀测点区域镀厚金
12501TOP-5X-S	AWG #22~#28	1.70mm(max)	Phosphor Bronze	Gold-plated overall	6,000 pcs	电镀测点区域镀厚金

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	<b>JCTC</b> ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司 TITLE: XH2.5 端子
C1	ECN1007221044	10.07.22	LINEAR	1:1	APPROVED		
C2	ECN1301160008	13.01.16	0.0±0.25		DESIGNER		
C3	合并12501TOP-2-S与12501TOP-2E-S图面 新增镀金规格	16.04.22	0.00±0.15		DRAWN		
C4	更换公司名称	17.01.12	0.000±0.08		王国伟	17.01.12	

PART. NO:	12501TOP-XX-S
DWG. NO:	ENDE05
REV:	C4
SHEET:	1/1