


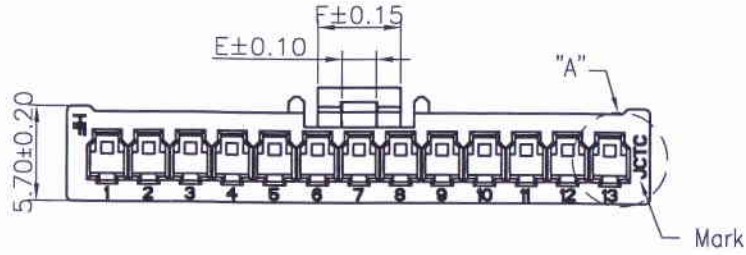

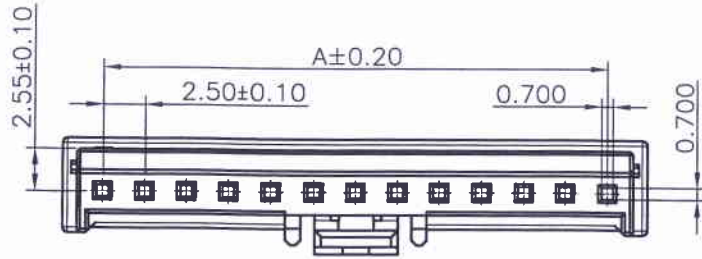
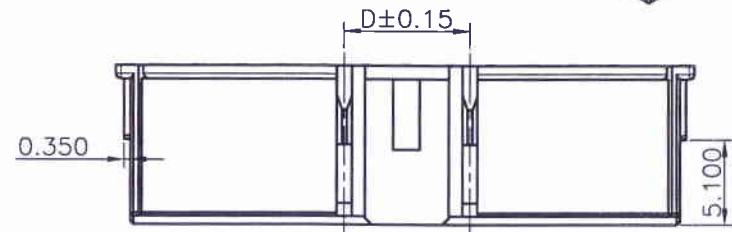



RoHS

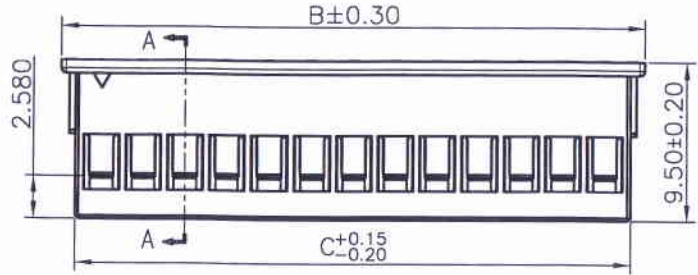

DETAIL "A"
SCALE 2:1

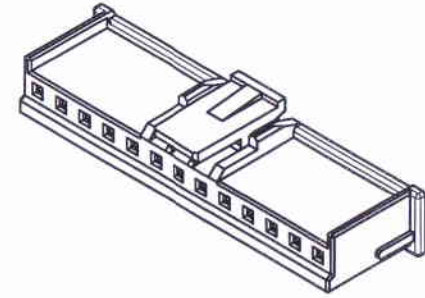


12505H00-NP-L-HF
① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ L: With Lock
- ⑤ HF: Halogen Free

Circuits Part No	Dimensions					
	A	B	C	D	E	F
2P	--	7.3	5.6	4.90	1.15	2.90
3P	5.0	9.8	8.1	7.00	2.05	4.40
4P	7.5	12.3	10.6	7.50	2.05	5.00
5P	10.0	14.8	13.1	7.50	2.05	5.00
6P	12.5	17.3	15.6	7.50	2.05	5.00
7P	15.0	19.8	18.1	7.50	2.05	5.00
8P	17.5	22.3	20.6	7.50	2.05	5.00
9P	20.0	24.8	23.1	7.50	2.05	5.00
10P	22.5	27.3	25.6	7.50	2.05	5.00
11P	25.0	29.8	28.1	7.50	2.05	5.00
12P	27.5	32.3	30.6	7.50	2.05	5.00
13P	30.0	34.8	33.1	7.50	2.05	5.00
14P	32.5	37.3	35.6	7.50	2.05	5.00
15P	35.0	39.8	38.1	7.50	2.05	5.00

5~15P



2~4P



Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

Suitable for JCTC 12505 series terminal

Part No.	Material	Color
12505H00-NP-L-HF	Nylon 66,UL94V-0	Natural(White)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C0	换图框发行	11.11.14	LINEAR	1:1	APPROVED	
C1	新增加PIN位规格	13.12.16	0.0±0.25	ANGLES	DESIGNER	
C2	HR1703020027	17.03.20	0.00±0.15	X° REF±6°	DRAWN	
			0.00±0.08	X° X'±2°		

JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		PART. NO: 12505H00-NP-L-HF-XX
TITLE: XA 2.50mm PITCH HOUSING		DWG. NO: ENDE05
REV: C2	SHEET: 1/1	