

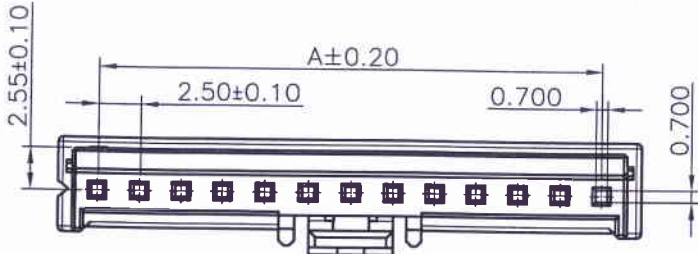



RoHS

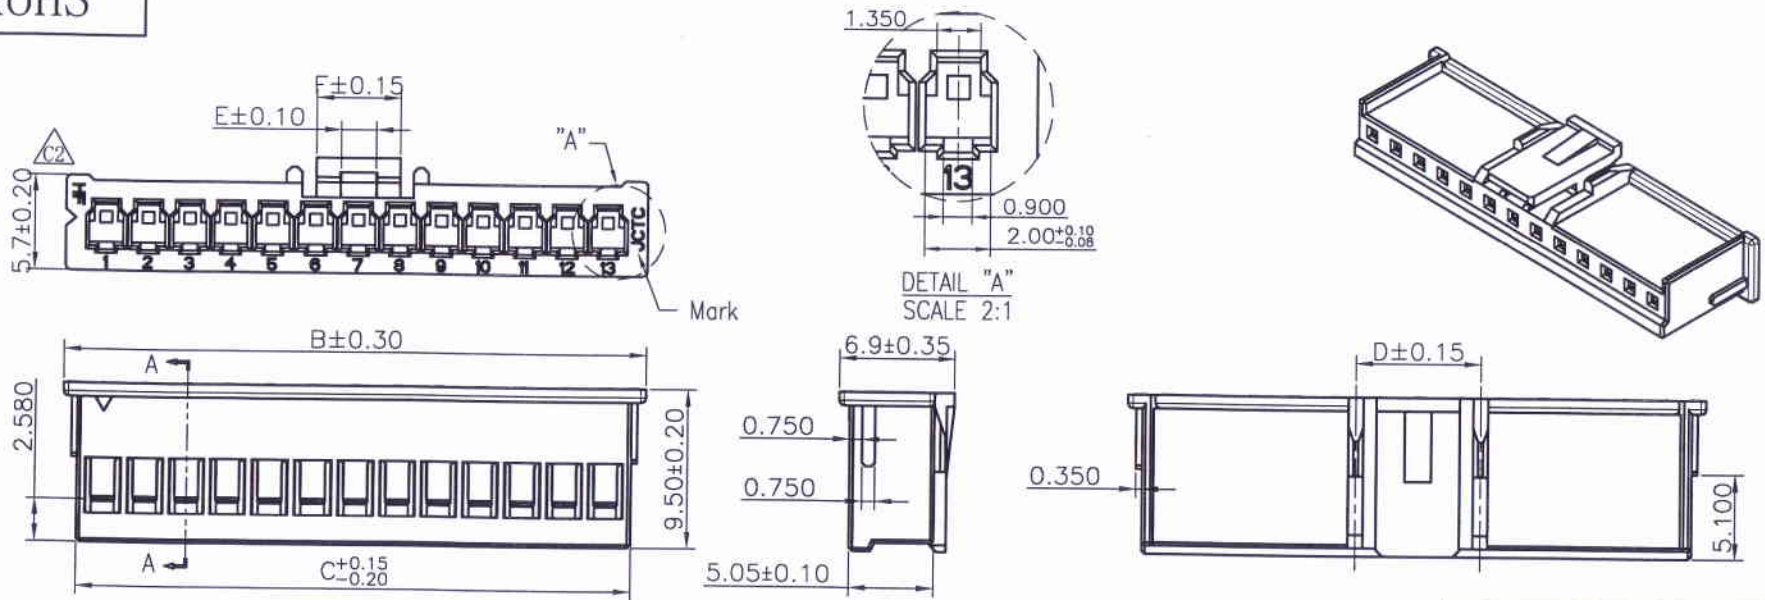

12505H00-NP-L-HF-NK
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ L: With Lock
- ⑤ HF: Halogen Free
- ⑥ NK: No Mark

Circuits Part No	Dimensions					
	A	B	C	D	E	F
2P	--	7.3	5.6	4.90	1.15	2.90
3P	5.0	9.8	8.1	7.00	2.05	4.40
4P	7.5	12.3	10.6	7.50	2.05	5.00
5P	10.0	14.8	13.1	7.50	2.05	5.00
6P	12.5	17.3	15.6	7.50	2.05	5.00
7P	15.0	19.8	18.1	7.50	2.05	5.00
8P	17.5	22.3	20.6	7.50	2.05	5.00
9P	20.0	24.8	23.1	7.50	2.05	5.00
10P	22.5	27.3	25.6	7.50	2.05	5.00
11P	25.0	29.8	28.1	7.50	2.05	5.00
12P	27.5	32.3	30.6	7.50	2.05	5.00
13P	30.0	34.8	33.1	7.50	2.05	5.00
14P	32.5	37.3	35.6	7.50	2.05	5.00
15P	35.0	39.8	38.1	7.50	2.05	5.00



Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

Suitable for JCTC 12505 series terminal

Part No.	Material	Color
12505H00-NP-L-HF-NK	Nylon 66,UL94V-0	Natural(White)

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
C0	换图框发行	11. 11. 14	SIZE: A4	0.0 ± 0.25	X° REF ± 6°	APPROVED	伍文聪	17.03.20
C1	新增加PIN位规格	13. 12. 16		0.00 ± 0.15	X° ± 3°	DESIGNER	伍文聪	17.03.20
C2	HR1703020027	17. 03. 20		0.000 ± 0.08	X° X' ± 2°	DRAWN	伍文聪	17. 03. 20

PART. NO:	
12505H00-NP-L-HF-NK	
DWG. NO:	
ENDE05	
REV:	SHEET:
C2	1/1

JCTC 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: XA 2.50mm PITCH HOUSING