

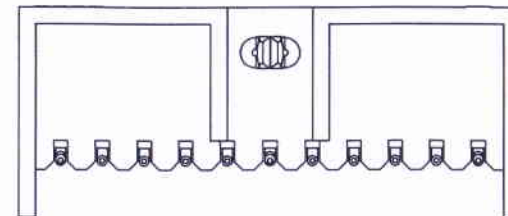
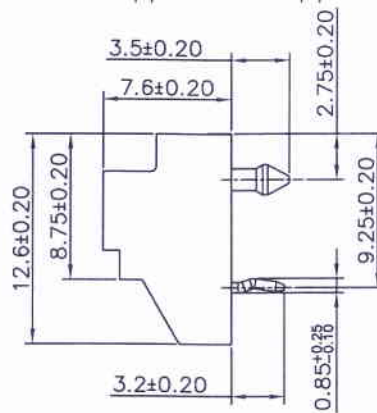


Circuits Part No	Dimensions		
	A	B	C
2P	-	7.50	5.80
3P	5.00	10.00	8.30
4P	7.50	12.50	10.80
5P	10.00	15.00	13.30
6P	12.50	17.50	15.80
7P	15.00	20.00	18.30
8P	17.50	22.50	20.80
9P	20.00	25.00	23.30
10P	22.50	27.50	25.80
11P	25.00	30.00	28.30
12P	27.50	32.50	30.80
13P	30.00	35.00	33.30
14P	32.50	37.50	35.80
15P	35.00	40.00	38.30

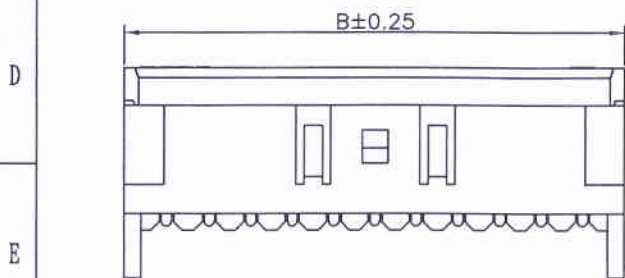

2P:0.8±0.10
3~15P:1.6±0.10

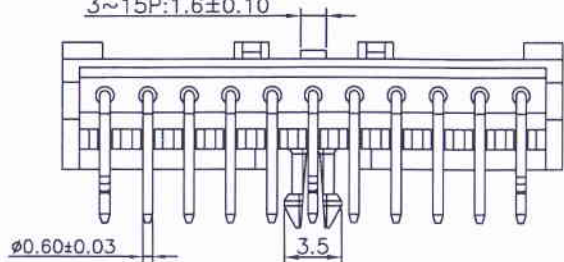


Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Contact: Brass/Matte Tin-plated
 Material: Nylon 66,UL94V-0 Halogen Free
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12505W90-NP X-F-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type J : Gray
- ⑤ F : With Boss
- ⑥ HF : Halogen Free

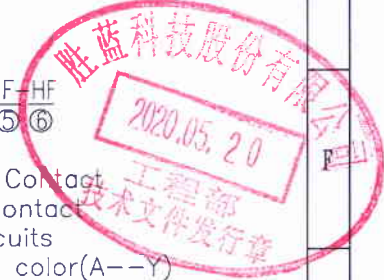

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS
C0	新图面发行	13. 10. 14		LINEAR	ANGLES	1:1					
C1	新增Pin位颜色	16. 12. 01	0.0±0.25	X° REF±6°	APPROVED	20.05.18 20.05.18	20.05.18	12505W90-NPX-F-HF	ENDE05		
C2	新增系列PIN位规格	17. 03. 02	0.00±0.15	X° ±3°	DESIGNER						
C3	WN2005180097	20. 05. 18	0.000±0.08	X° X' ±2°	DRAWN					张振坤	20.05.18
										REV: C3	SHEET: 1/1