

Specifications:


Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 Pitch Between Poles : 2.54mm  
 Wafer Pin specification : SQ 0.64±0.03mm

Ordering Information

12541H00-2XNPX-0A-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
- ⑤ 0A : Gold-flash
- ⑥ HF : Halogen Free

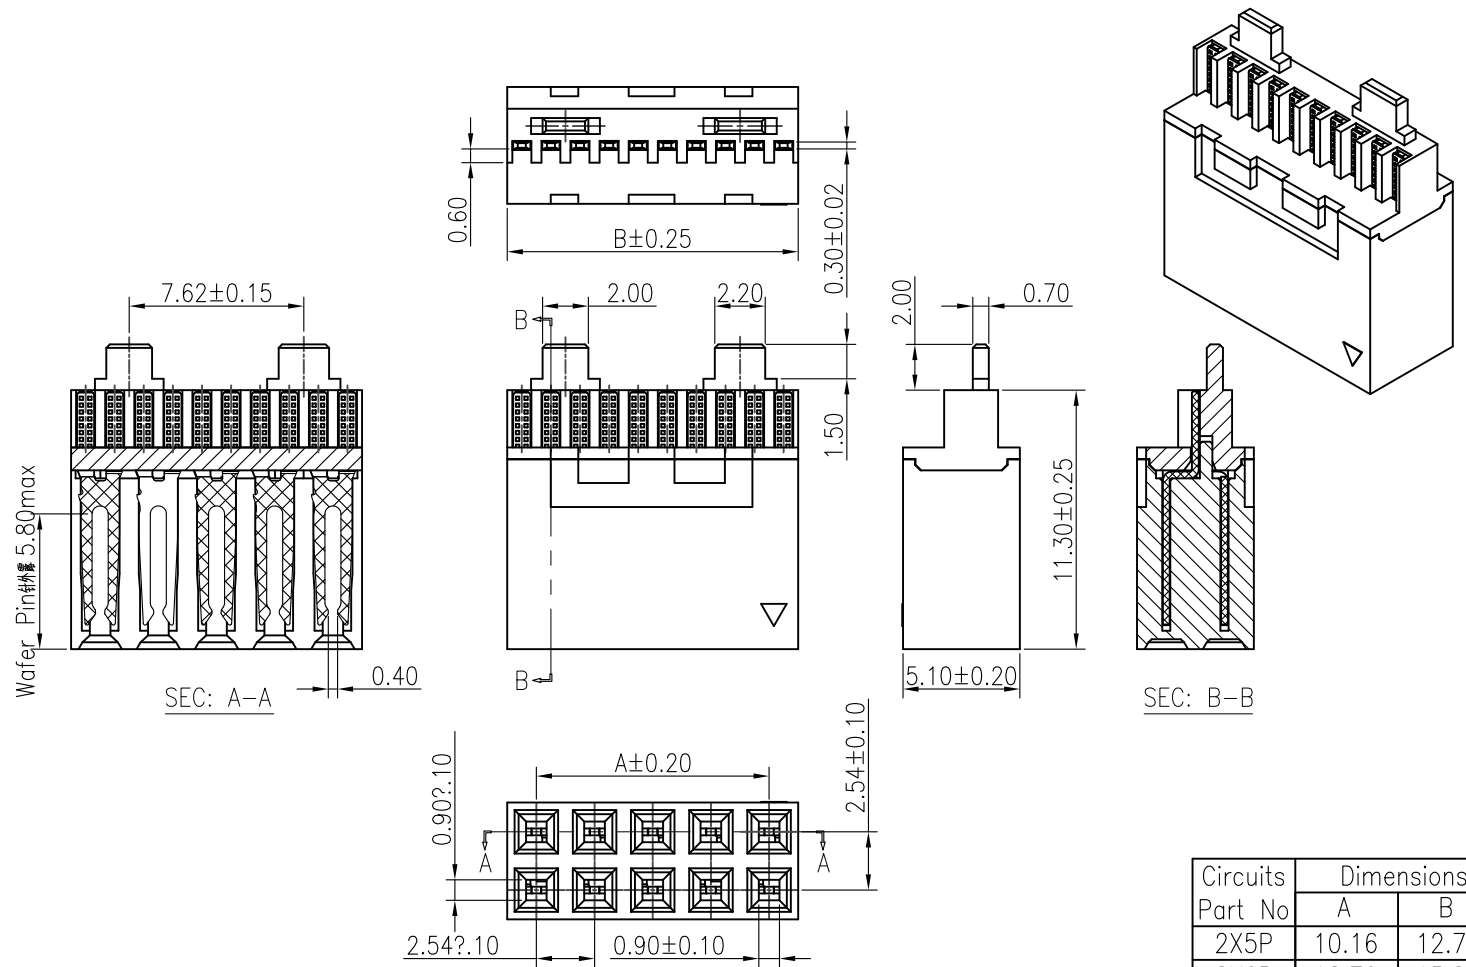

Circuits Part No	Dimensions	
	A	B
2X5P	10.16	12.70
2X6P	12.70	15.24

Part No.	Material/Color	PIN Material/Finish
12541H00-2XNPE-0A-K7-HF	Housing	Nylon 66,UL94V-0/Yellow(115U)
	Cap	LCP,UL94V-0/Black
12541H00-2XNPG-0A-K7-HF	Housing	Nylon 66,UL94V-0/Blue(300U)
	Cap	LCP,UL94V-0/Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS
A0	新图面发行	20.06.07	 LINEAR 0.0±0.25 0.00±0.15 SIZE: A4	ANGLES X° REF±6° X° ±3° X° X'±2°	1:1			12541H00-2XNPX-0X-HF	ENDE05	
					APPROVED				TITLE: 2.54mm Pitch Dual Row Housing	
					DESIGNER		焊线式			
					DRAWN	伍文聰	20.06.07			REV: A0 SHEET: 1/1