





环保物料

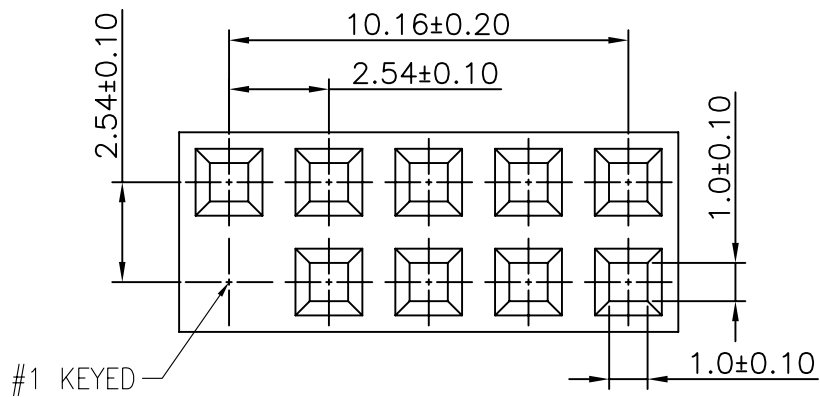

12541H00-2x5PA-007

① ② ③ ④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type

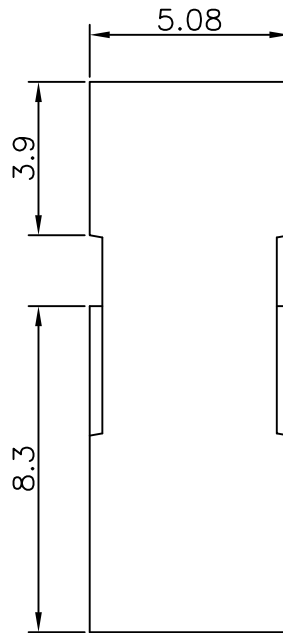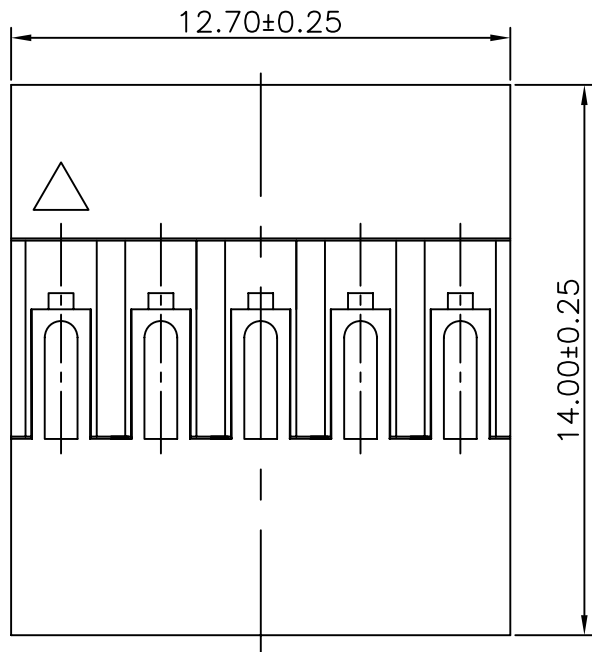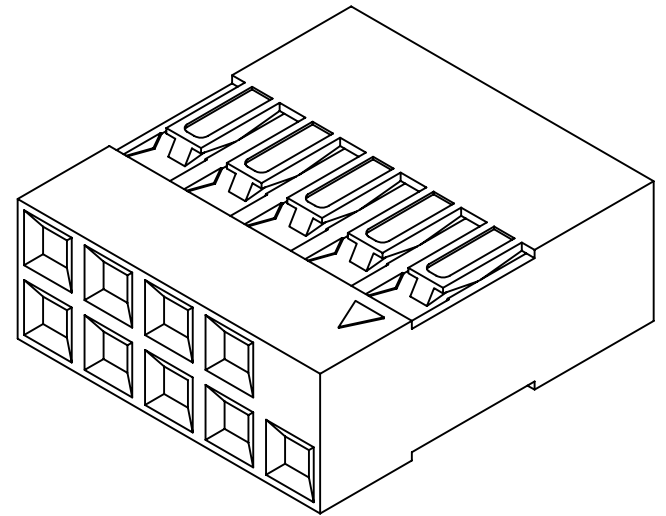

Specifications:

Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Pitch Between Poles : 2.54mm

Suitable for JCTC 12541 series terminal

Part No.	Material	Color	备注
12541H00-2x5PA-007	PBT,UL 94V-0	黑色	29925-1

一般公差 GENERAL TOLERANCE					绘图 DR.	JCTC 东莞市胜蓝电子有限公司			料号 PART NO.		
X.X ±0.25	X' ±5°	校对 CHK.	龚友连	▲ MAJOR DIM.	审核 CHK.	— 富强电子厂 —			12541H00-2x5PA-007		
X.XX ±0.15	X.X' ±2°	核准 APPD.	王志刚						文件编号 NUMBER		
X.XXX ±0.08						品名 TITLE			ENDE05		
单位 UNIT	mm				核准 APPD.	DB 双排 2.54mm PITCH HOUSING			比例 SCALE	SHEET	版次 REV.
版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.					1/1	1/1	C0