





环保物料

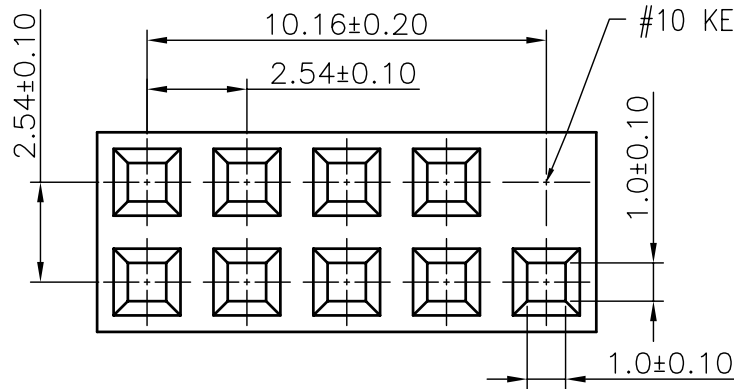

12541H00-2x5PA-B02

① ② ③ ④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type

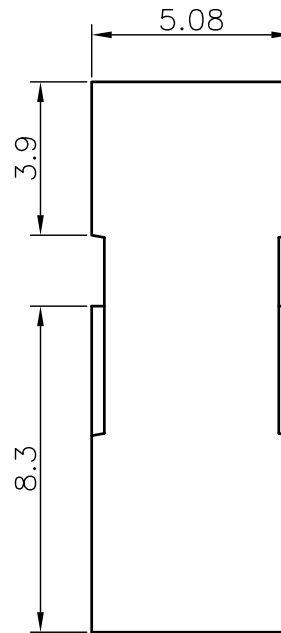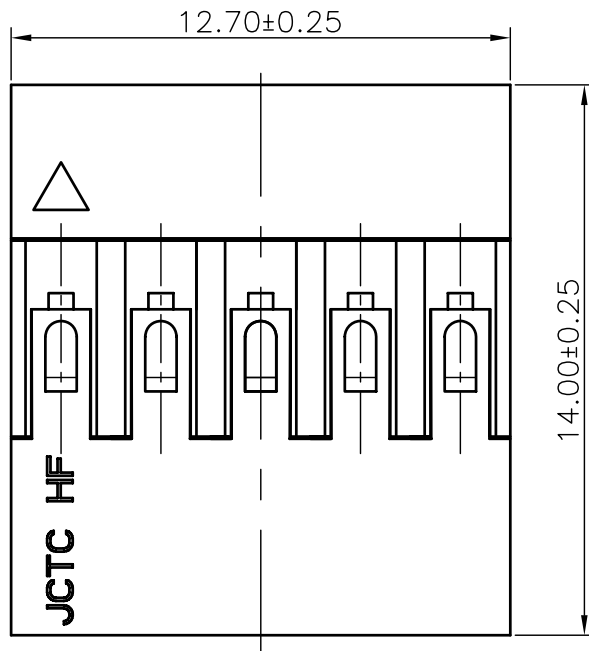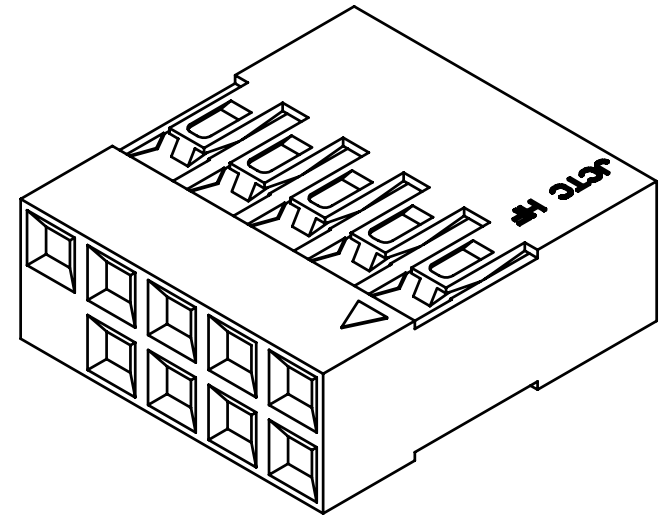

Specifications:

- Rated Voltage : 250V AC/DC
- Rated Current : 3A AC,DC
- Withstand Voltage : 800V AC/minute
- Contact Resistance : 20mΩ(MAX.)
- Insulation Resistance : 1000MΩ(MIN.)
- Temperature Range : -25°C~+85°C
- Pitch Between Poles : 2.54mm

Suitable for JCTC 12541 series terminal

Part No.	Material	Color	备注
12541H00-2x5PA-B02	Nylon 66,UL 94V-0	黑色 无齿	SL10-0004

一般公差 GENERAL TOLERANCE					绘图 DR.	JCTC 东莞市胜蓝电子有限公司 — 富强电子厂 —	料号 PART NO.		
X.X	±0.25	X'	±5°	校对			12541H00-2x5PA-B02	文件编号 NUMBER	
X.XX	±0.15	X.X'	±2°	审核			ENDE05	比例 SCALE SHEET 版次 REV.	
X.XXX	±0.08	▲ MAJOR DIM.		核准			1/1	1/1	C0
单位 UNIT	mm			核准 APPD.		品名 TITLE	DB 双排 2.54mm PITCH HOUSING		
版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.					