
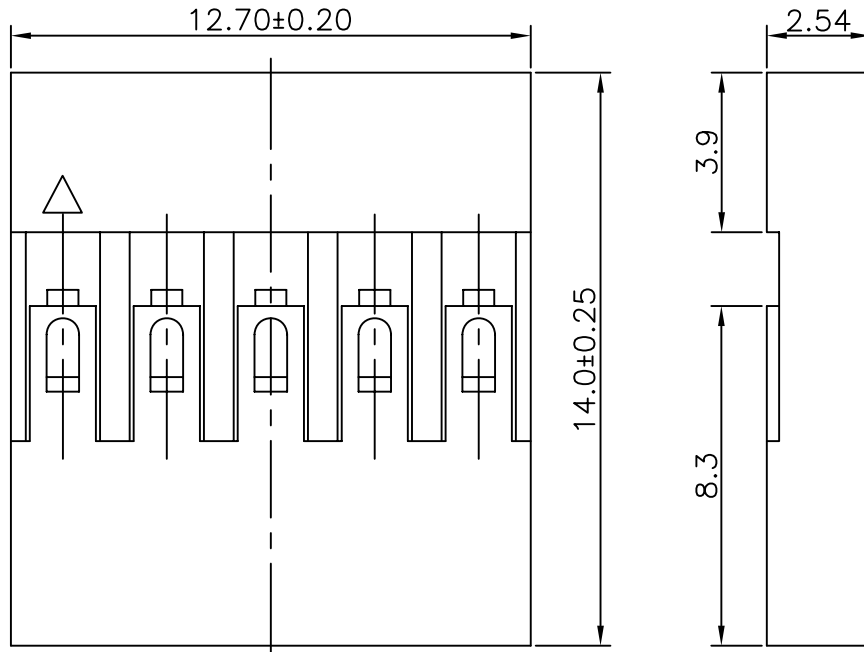
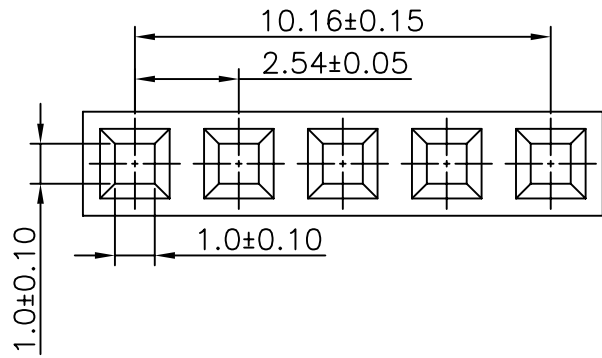


环保物料

12541H00-5PA-006

① ② ③④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type

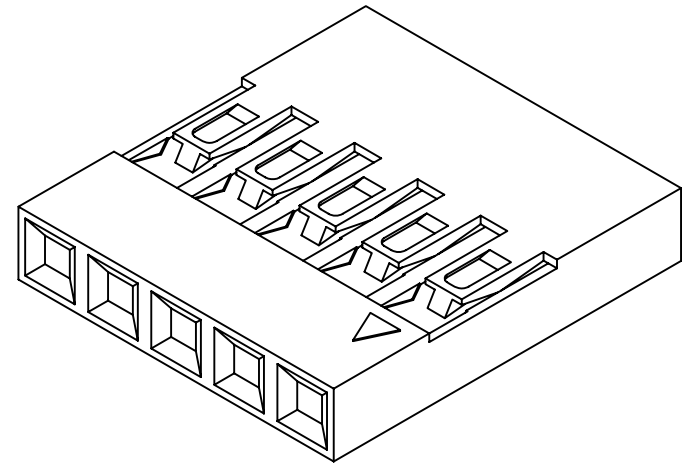

Specifications:

Rated Voltage : 250V AC/DC

Rated Current : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

Pitch Between Poles : 2.54mm

Suitable for JCTC 12541 series terminal

Part No.	Material	Color	备注
12541H00-5PA-006	Nylon 66,UL 94V-0	黑色	SL10-0004

一般公差 GENERAL TOLERANCE					绘图 DR.	欧阳小强
X.X	±0.25	X'	±5°	校对 CHK.	龚友连	JCTC 东莞市胜蓝电子有限公司 — 富强电子厂 —
X.XX	±0.15	X.X'	±2°	审核 CHK.	龚友连	
X.XXX	±0.08	▲ MAJOR DIM.		核准 APPD.	王志刚	
版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm

品名 TITLE	DB单排 2.54mm PITCH HOUSING
----------	---------------------------

料号 PART NO.	12541H00-5PA-006		
文件编号 NUMBER	ENDE05		
比例 SCALE	1/1	SHEET	1/1
版次 REV.	C0		