
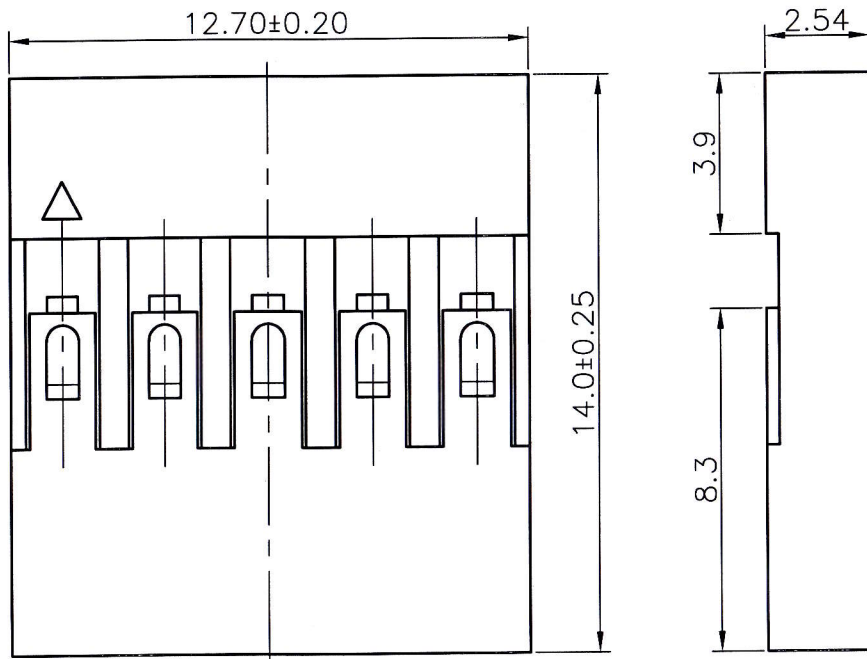
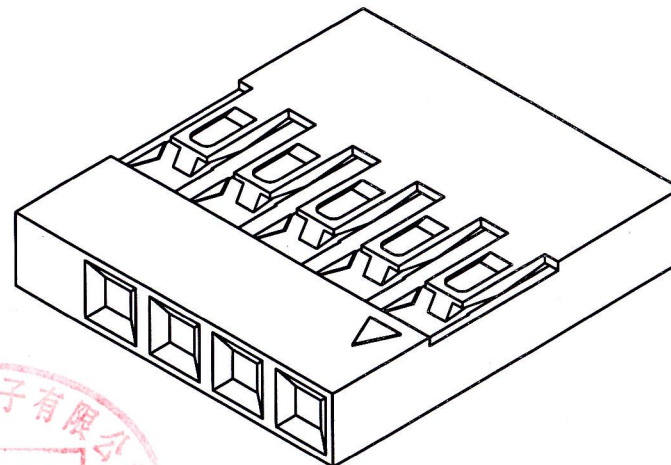


环保物料

12541H00-5PA-008

① ② ③④

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)  
Blank : Natural type

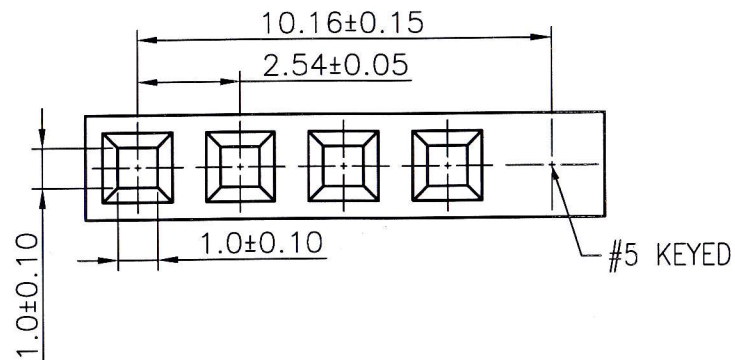

Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

Part No.	Material	Color
12541H00-5PA-008	Nylon 66,UL 94V-0	黑色

版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
C0	13.07.24	换图框发行	龚友连	王志刚

一般公差 GENERAL TOLERANCE	
X.X ±0.25	X' ±5'
X.XX ±0.15	X.X' ±2'
X.XXX ±0.08	▲ MAJOR DIM.
单位 UNIT	mm

绘图 DR.	卢小锋
校对 CHK.	[Signature]
审核 APPD.	[Signature]

**JCTC** 东莞市胜蓝 东莞胜景 苏州伟聚 东莞富强

品名 TITLE: DB 单排 2.54mm PITCH HOUSING

料号 PART NO.	12541H00-5PA-008	
文件编号 NUMBER	ENDE05	
比例 SCALE	SHEET	版次 REV.
1/1	1/1	C0