
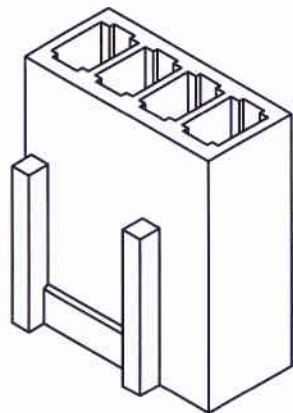


环保物料



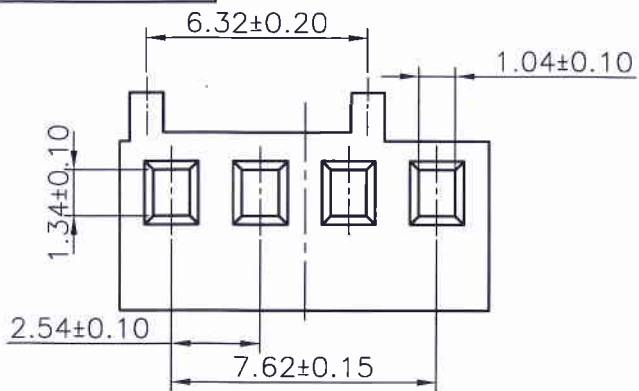


Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 2.5A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

12543H00-NPX-A-HF

① ② ③④⑤⑥

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank: Natural type
- ⑤ A : Mount type
- ⑥ HF : Halogen Free

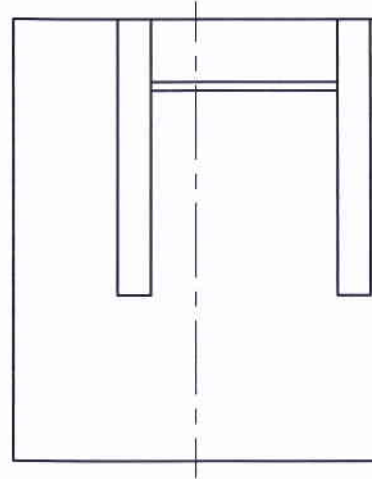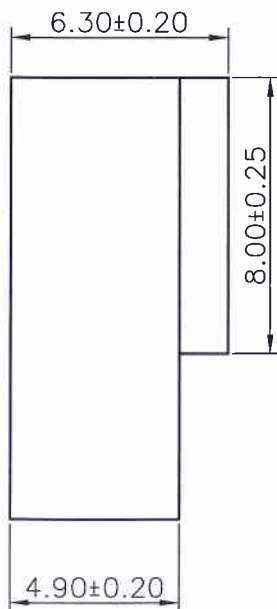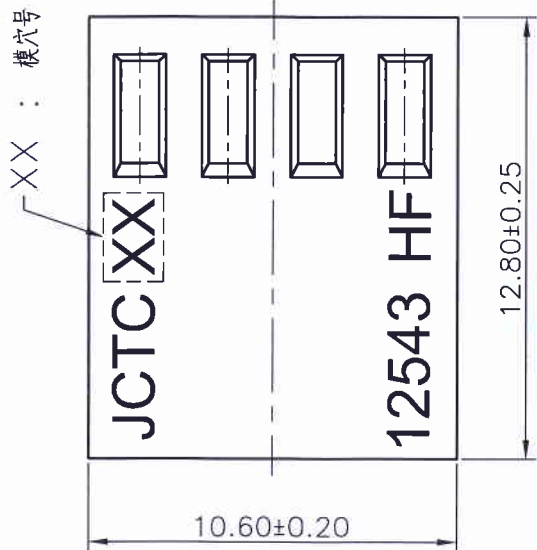

Part No.	Material	Color
12543H00-4PM-A-HF	Nylon66,UL 94V-0	米黄色无卤
12543H00-4PK-A-HF	Nylon66,UL 94V-0	白色无卤

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
C2	HN1206010039	12.06.01		0.0±0.25	X° REF±6°	APPROVED		
C3	增加蓝色规格	13.09.25		0.0±0.15	X° ±3°	DESIGNER	伍文聪	17.01.10
C4	HN1407290134	14.07.29		0.000±0.08	X° X'±2°	DRAWN	伍文聪	17.01.10
C5	更新公司名称	17.01.10	SIZE: A4					

**JCTC**® 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

PART. NO:  
12543H00-NPX-A-HF

DWG. NO:  
ENDE05

TITLE:  
2.54mm PITCH HOUSING

REV: C5 SHEET: 1/1