
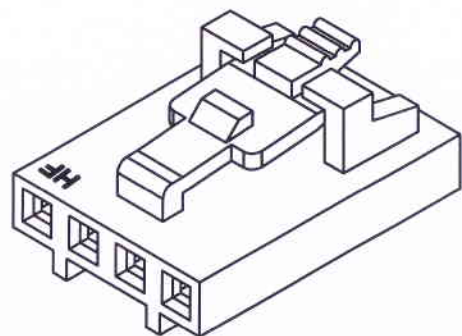


RoHS




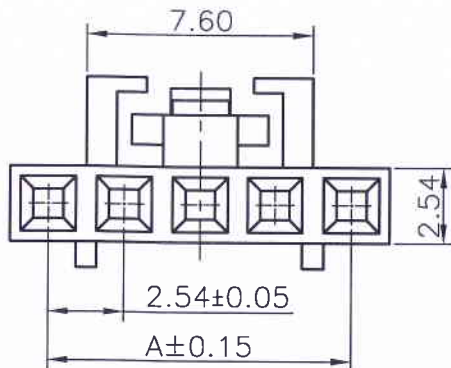


12547H00-NPX-HF

① ② ③④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ HF : Halogen Free

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

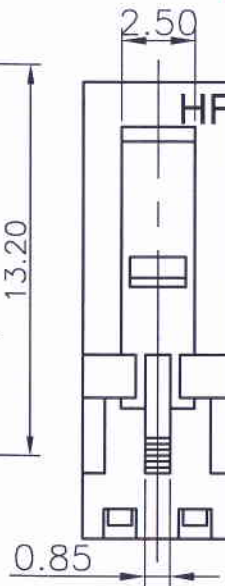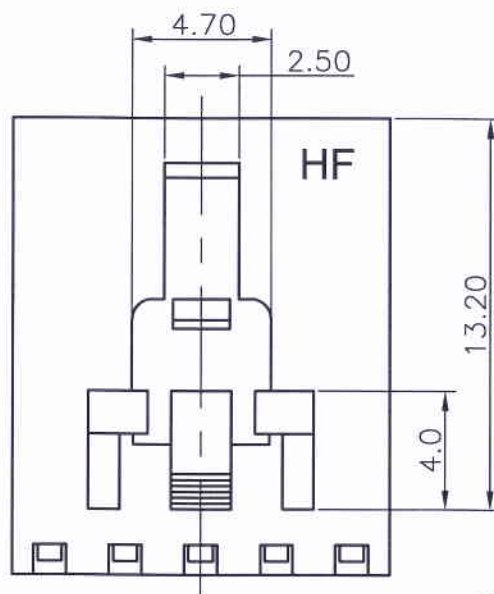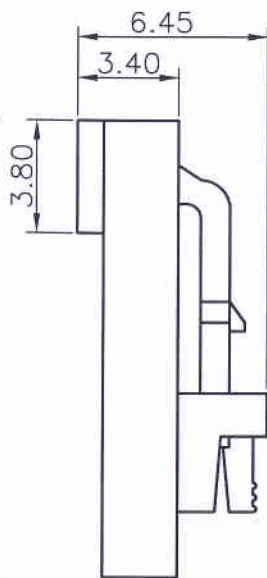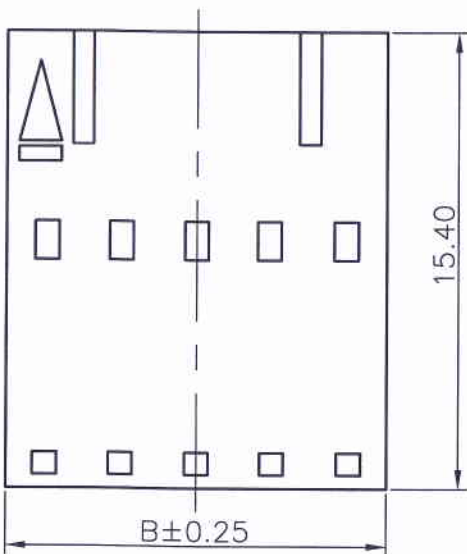

| Circuits Part No | Dimensions | |
|---------------------|------------|-------|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |

| Part No. | Material | Color |
|-----------------|-------------------|-------|
| 12547H00-NP-HF | Nylon 66,UL 94V-0 | 本色无卤 |
| 12547H00-NPA-HF | Nylon 66,UL 94V-0 | 黑色无卤 |

| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |
|------|-----------------|----------|------------------------|--------------------|----------|---------------|----------|------|
| C0 | 新图面发行 | 13.05.07 | | LINEAR | ANGLES | APPROVED | | |
| C1 | 新增2P规格 | 13.07.04 | 0.0±0.25 | X° REF±6° | DESIGNER | | | |
| C2 | 更新公司名称 | 17.03.02 | UNIT: MM 0.00±0.15 | X° ±3° | DRAWN | 伍文聪 | 17.03.02 | |
| | | | SIZE: A4 0.000±0.08 | X° X'±2° | | | | |

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: Molex2.54mm PITCH HOUSING单排带扣

| |
|-----------------------------|
| PART NO: 12547H00-NPX-HF |
| DWG. NO: ENDE05 |
| REV: C2 SHEET: 1/1 |