
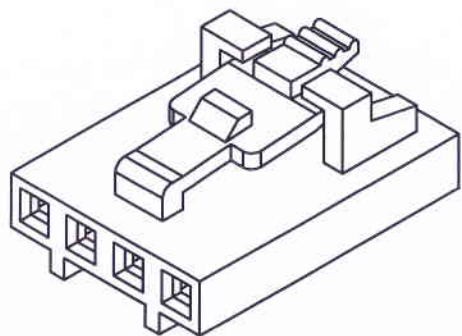


RoHS



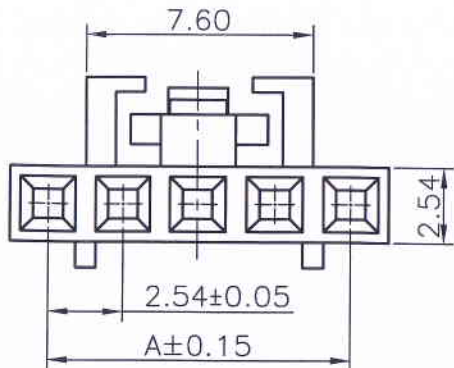


12547H00-NPX

① ② ③④

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

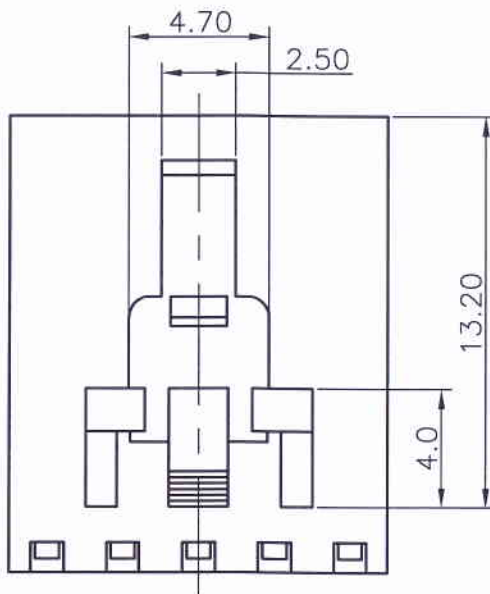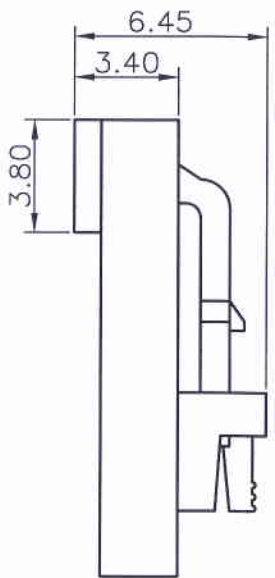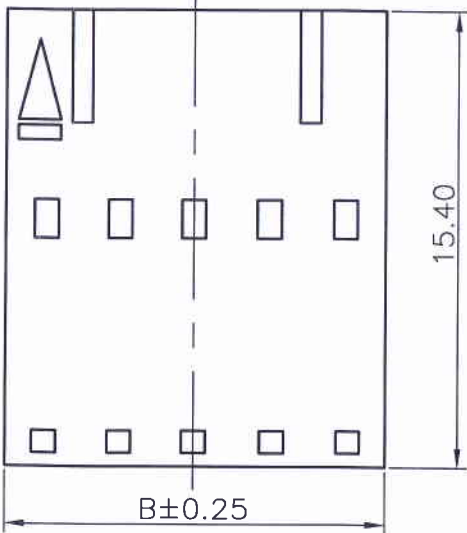

Circuits Part No	Dimensions	
	A	B
3P	5.08	7.62
4P	7.62	10.16
5P	10.16	12.70
6P	12.70	15.24
7P	15.24	17.78
8P	17.78	20.32
9P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48

Suitable for JCTC 12547 series terminal

Part No.	Material	Color
12547H00-NPA	PBT,UL 94V-0	黑色
12547H00-NPE	PBT,UL 94V-0	黄色

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
C1	新增加黑色无卤规格	10.04.28		LINEAR	ANGLES	APPROVED		
C2	HN1206040040	12.06.04	0.0±0.25	X° REF±6°	DESIGNER			
C3	区分开有卤无卤规格	13.05.07	0.00±0.15	X° ±3°	DRAWN			
C4	更新公司名称	17.03.02	0.000±0.08	X° X'±2°				

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: Molex2.54mm PITCH HOUSING单排带扣

PART. NO:	12547H00-NPX-XX	
DWG. NO:	ENDE05	
REV:	C4	SHEET: 1/1