

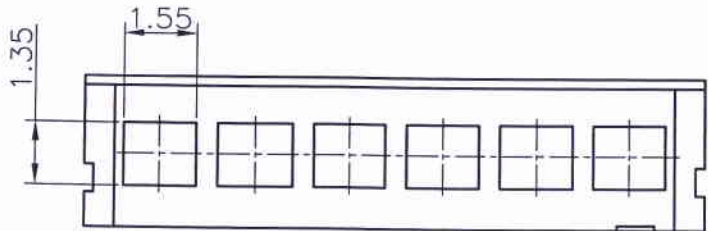

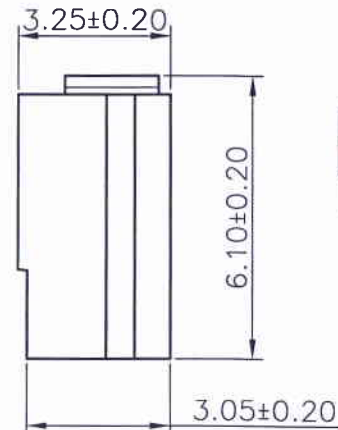


RoHS

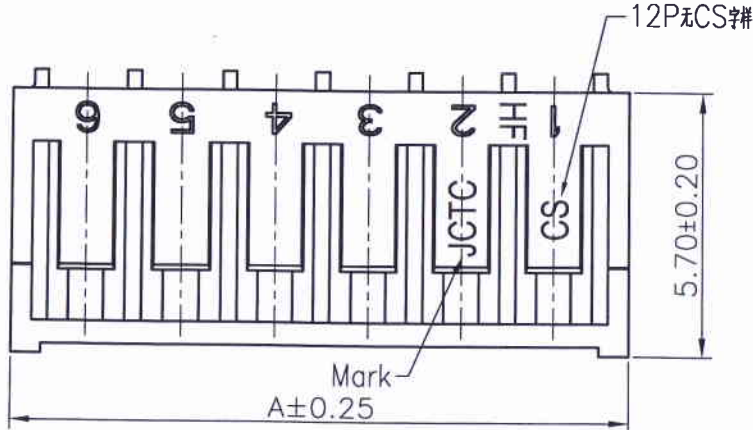

Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 2A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

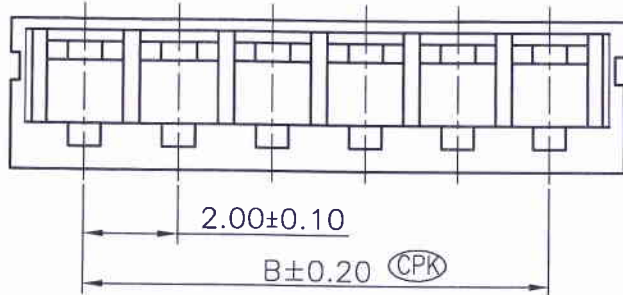

Circuits No.	Dimensions	
	A	B
2P	5.30	2.00
3P	7.30	4.00
4P	9.30	6.00
5P	11.30	8.00
6P	13.30	10.00
7P	15.30	12.00
8P	17.30	14.00
9P	19.30	16.00
10P	21.30	18.00
11P	23.30	20.00
12P	25.30	22.00
13P	27.30	24.00
14P	29.30	26.00
15P	31.30	28.00
16P	33.30	30.00
17P	35.30	32.00
18P	37.30	34.00
19P	39.30	36.00
20P	41.30	38.00

22001H00-NP X-HF-NK  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
A : Black type
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark

Suitable for JCTC 22001 series terminal

Part No.	Material	Color
22001H00-NP	Nylon 66,UL94V-0	本色
22001H00-NP-HF	Nylon 66,UL94V-0	无卤材料
22001H00-NPE-HF	Nylon 66,UL94V-0	黄色无卤
22001H00-NP-HF-NK	Nylon 66,UL94V-0	无卤材料
22001H00-NPA-HF-NK	Nylon 66,UL94V-0	黑色无卤

REV.	REVISION RECORD	DATE
C6	HN1309270161	13.09.27
D0	新增黑色规格	12.08.13
D1	HN1207100048	12.07.10
D2	HR1705020052	17.05.10

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE:	NAME	DATE
1:1		
APPROVED	<i>[Signature]</i>	17.05.10
DESIGNER	<i>[Signature]</i>	17.05.10
DRAWN	伍文聪	17.05.10

**JCTC®** 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司  
 TITLE: SAN 2.00mm PITCH HOUSING

PART NO.:
22001H00-NPX-XX
DWG. NO.:
ENDE05
REV.:
D2
SHEET:
1/1