

RoHS




22501H00-NP-B-HF-NK

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ B : Mount type
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark
Blank : Mark

Specifications:

- Rated Voltage : 250V AC/DC
- Rated Current : 2A AC,DC
- Withstand Voltage : 1000V AC/minute
- Contact Resistance : 10mΩ(MAX.)
- Insulation Resistance : 1000MΩ(MIN.)
- Temperature Range : -25°C~+85°C
- Suitable for JCTC 22501 series terminal

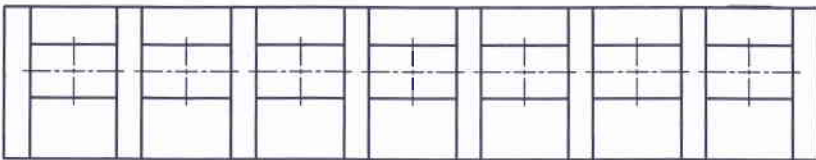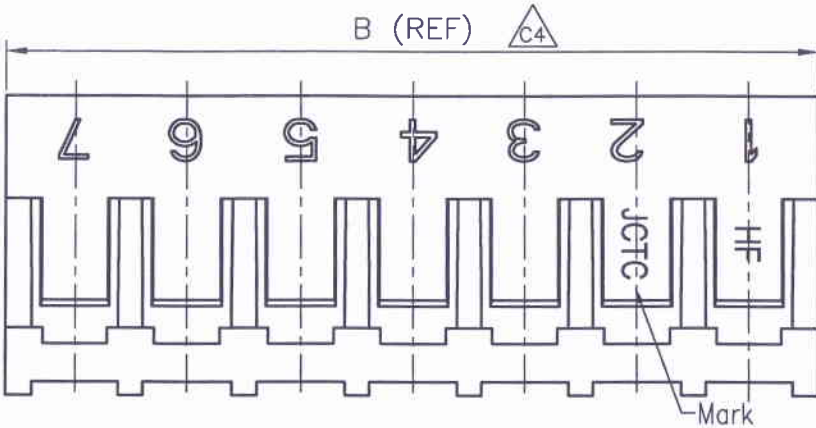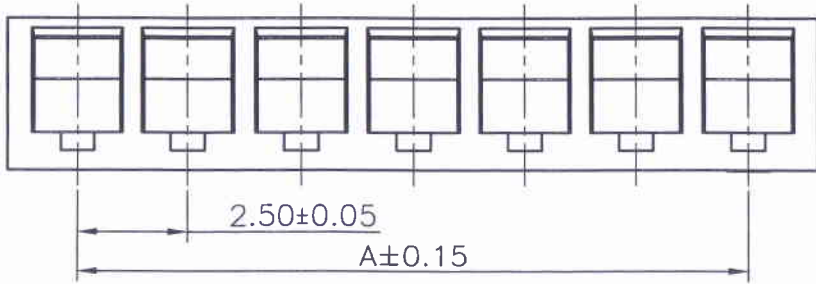

Dimensional Ordering Information:		
Part No	Dimensions	
	A	B
2P	2.5	5.6
3P	5.0	8.1
4P	7.5	10.6
5P	10.0	13.1
6P	12.5	15.6
7P	15.0	18.1
8P	17.5	20.6
9P	20.0	23.1
10P	22.5	25.6
11P	25.0	28.1
12P	27.5	30.6
13P	30.0	33.1
14P	32.5	35.6
15P	35.0	38.1
16P	37.5	40.6

Part No.	Material	Color
22501H00-NP-B	Nylon 66,UL94V-0	本色
22501H00-NP-B-NK	Nylon 66,UL94V-0	本色
22501H00-NP-B-HF	Nylon 66,UL94V-0	无卤材料
22501H00-NP-B-HF-NK	Nylon 66,UL94V-0	无卤材料

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司 TITLE: SCN 2.50mm Pitch Housing	PART. NO:
C2	HR1105280083	11.05.28	L INEAR	1:1				22501H00-NP-B-XX-XX
C3	HR1107300114	11.07.30	0.0±0.25		APPROVED			DWG. NO:
C4	"B"尺寸改为参考尺寸	16.02.22	X° REF±6°		DESIGNER			ENDE05
C5	更新公司名称	17.03.09	X° ±3°		DRAWN			REV: C5 SHEET: 1/1

1 2 3 4 5 6 7 8