

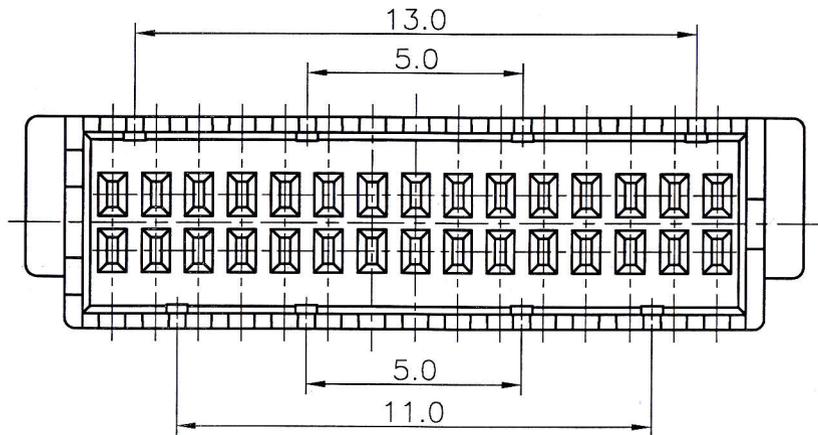
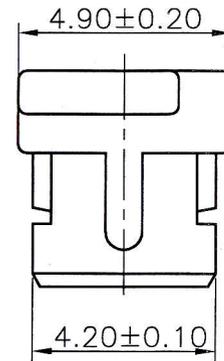
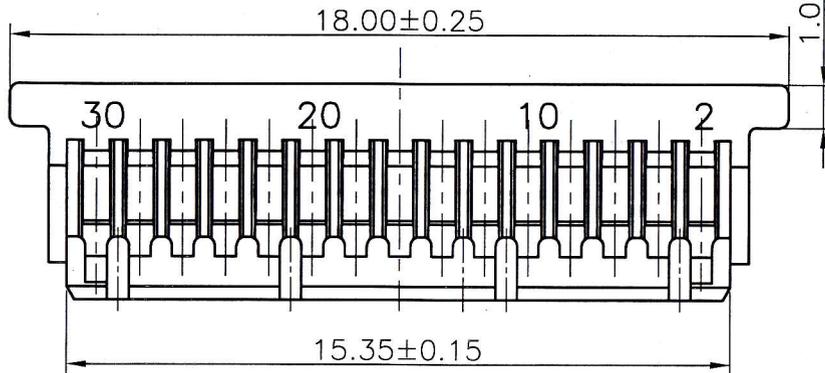


环保物料

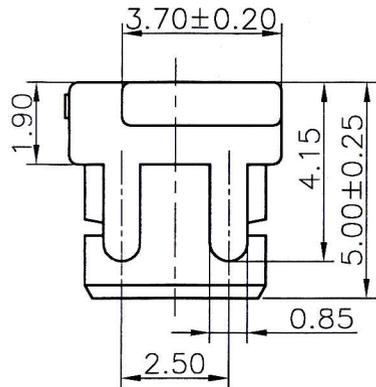

Specifications:  
 Rated Voltage : 50V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

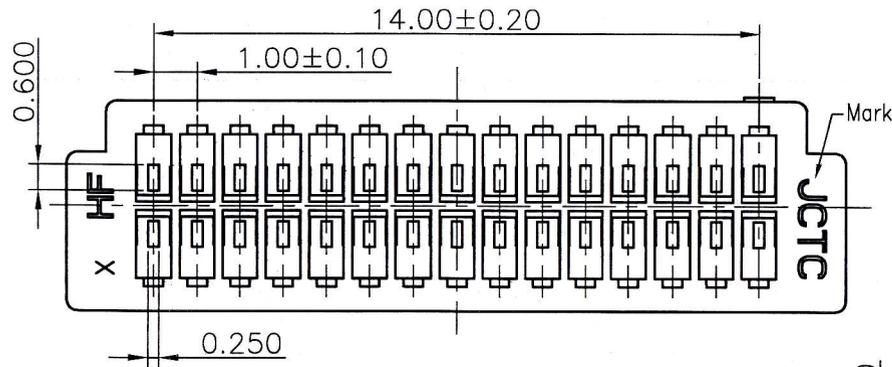

11002H00-2X15P-HF-S1

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ HF : Halogen Free
- ⑤ S1: S1 TYPE

Suitable for JCTC 11002 series terminal

Part No.	Material	Color
11002H00-2X15P-HF-S1	Nylon 66,UL94V-0	Natural(White)

一般公差 GENERAL TOLERANCE

X.X	±0.25	X'	±5'
X.XX	±0.15	X.X'	±2'
X.XXX	±0.08	▲	MAJOR DIM.

单位 UNIT  
mm

绘图 DR. 欧阳小强  
 校对 CHK. [Signature]  
 审核 [Signature]  
 核准 APPD. [Signature]

**JCTC** 终端 & 连接器

东莞胜蓝  
 东莞胜景  
 苏州伟聚  
 东莞富强

品名 TITLE  
 JST 1.00mm PITCH 双排 HOUSING

料号 PART NO.  
 11002H00-2X15P-HF-S1  
 文件编号 NUMBER  
 ENDE05

比例 SCALE 1/1  
 SHEET 1/1  
 版次 REV. C0

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
C0	13.03.18	新图面发行	樊友莲	王志刚