

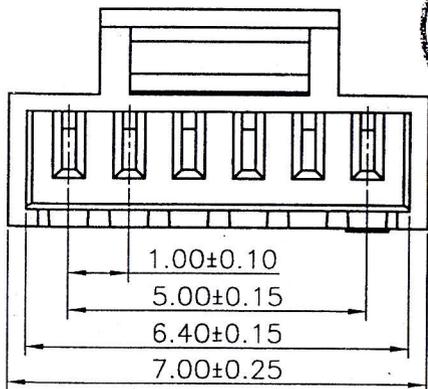
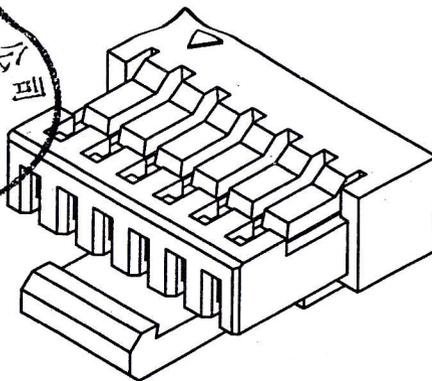


环保物料

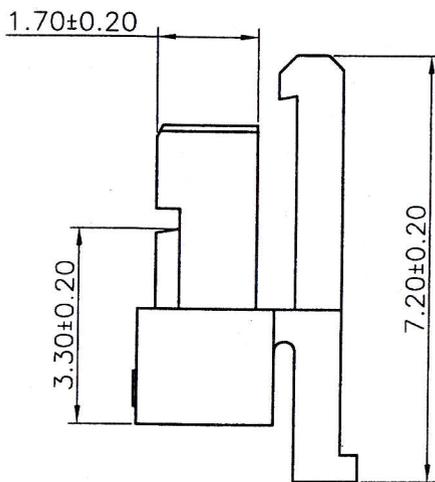


Specifications:
 Rated Voltage : 125V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 After Environmental Testing : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

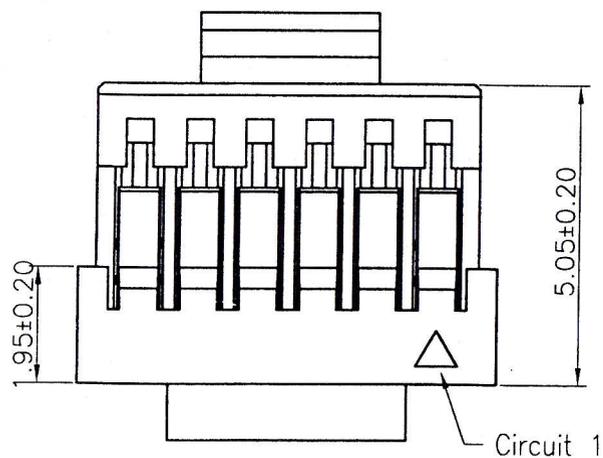

11008H00-6P-L-S2-HF
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ L: Lock Type
- ⑤ S2: S2 TYPE
- ⑥ HF: Halogen Free



Part No.	Material	Color
11008H00-6P-L-S2-HF	Nylon66,UL 94V-0	White

					一般公差 GENERAL TOLERANCE X.X ±0.25 X' ±5' X.XX ±0.15 X.X' ±2' X.XXX ±0.08 ▲ MAJOR DIM.		绘图 DR. 伍文聪 校对 CHK. [Signature] 审核 CHK. [Signature] 核准 APPD. [Signature]	JCTC® TERMINAL & CONNECTORS 品名 TITLE 1.0mm PITCH Housing - Lock Type	料号 PART NO. 11008H00-6P-L-S2-HF 文件编号 NUMBER ENDE05
版次 REV	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm	比例 SCALE	SHEET	版次 REV.
C0	13.06.25	新版图面发行	樊友连	王志刚			1/1	1/1	C0