

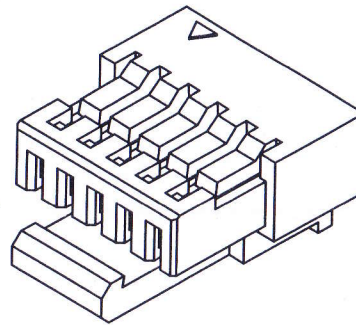
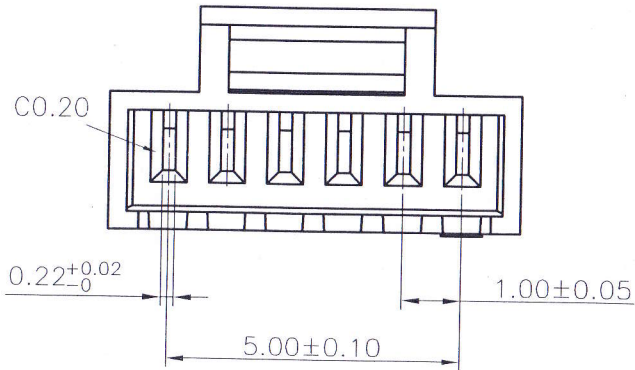
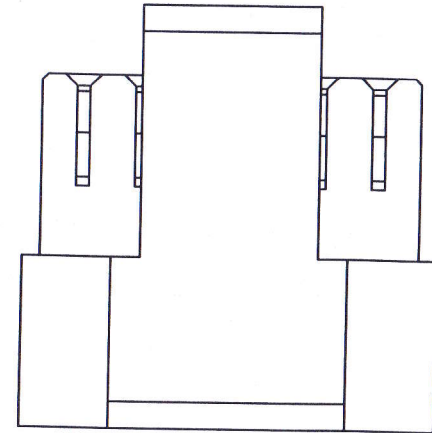
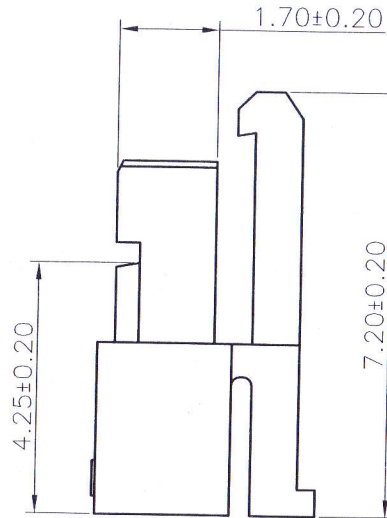


环保物料

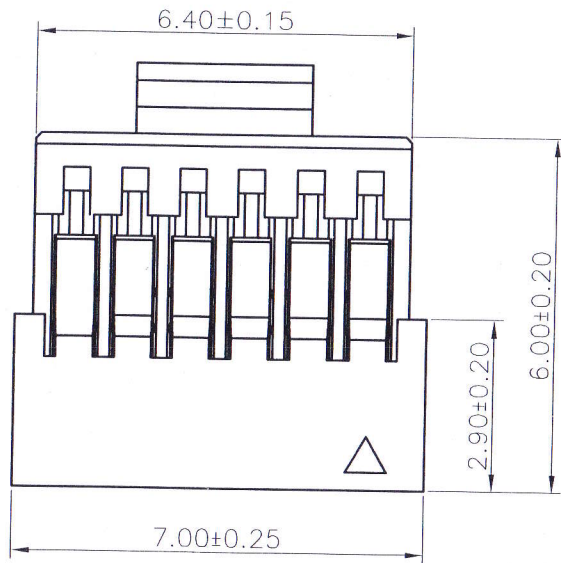

Specifications:
 Rated Voltage : 125V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 After Environmental Testing : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

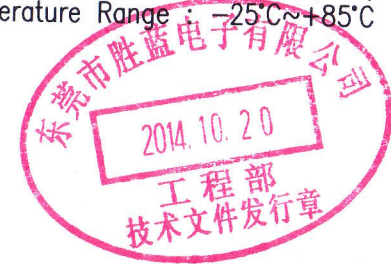

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
C0	新图面发行	14.10.20	LINEAR	ANGLES	1:1	杨朝阳	14.10.20
			0.0±0.25	X° REF±6°	APPROVED	任文强	14.10.20
			0.00±0.15	X° ±3°	DESIGNER	杨朝阳	14.10.20
			0.000±0.08	X° X'±2°	DRAWN	杨朝阳	14.10.20

Part No.	Material	Color
11008H00-6P-L1-HF-NK	Nylon66,UL 94V-0	White
JCTC ® <input type="checkbox"/> 苏州伟聚 <input type="checkbox"/> 东莞胜景 TERMINAL&CONNECTORS <input checked="" type="checkbox"/> 东莞胜蓝		PART NO: 11008H00-6P-L1-HF-NK
TITLE: (Pin孔宽度0.22mm) 1.0mm Pitch Housing - Lock Type		DWG NO: ENDE05
		REV: C0 SHEET: 1/1