

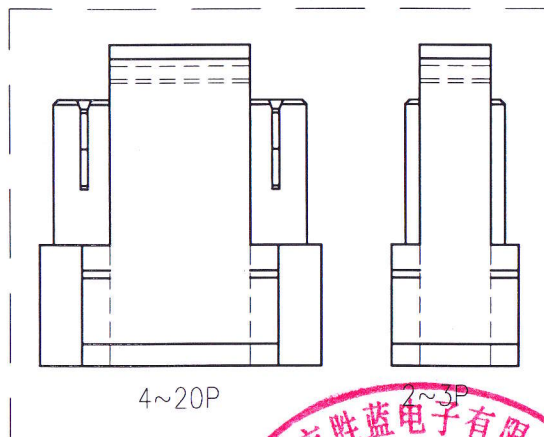




环保物料

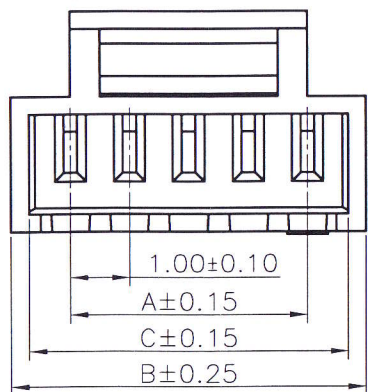

Specifications:  
 Rated Voltage : 125V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 After Environmental Testing : 30mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -25°C~+85°C

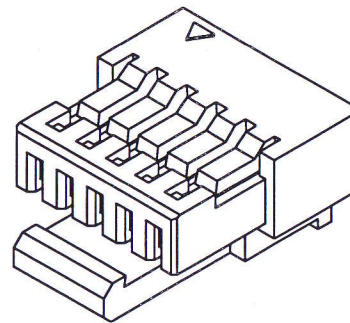

Ordering Information			
Dimensions			
PART NO.	Dimensions		
	A	B	C
2P	--	3.00	2.40
3P	2.00	4.00	3.40
4P	3.00	5.00	4.40
5P	4.00	6.00	5.40
6P	5.00	7.00	6.40
7P	6.00	8.00	7.40
8P	7.00	9.00	8.40
9P	8.00	10.00	9.40
10P	9.00	11.00	10.40
11P	10.00	12.00	11.40
12P	11.00	13.00	12.40
13P	12.00	14.00	13.40
14P	13.00	15.00	14.40
15P	14.00	16.00	15.40
16P	15.00	17.00	16.40
17P	16.00	18.00	17.40
18P	17.00	19.00	18.40
19P	18.00	20.00	19.40
20P	19.00	21.00	20.40

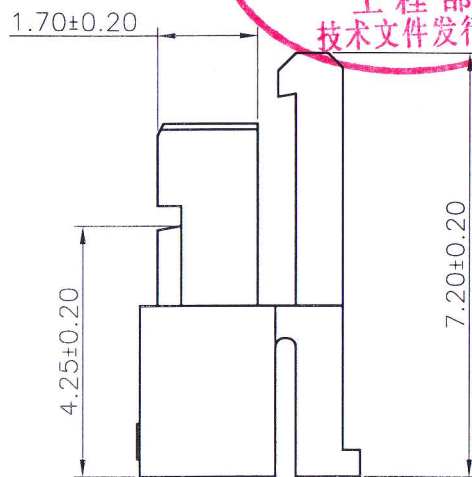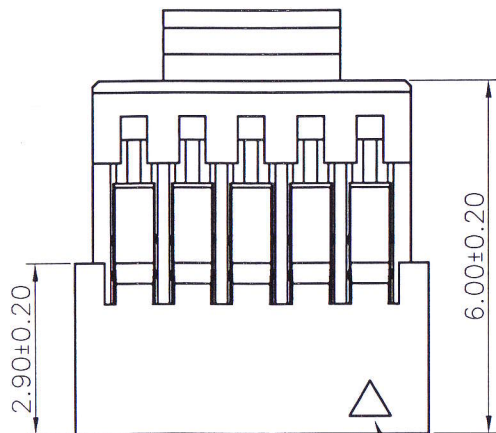

11008H00-NP-L-HF-NK

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ L: Lock Type
- ⑤ HF: Halogen Free
- ⑥ NK: NO Mark

Part No.	Material	Color
11008H00-NP-L-HF-NK	Nylon66,UL 94V-0	White

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
C0	新图面发行	14.08.25	LINEAR	ANGLES	1:1	杨朝阳	14.08.25
			0.0±0.25	X° REF±6°	APPROVED	杨朝阳	14.08.25
			0.00±0.15	X° ±3°	DESIGNER	杨朝阳	14.08.25
			0.000±0.08	X° X'±2°	DRAWN	杨朝阳	14.08.25

**JCTC**®  苏州伟聚  东莞胜景  
 TERMINAL&CONNECTORS  东莞胜蓝

TITLE:  
 1.0mm PITCH Housing - Lock Type

PART. NO:	
11008H00-NP-L-HF-NK	
DWG. NO:	
ENDE05	
REV:	SHEET:
C0	1/1