
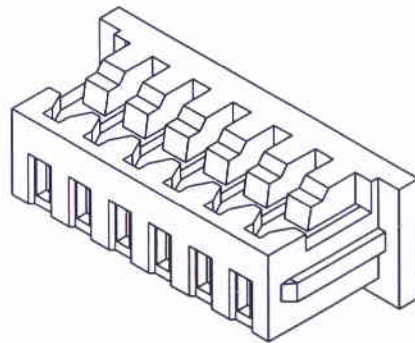





RoHS

4P~20P 规格

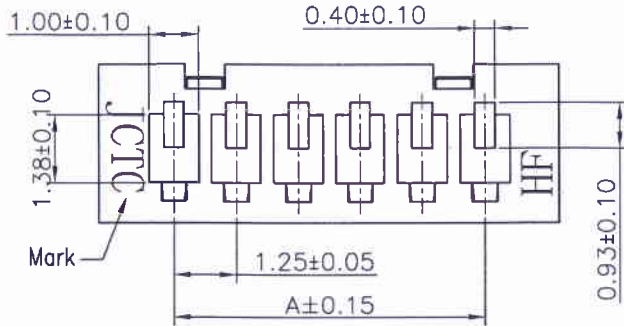

Specifications:
 Rated Voltage : 125V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 250V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -40°C~+85°C

Dimensional Ordering Information:			
Part No	Dimensions		
	A	B	C
2P		3.00	4.25
3P	2.50	4.25	5.50
4P	3.75	5.50	6.75
5P	5.00	6.75	8.00
6P	6.25	8.00	9.25
7P	7.50	9.25	10.50
8P	8.75	10.50	11.75
9P	10.00	11.75	13.00
10P	11.25	13.00	14.25
11P	12.50	14.25	15.50
12P	13.75	15.50	16.75
13P	15.00	16.75	18.00
14P	16.25	18.00	19.25
15P	17.50	19.25	20.50
16P	18.75	20.50	21.75
17P	20.00	21.75	23.00
18P	21.25	23.00	24.25
19P	22.50	24.25	25.50
20P	23.75	25.50	26.75

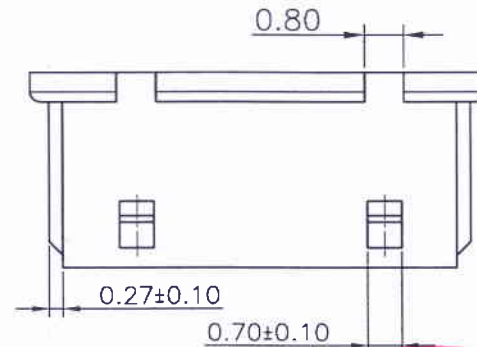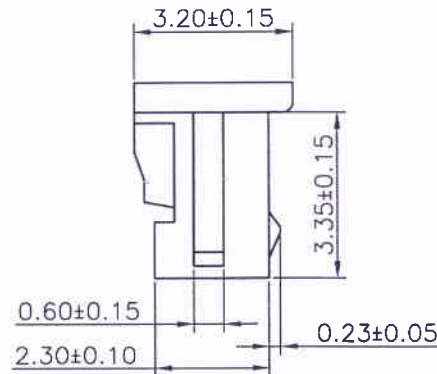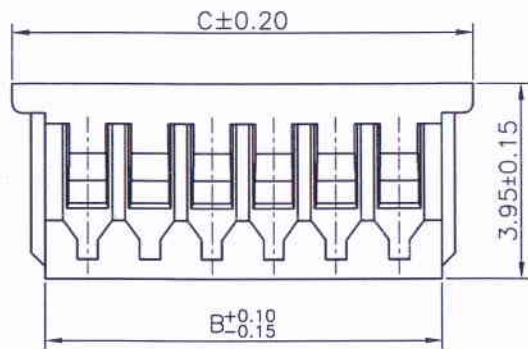

11251H00-NPX-HF-S1

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ HF : Halogen Free
- ⑥ S1: S1 Type



Suitable for JCTC 11251 series terminal

Part No.	Material	Color
11251H00-NP-HF-S1	Nylon 66,UL94V-0	本色
11251H00-NPA-HF-S1	Nylon 66,UL94V-0	黑色无卤

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO: 11251H00-NPX-HF-S1
A0	新图面发行	17.04.10	LINEAR 0.0±0.25	1:1	APPROVED			
			0.00±0.15		DESIGNER		REV: A0	
			0.000±0.08		DRAWN	邓群庄 17.04.10	SHEET: 1/1	
							TITLE: MX 1.25mmPITCH HOUSING	