

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C

D

E

F







G

H

11252H00-2xNPX-L2-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
A : Black type
- ⑤ L2: Lock TYPE
- ⑥ HF: Halogen Free

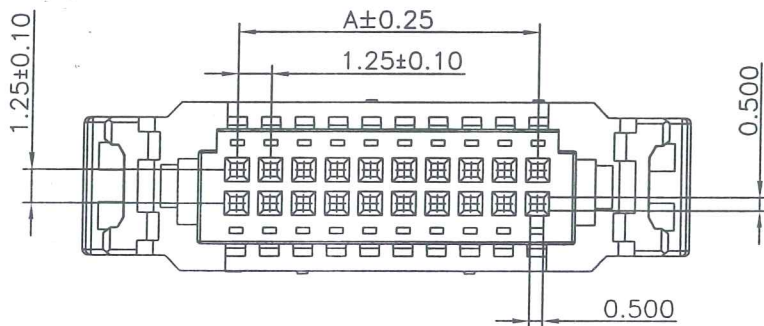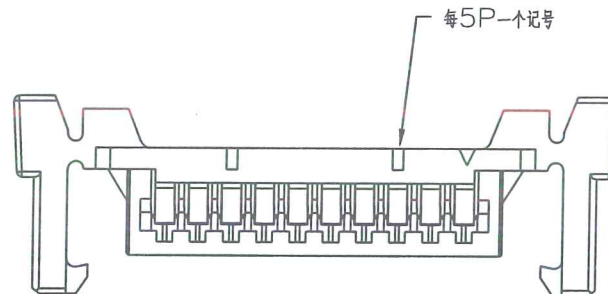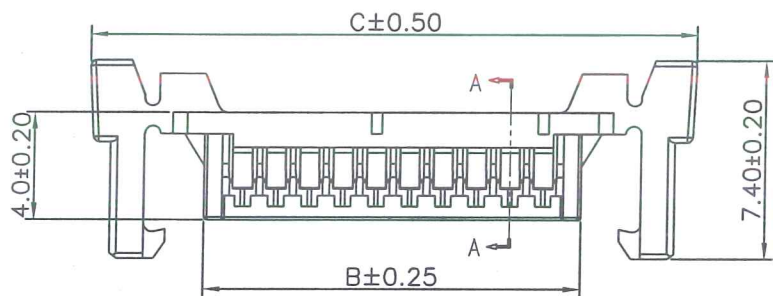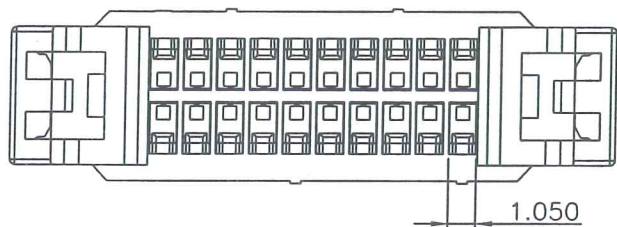

Specifications:
 Rated Voltage : 100V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 500MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



Circuit	Dimensions		
	A	B	C
2x5P	5.00	7.85	16.45
2x10P	11.25	14.10	22.70
2x15P	17.50	20.35	28.95
2x20P	23.75	26.60	35.20

Part No.	Material	Color
11252H00-2xNP-L2-HF	Nylon 66,UL94V-0	Natural(White)
11252H00-2xNPA-L2-HF	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	JCTC® TERMINAL&CONNECTORS
A0	新图面发行	18.05.16	 L: 0.0±0.25 X: X° REF±6° UNIT: MM SIZE: A4	 X° ±3° X° X'±2°	1:1			11252H00-2xNPX-L2-HF	ENDE05	
A1	HN2105130122	21.05.13			APPROVED	Nelson	21.05.13			TITLE:
					DESIGNER	mw	21.05.13	1.25mm PITCH HOUSING --- LOCK TYPE (短扣型)		REV: A1
					DRAWN	ZZK	21.05.13			SHEET: 1/1

1

2

3

4

5

6

7

8